MIL-O-48465B(AR)
30 June 1981
SUPERSEDING
MIL-O-48465A(AR)
1 March 1976

# MILITARY SPECIFICATION

## OUTPUT UNIT: 11733100

This specification is approved for use by the US Army Armament Research and Development Command (ARRADCOM) and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Output Unit: 11733100 which is a unit of the M21 Ballistic Computer, 11732979.

## 2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| BB-N-411 | Nitrogen, Technical |

MILITARY

| | |
|---|---|
| MIL-F-13926 | Fire Control Materiel; General Specification Governing the Manufacture and Inspection of |
| MIL-I-45607 | Inspection Equipment, Acquisition, Maintenance and Disposition of |
| MIL-STD-45662 | Calibration System Requirements |

FSC 1220

**Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26103:562
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-810 | Environmental Test Methods |

DRAWINGS

ARRADCOM

| | |
|---|---|
| 11733100 | Output Unit |

Inspection Equipment

| | |
|---|---|
| 11750233 | Test Set - Computer FAT |
| 11821457 | Fixture Shock - Vertical and Horizontal Plane |
| 11821458 | Shock Adapter, Plate Vib Horz-Vert Plane/ Shock - Z |
| 11821748 | Test Set - Immersion Leak, Purge and Fill |
| 11822351 | Output Unit - FAITE |

Packaging Data Sheet

| | |
|---|---|
| P11733100 | Packaging of Output Unit: 11733100 |

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The Output Unit, herein referred to as the assembly, shall be manufactured in accordance with Drawing 11733100 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification. (See 4.5.1)

3.1.1 Function. The assembly shall provide shaft rotation from input signals of the computer.

3.1.2 General specifications. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

| | | |
|---|---|---|
| a. | Temperature | $73^{\circ} \pm 18^{\circ}F$ |
| b. | Relative humidity | 50 percent $\pm$ 30 percent |
| c. | Atmospheric pressure | 28.5 + 2.0 -3.0 in. Hg. |

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under standard ambient conditions of 3.1.3.

3.3.1 Output accuracy. The following requirements shall be met with a torque of 6.25 + 2.0 -0 inch-pounds coupled to the ballistic drive shaft.

3.3.1.1 Counter readout. With the ratio select switch positions and the ratio transformer settings of table I applied, the counter readouts shall be within $\pm$0.1 mil of those specified in table I. (See 4.6.2.1)

3.3.1.2 Ballistic drive shaft position. With the ratio select switch positions and the ratio transformer settings of table I applied, the ballistic drive shaft positions shall be within $\pm$7.2 degrees of those specified in table I. (See 4.6.2.2)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

3.3.1.3 Superelevator shaft position. With the ratio select switch positions and the ratio transformer settings of table II applied, the superelevator shaft positions shall be within ±5.76 degrees of those specified in table II. (See 4.6.2.3)

3.3.2 Sensitivity. With the torque of 6.25 + 2.0 -0 inch-pounds coupled to the ballistic drive output shaft, the amount of command signal change required to effect a change in the mil counter reading shall be not greater than 0.05 mil which is a change of 0.00058 in the ratio transformer setting. (See 4.6.2.4)

TABLE I. Accuracy requirements for ballistic drive shaft and counter.

| Item | Input Conditions | | | Output Conditions | |
|---|---|---|---|---|---|
| | Ratio Select Switch Position | Command Signal (mil) 1/ | Ratio Transformer Setting | Counter Reading (mils) | Ballistic Drive Shaft Position (degrees) 2/ |
| 1 | A | 0 | 0.0000 | 0.00 | 0 |
| 2 | A | 10 | 0.1160 | 10.00 | 0 |
| 3 | A | 20 | 0.2320 | 20.00 | 0 |
| 4 | A | 30 | 0.3480 | 30.00 | 0 |
| 5 | A | 40 | 0.4640 | 40.00 | 0 |
| 6 | A | 50 | 0.5800 | 50.00 | 0 |
| 7 | A | 60 | 0.6960 | 60.00 | 0 |
| 8 | A | 70 | 0.8120 | 70.00 | 0 |
| 9 | A | 80 | 0.9280 | 80.00 | 0 |
| 10 | A | 70 | 0.8120 | 70.00 | 0 |
| 11 | A | 60 | 0.6960 | 60.00 | 0 |
| 12 | A | 50 | 0.5800 | 50.00 | 0 |
| 13 | A | 40 | 0.4640 | 40.00 | 0 |
| 14 | A | 30 | 0.3480 | 30.00 | 0 |
| 15 | A | 20 | 0.2320 | 20.00 | 0 |
| 16 | A | 10 | 0.1160 | 10.00 | 0 |
| 17 | A | 0 | 0.0000 | 0.00 | 0 |
| 18 | B | - 5 | -0.0580 | 95.00 | 0 |
| 19 | B | -10 | -0.1160 | 90.00 | 0 |
| 20 | B | - 5 | -0.0580 | 95.00 | 0 |
| 21 | B | 0 | 0.0000 | 0.00 | 0 |

1/ Reference only. Command signals are applied by ratio transformer settings.

2/ The ballistic drive shaft position shall rotate 720 degrees counterclockwise, as viewed facing shaft extension end, for each 10 mil positive increment of command signal input.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

TABLE II. Accuracy requirements for superelevator shaft.

| Item | Input Conditions | | | Output Conditions | |
|---|---|---|---|---|---|
| | Ratio Select Switch Position | Command Signal (mil) 1/ | Ratio Transformer Setting | Counter Reading (mils) | Superelevator Shaft Position (degrees) 2/ |
| 1 | A | 0 | 0.0000 | 0.00 | 0 |
| 2 | A | 6.25 | 0.0725 | 6.25 | 0 |
| 3 | A | 25 | 0.2900 | 25.00 | 0 |
| 4 | A | 50 | 0.5800 | 50.00 | 0 |
| 5 | A | 25 | 0.2900 | 25.00 | 0 |
| 6 | A | 6.25 | 0.0725 | 6.25 | 0 |
| 7 | A | 0 | 0.0000 | 0.00 | 0 |
| 8 | B | -6.25 | -0.0725 | 93.75 | 0 |
| 9 | B | 0 | 0.0000 | 0.00 | 0 |

1/ Reference only. Command signals are applied by ratio transformer settings.

2/ The superelevator shaft shall rotate 360 degrees counter clockwise for each 6.25 mil positive increment of command signal input.

3.3.3 Output variable resistor gear train backlash. Backlash between the variable resistor setting and the ballistic drive output shaft position as measured at the output shaft shall be not greater than 0.025 mils. (See 4.6.2.5)

3.3.4 Slew speed. Connect the assembly with a load not less than 6.25 inch-pounds to the ballistic drive output shaft and the counter readout set of 0 mil (ratio transformer setting of 0.0000). Upon application of a step function command signal of 50 mils (ratio transformer setting of 0.5800), the assembly shall slew to 50 mils counter readout within a running time not greater than 4 seconds. (See 4.6.2.6)

3.3.5 Counter excursion. The mil counter excursion shall cover a range of not greater than minus 13 to not less than plus 85 mils. (See 4.6.2.7)

3.3.6 Counter backlash. Backlash between the mil counter and the ballistic drive output shaft shall be not greater than 0.05 mils. (See 4.6.2.8)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

3.3.7 Output torque. Under the conditions specified in 3.3.4, except that an output load of 12 +0, -1 inch-pounds shall be coupled to the ballistic drive output shaft, the ballistic drive shaft shall slip and the mil counter shall not change reading. (See 4.6.2.9)

3.3.8 Illumination. With 28V applied from 9J1-R to 9J1-P, the mil counter shall be illuminated. (See 4.6.2.10)

3.4 Sealing. With an internal nitrogen pressure of 5.0 ±0.1 psig, the assembly shall exhibit a pressure drop not greater than 0.2 psig in not less than 2 hours. The pressurized assembly shall be purged with dry nitrogen in accordance with BB-N-411, type I, grade B, class I, with a dewpoint of -25°F or lower and shall have a final pressure of 0.0 + 0.2 -0.0 psig. (See 4.6.4)

3.5 Environmental.

3.5.1 Shock. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 40 ± 4 gravity units (g) for a duration of 18 ± 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 125.0 ± 12.5 g for a duration of 5.0 ± 0.2 msec applied in each direction along three mutually perpendicular axes. (See 4.6.3.1)

3.5.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 1. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.3.2)

3.5.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +125°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.5.4 Storage temperature. The assembly shall be capable of operating as specified herein after exposure to storage temperatures ranging from -65°F to +160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.5.5 Humidity. The assembly shall operate as specified herein at up to 100 percent relative humidity. (See 4.6.3.6)

3.5.6 Altitude. The assembly shall operate as specified herein under the following conditions:

a. during exposure to an atmospheric pressure equivalent to 10000 feet above sea level.

b. after exposure to an atmospheric pressure equivalent to 40000 feet above sea level for not less than 1 hour. (See 4.6.3.7)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

3.5.7 Dust. The assembly shall operate as specified herein after exposure to moving dust for not less than 12 hours at velocities up to 1750 feet per minute. (See 4.6.3.8)

3.5.8 Salt fog. The assembly shall operate as specified herein after exposure to a 5 percent sodium chloride atomized spray for not less than 48 hours. (See 4.6.3.9)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

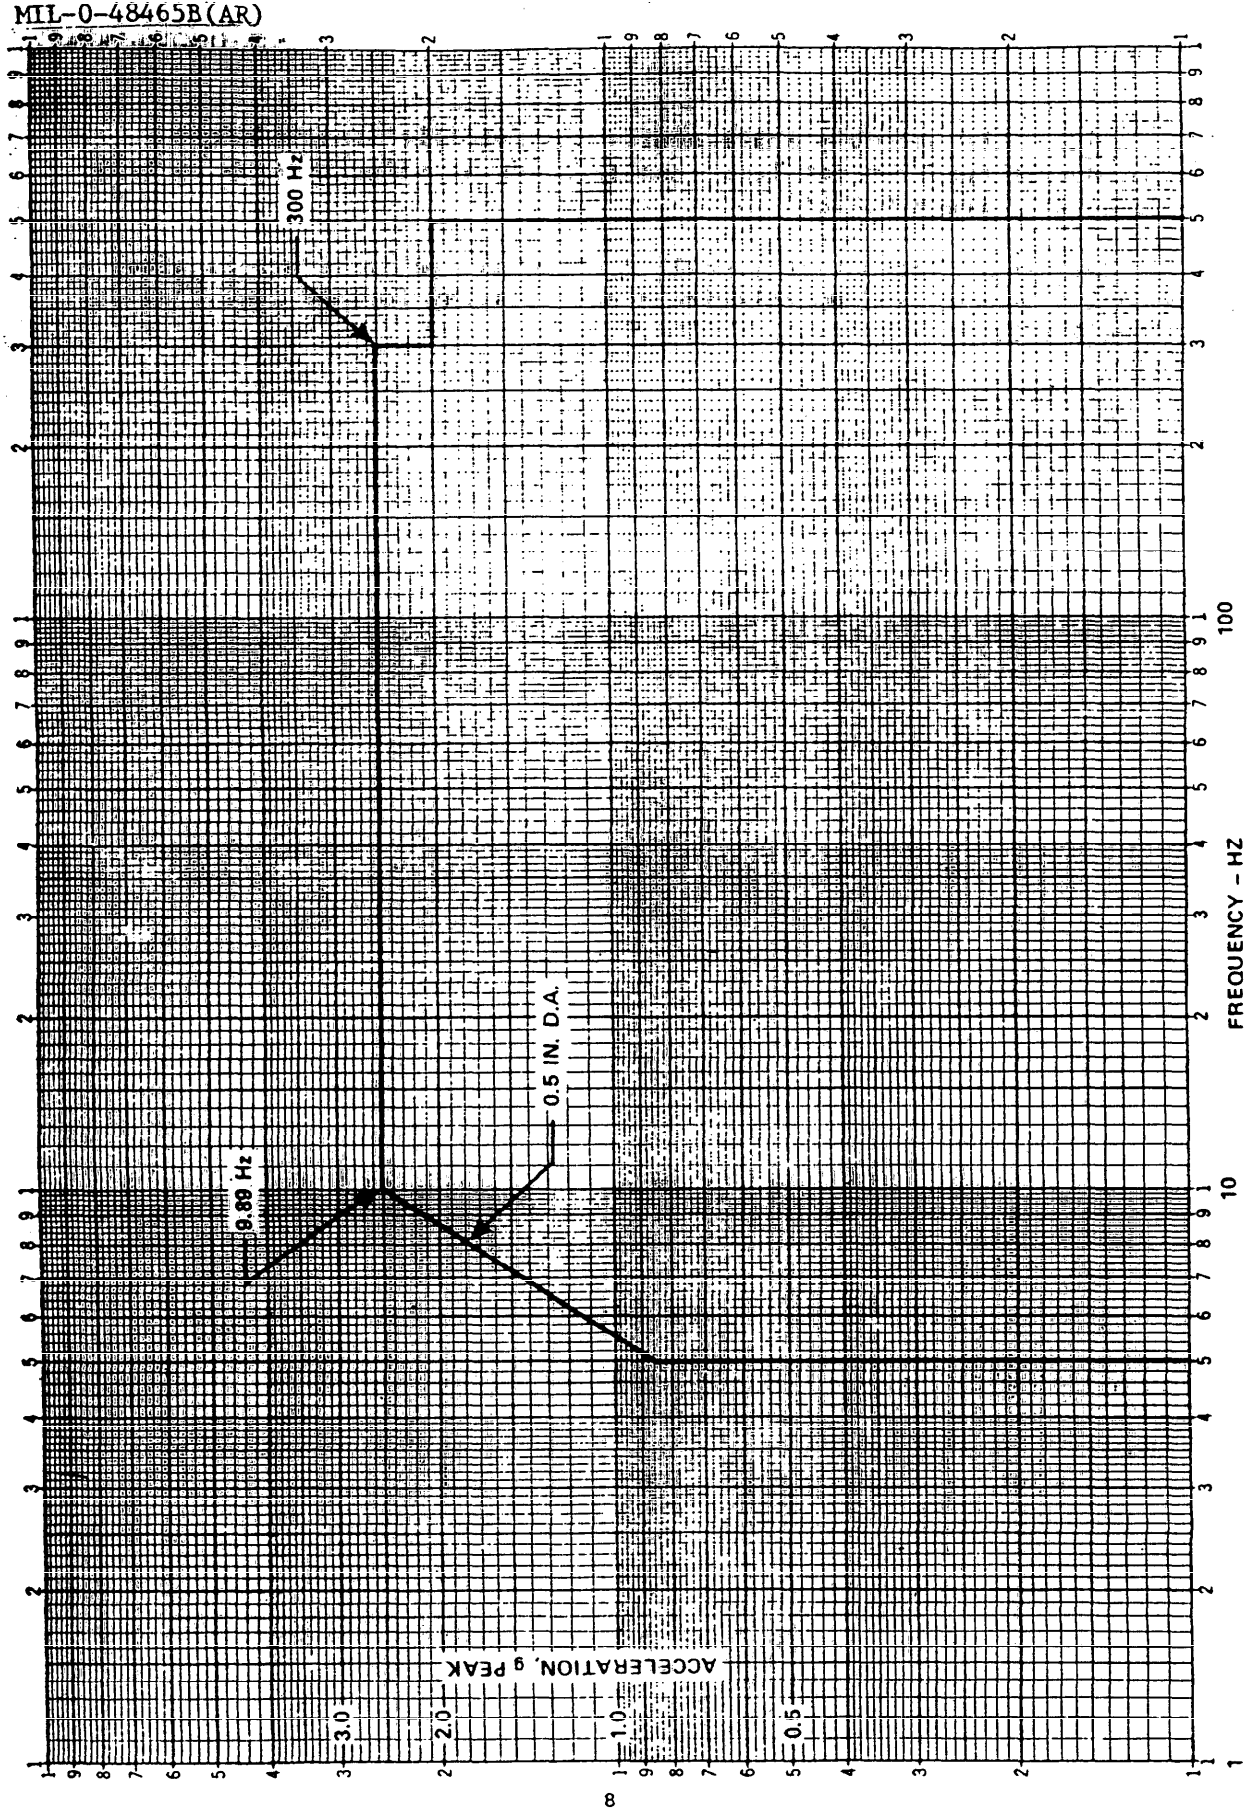



FIGURE 1. Vibration profile.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification, where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract.

4.4.1 Sample. The first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in table III.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

TABLE III. First article test.

| Item | Characteristic | Requirement | Test Procedure |
|---|---|---|---|
| 1 | Fabrication | 3.1 | Applicable drawings-Visual |
| 2 | General Specification | 3.1.2 | MIL-F-13926 - Visual |
| 3 | Counter Readout | 3.3.1.1 | 4.6.2.1 |
| 4 | Ballistic Drive Shaft Position | 3.3.1.2 | 4.6.2.2 |
| 5 | Superelevator Shaft Position | 3.3.1.3 | 4.6.2.3 |
| 6 | Sensitivity | 3.3.2 | 4.6.2.4 |
| 7 | Output Variable Resistor Geartrain Backlash | 3.3.3 | 4.6.2.5 |
| 8 | Slew Speed | 3.3.4 | 4.6.2.6 |
| 9 | Counter Excursion | 3.3.5 | 4.6.2.7 |
| 10 | Counter backlash | 3.3.6 | 4.6.2.8 |
| 11 | Output torque | 3.3.7 | 4.6.2.9 |
| 12 | Illumination | 3.3.8 | 4.6.2.10 |
| 13 | Sealing A and B | 3.4 | 4.6.4 |
| 14 | High temperature | 3.5.3 and 3.5.4 | 4.6.3.3 |
| 15 | Low temperature | 3.5.3 and 3.5.4 | 4.6.3.4 |
| 16 | Humidity | 3.5.3 | 4.6.3.6 |
| 17 | Altitude | 3.5.6 | 4.6.3.7 |
| 18 | Shock | 3.5.1 | 4.6.3.1 |
| 19 | Vibration A | 3.5.2 | 4.6.3.2 |
| 20 | Dust | 3.5.7 | 4.6.3.8 |
| 21 | Salt fog | 3.5.8 | 4.6.3.9 |
| 22 | Temperature cycling | 3.5.3 and 3.5.4 | 4.6.3.5 |

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

| | Use | Plan |
|---|---|---|
| a. | Logistics spare assembly apart from the next higher assembly | A and C |
| b. | Component assembly of the next higher assembly | B and C |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in table V.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table VI shall be applied separately to each assembly in the sample.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table V and only the test of item 307 in table VI shall be applied.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with MIL-STD-105.

4.5.4. Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table IV and shall be examined visually for completeness, improper assembly and evidence of poor workmanship.

4.5.4.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. The sampling and inspection of the preservation - packaging, packing and container marking shall be in accordance with the provisions of packaging data sheet P11733100.



Source: https://assist.dla.mil -- Downloaded: 202610-26T03:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Performance tests.

| Item | Characteristic | Requirement | Test Procedure |
|---|---|---|---|
| 101 | Counter readout | 3.3.1.1 | 4.6.2.1 |
| 102 | Ballistic drive shaft position | 3.3.1.2 | 4.6.2.2 |
| 103 | Superelevator shaft position | 3.3.1.3 | 4.6.2.3 |
| 104 | Sensitivity | 3.3.2 | 4.6.2.4 |
| 105 | Output variable resistor gear train backlash | 3.3.3 | 4.6.2.5 |
| 106 | Slew speed | 3.3.4 | 4.6.2.6 |
| 107 | Counter excursion | 3.3.5 | 4.6.2.7 |
| 108 | Counter backlash | 3.3.6 | 4.6.2.8 |
| 109 | Torque | 3.3.7 | 4.6.2.9 |
| 110 | Illumination | 3.3.8 | 4.6.2.10 |
| 111 | Sealing A | 3.4 | 4.6.4 |

TABLE V. General tests.

| Item | Characteristic | Requirement | Test Procedure |
|---|---|---|---|
| 301 | Fabrication | 3.1 | Applicable drawings - Visual |
| 302 | General Specification | 3.1.2 | MIL-F-13926 - Visual |

TABLE VI. Environmental tests.

| Item | Characteristic | Requirement | Test Procedure |
|---|---|---|---|
| 303 | Shock | 3.5.1 | 4.6.3.1 |
| 304 | Vibration B | 3.5.2 | 4.6.3.2 |
| 305 | High Temperature | 3.5.3 and 3.5.4 | 4.6.3.3 |
| 306 | Low Temperature | 3.5.3 and 3.5.4 | 4.6.3.4 |
| 307 | Temperature Cycling | 3.5.3 and 3.5.4 | 4.6.3.5 |
| 308 | Sealing B | 3.4 | 4.6.4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.6 Methods of inspection.

4.6.1 Test equipment. The test equipment in table VII shall be used where specified to perform the required test.

TABLE VII. Test equipment.

| Item | Part Number | Nomenclature |
|---|---|---|
| 1 | 11750233 | Test Set - Computer FAT |
| 2 | 11821457 | Fixture Shock - Vertical and Horizontal Plane |
| 3 | 11821458 | Shock Adapter, Plate Vib Horz-Vert Plane/Shock-Z |
| 4 | 11821748 | Test Set - Immersion Leak, Purge and Fill |
| 5 | 11822351 | Output Unit - FAITE |

4.6.2 Performance tests.

4.6.2.1 Counter readout. Use item 5 of table VII to verify compliance with the requirements of 3.3.1.1.

4.6.2.2 Ballistic shaft position. Use item 5 of table VII to verify compliance with the requirements of 3.3.1.2.

4.6.2.3 Superelevator shaft position. Use item 5 of table VII to verify compliance with the requirements of 3.3.1.3.

4.6.2.4 Sensitivity. Use item 5 of table VII to verify compliance with the requirements of 3.3.2.

4.6.2.5 Output variable gear train backlash. Use item 5 of table VII to verify compliance with the requirements of 3.3.3.

4.6.2.6 Slew speed. Use item 5 of table VII to verify compliance with the requirements of 3.3.4.

4.6.2.7 Counter excursion. Use item 5 of table VII to verify compliance with the requirements of 3.3.5.

4.6.2.8 Counter backlash. Use item 5 of table VII to verify compliance with the requirements of 3.3.6.

4.6.2.9 Output torque. Use item 5 of table VII to verify compliance with the requirements of 3.3.7.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.6.2.10 Illumination. Use item 5 of table VII to verify compliance with the requirements of 3.3.8.

4.6.3 Environmental tests.

4.6.3.1 Shock.

4.6.3.1.1 Basic design. Use item 2 of table VII and subject the assembly to the shock test specified in MIL-STD-810, method 516.2, procedure I, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 40 ±4 G with a time duration of 18 ±3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

4.6.3.1.2 High intensity. Use item 2 of table VII and subject the assembly to the shock test specified in MIL-STD-810, method 516.2, procedure IV, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 125.0 ±12.5 g with a time duration of 5.0 ±0.2 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

4.6.3.2 Vibration. Application of Vibration A and Vibration B shall be as determined by the procurement conditions of 4.5.1 and the first article conditions of 4.4.

4.6.3.2.1 Vibration A. Use item 3 of table VII and subject the assembly to the vibration test specified in MIL-STD-810, method 514.2 procedure VIII, except that the test level shall be the vibration curve shown in figure 1 and duration of exposure shall be not less than 80 minutes per axis. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.3.3 High temperature. Subject the assembly to the high temperature test specified in MIL-STD-810, method 501.1, procedure I. The highest operating temperature shall be 125°F. The performance tests of 4.6.2 shall be applied.

4.6.3.4 Low temperature. Subject the assembly to the low temperature test specified in MIL-STD-810, method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of 4.6.2 shall be applied.



Source: https://assist.dla.mil -- Downloaded: 202640-26T03:56Z
Check the source to verify that this is the currentversion before use.

4.6.3.5 Temperature cycling. With power and loads applied, subject the assembly to the temperature profile specified in figure 2. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2

4.6.3.6 Humidity. Place the assembly in a humidity chamber and subject it to the humidity test specified in MIL-STD-810, method 507.1, procedure IV. During steps 4, 6 and 8 of procedure IV, subject the assembly to the performance tests of 4.6.2. After exposure, subject the assembly to the performance tests of 4.6.2.

4.6.3.7 Altitude. Use item 1 of table VII and subject the assembly to the altitude test specified in MIL-STD-810, method 500.1, procedure I, except that:

a. First, the assembly in a non-operating condition, shall be exposed to an atmospheric pressure equivalent to 40000 feet above sea level for a period of not less than 1 hour.

b. Second, with the chamber pressure increased to an atmospheric equivalent to 10000 feet above sea level, subject the assembly to the performance tests of 4.6.2.

4.6.3.8 Dust. Subject the assembly to the dust test specified in MIL-STD-810, method 510.1, procedure I. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.

4.6.3.9 Salt fog. Subject the assembly to the corrosion test specified in MIL-STD-810, method 509.1, procedure I. At the conclusion of this test, subject the assembly to the performance tests of 4.6.2.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

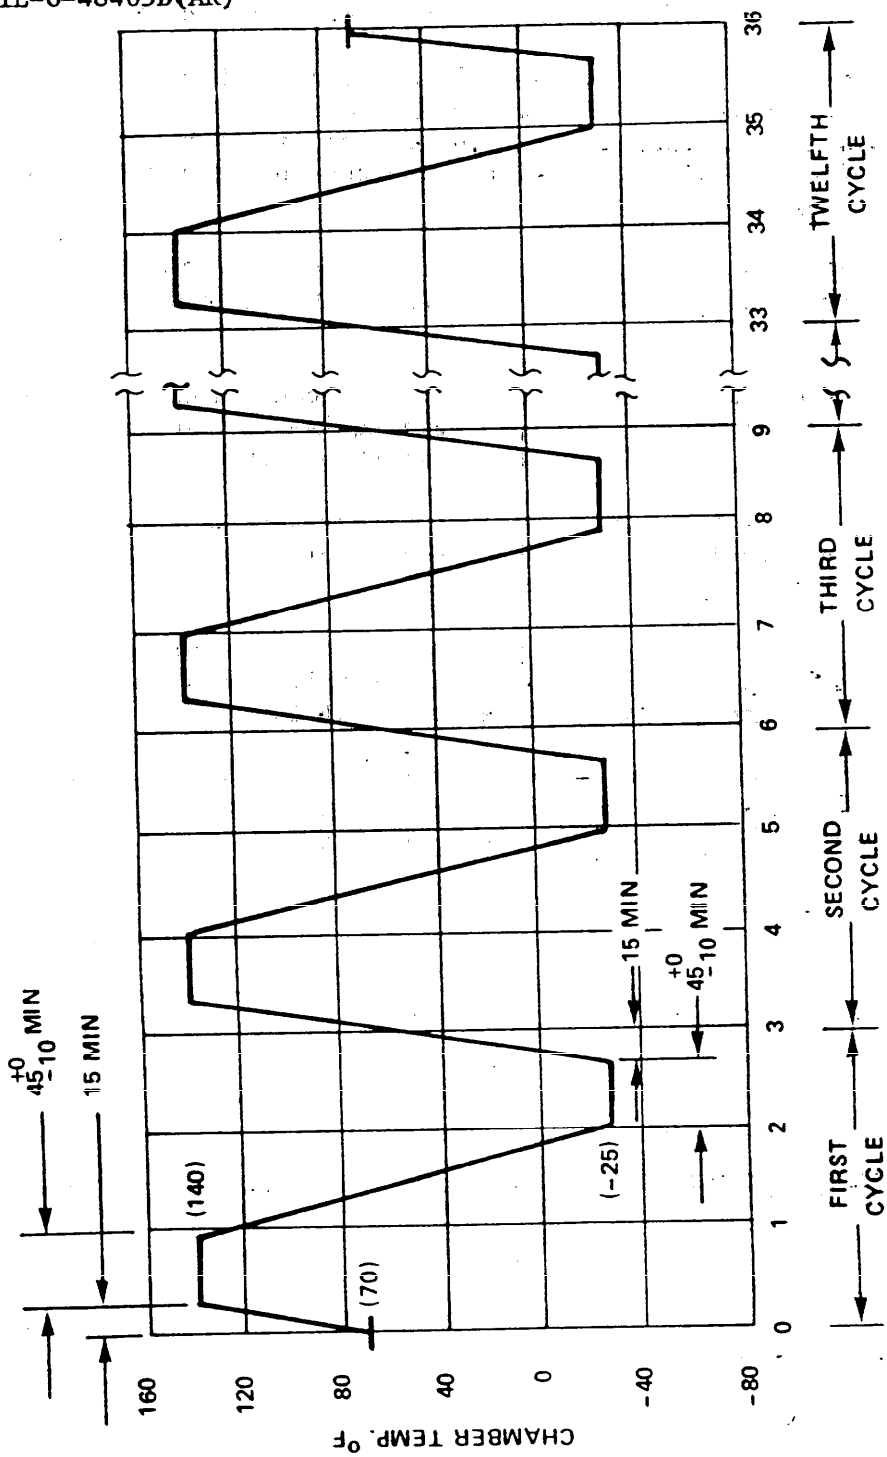



FIGURE 2 Temperature cycling.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.6.4 Sealing. Pressurize the assembly with nitrogen to 5.0 ± 0.1 psig and perform either Sealing A or Sealing B leakage tests. After determination of compliance with the sealing requirement, purge the assembly with dry nitrogen at 1 psig for not less than 5 minutes and lower the pressure to 0.0 + 0.2 - 0.0 psig. Nitrogen shall be BB-N-411, type I, class 1, grade B with a dewpoint not greater than -25°F.

4.6.4.1 Test selection. Application of Sealing A and Sealing B shall be as determined by the procurement conditions of 4.5.1 and the first article conditions of 4.4.

4.6.4.2 Sealing A. Use item 4 of table VII and subject the assembly to the leakage (immersion) test specified in MIL-STD-810, method 512.1, procedure IV. The immersion period shall be not less than 5 minutes.

4.6.4.3 Sealing B. Use item 4 of table VII, place the assembly in the following environment for not less than 2 hours and verify that the pressure drop is not greater than 0.2 psig.

| | | |
|---|---|---|
| a. | Temperature | 73° ± 2.5°F |
| b. | Relative humidity | 50 percent ± 5 percent |
| c. | Atmospheric pressure | 28.5 + 2.0 - 3.0 in. Hg. |

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P11733100. The level of protection shall be as specified in the procurement document. (See 4.5.6)

6. NOTES

6.1 Intended use. The assembly is a part of the M21 Ballistic Computer System.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Special tests and examination as required (see 4.3.2), the type of inspection required (see 4.3), and the activity responsible for testing and its facility.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

c. Applicable packaging data sheet number (see 5.1).

d. Selection of applicable levels of preservation, packaging and packing.

e. Applicable stock number.

f. First article inspection requirements.

6.3 Previous revisions of MIL-O-48465B was for the US Army Armament Research and Development Command's internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

Custodian:
Army-AR

Preparing Activity:
Army-AR
Project 1220-A289



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-O-48465B OUTPUT UNIT: 11733100

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.