INCH-POUND
MIL-P-48494A(AR)
01 May 1995
(see 6.4)

MILITARY SPECIFICATION

POSITIONER, MIRROR, AZIMUTH

This specification is approved for use by the U.S. Army Armament, Research, Development and Engineering Center (ARDEC) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Positioner, Mirror, Azimuth, PN 11747020 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these document are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specifications Governing the Manufacture and Inspection of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use to improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: AMSTA-AR-EDE-S, Picatinny Arsenal, New Jersey 07806-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4931

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

MIL-I-45607 - Inspection Equipment; Acquisition Maintenance, and Disposition of

STANDARDS

MILITARY

MIL-STD-100 - Engineering Drawing Practices
MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts
MIL-STD-454 - Standard General Requirements for Electronic Equipment
MIL-STD-810 - Environmental Test Methods
MIL-STD-2000 - Standard Requirements for Soldered Electrical and Electronic Assemblies
MIL-STD-2073-1 - Procedures for Development and Application of Packaging Requirements

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: DODSSP - Customer Service, Standardization Documents Order Desk, 700 Robbins Avenue, Bldg 4D, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. Army Armament Research Development and Engineering Center (ARDEC)

DRAWINGS

11747020 Positioner, Mirror, Azimuth
PS11747020 Packaging of Mirror Positioner, Azimuth

(Copies of Government drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained (See contract provisions for additional precedence criteria).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The Positioner, Mirror Azimuth herein referred to as the assembly, shall be manufactured in accordance with Drawing 11747020 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification.

3.1.1 General Specifications. (see 4.6.3)

3.1.1.1 Manufacture and inspection. The following provisions of MIL-F-13926 apply:

a. Dimensions and tolerances
b. Effect of protective coating on dimensions (Inorganic type coatings)
c. Part identification and marking
d. Workmanship (Including applicable portions of MIL-STD-2000 and MIL-STD-454, Requirement 9)

3.1.1.2 Standards of manufacture.

3.1.1.2.1 Assembly and soldering. The requirements of MIL-STD-2000 shall apply, as a minimum.

3.1.1.2.2 Interchangeability. The assembly shall be manufactured in accordance with interchangeability requirements as specified in MIL-STD-100.

3.1.2 Ambient conditions. Standard ambient conditions shall be as follows:

a.	Temperature	$73^{o} \pm 18^{o}F$
b.	Relative Humidity	50 percent $\pm$ 30 percent
c.	Atmospheric pressure	28.5 + 2.0 -3.0 in. Hg.

3.1.3 First article. When specified in the contract or purchase order (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4).

3.2 Performance. Unless otherwise specified, the assembly shall meet the performance requirements herein under standard ambient conditions of 3.1.2 and the loads and power inputs of Table I.

3.2.1 AC REF and 115 volts ac. With the loads and power source applied as specified in Table I, the following voltages shall be present at the pins specified:

a. AC REF 1 = 5.0 $\pm$ 0.1V rms between connector pins J1-B and J1-C (return).

b. AC REF 2 = 5.0 $\pm$ 0.1V rms between connector pins J1-A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

b. AC REF 2 = 5.0 ± 0.1V rms between connector pins J1-A and J1-C.

c. 115V ac = 115 + 15/-20V rms, 400 ± 20 Hz between pins J-1T and J1-U (return).

3.2.2 Circuit continuity. With no power applied, direct continuity (resistance equal to or less than 1.0 ohm), shall exist between the test jacks and connector pins specified in Table II.

3.2.3 Switching continuity. With no power applied, direct continuity (resistance equal to or less than 1.0 ohm), or an open circuit (resistance equal to or greater than 1.0 megohm) shall exist between connector pins as specified in Table III.

3.2.4 Plus and minus 15 volts direct current (V dc). With 28V dc and the loads applied as specified in Table I, the following voltages shall be present:

a. 15.0 ± 1.5V dc, ripple 200mV p-p maximum between connector pins J1-F and J1-C (return).

b. -15.0 ± 1.5V dc, ripple 200mV p-p maximum between connector pins J1-G and J1-C (return).

3.2.5 Motor drive voltage adjustment. With 28V dc and the loads applied as specified in Table I, the DEFLECTION switch set to the LEFT or RIGHT position and with DEFLECTION RATE control rotated in the clockwise direction, the motor drive signal between connector pins J1-R and J1-S shall increase to 26.0 ± 5.0V rms. The voltage shall be less than 2V rms with the DEFLECTION control in the OFF position.

3.2.6 Motor drive voltage phase. With 28V dc and the loads applied as specified in Table I, the DEFLECTION switch set to the RIGHT position, the phase of the motor drive voltage between connector pins J1-R and J1-U (return) shall be in phase with the 115V ac voltage between connector pins J1-T and J1-U (return).

3.2.7 Insulation resistance. All insulation between ungrounded circuits and ground, and between isolated circuits shall have a minimum resistance of 10 megohms with 500V dc applied.

3.2.8 Dielectric strength. There shall be no puncture of insulation, no sparkover, or decrease in dielectric strength when the insulated areas of the assembly are subjected to an ac rms potential of 200 volts at a frequency of 60 Hz for a period of not more than 30 seconds nor less than 5 seconds.

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:56Z
Check the source to verify that this is the currentversion before use.

TABLE I. Loads and Power.

Item	Conditions	Characteristics	Connections
1	Loads		"Connected between the following pins"
1.1	Resistor	1.3 kilohms, 1/4 watt, ± 5 percent	J1-A and J1-C
1.2	Resistor	1.0 kilohm, 1/4 watt, ± 5 percent	J1-B and J1-C
1.3	Resistor	750 ohms, 1/2 watt, ± 5 percent	J1-F and J1-C
1.4	Resistor	750 ohms, 1/2 watt, ± 5 percent	J1-G and J1-C
1.5	Resistor	180 ohms, 5 watts, ± 5 percent	J1-R and J1-S
1.6	Resistor	3.3 kilohm, 5 watts, ± 5 percent	J1-T and J1-U
2.	Power source		
2.1	28V	Tolerance: ± 1.0V Ripple: ≤25mV p-p	Unless otherwise specified applied between J2-A (+) and J2-B (-)

TABLE II. Circuit continuity

Item	Test Jacks	Connector	Selection Switch S-4 Position
1	J3 (SELECT SWITCH(AC))	J1-V	24V Motor(ct)
2	J3 (SELECT SWITCH(AC))	J1-P	Laser Feedback
3	J3 (SELECT SWITCH(AC))	J1-M	Tach
4	J3 (SELECT SWITCH(AC))	J1-J	Analog Range
5	J4 (COMMON)	J1-K	
6	Shield for wires that connect to J1-K, J1-M, and J1-P	J1-N	
7	J5 (BTL RNG LOGIC(DC))	J1-W	
8	J6 (AC REF 1)	J1-B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

TABLE III. Switching continuity.

Item	Built in Test NORMAL Switch Position	Continuity (_1.0 ohm)	Open Circuit (_1.0 megohm)
1	Built in test	J1-E to J1-C J1-E to J1-D	-- --
2	Normal	-- --	J1-E to J1-C J1-E to J1-D

3.3 Environmental conditions.

3.3.1 Temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of +40°F to 100°F and shall not be damaged when subjected to the storage conditions ranging from -65°F to 160°F (see 4.6.2.1 and 4.6.2.2).

3.3.2 Vibration. The assembly shall be capable of operating as specified herein after withstanding exposure under the conditions of 3.1.2 to a sinusoidal vibration displacement of .06 inch double amplitude, 10 - 55 Hz in accordance with Figure 1. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes (see 4.6.2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.


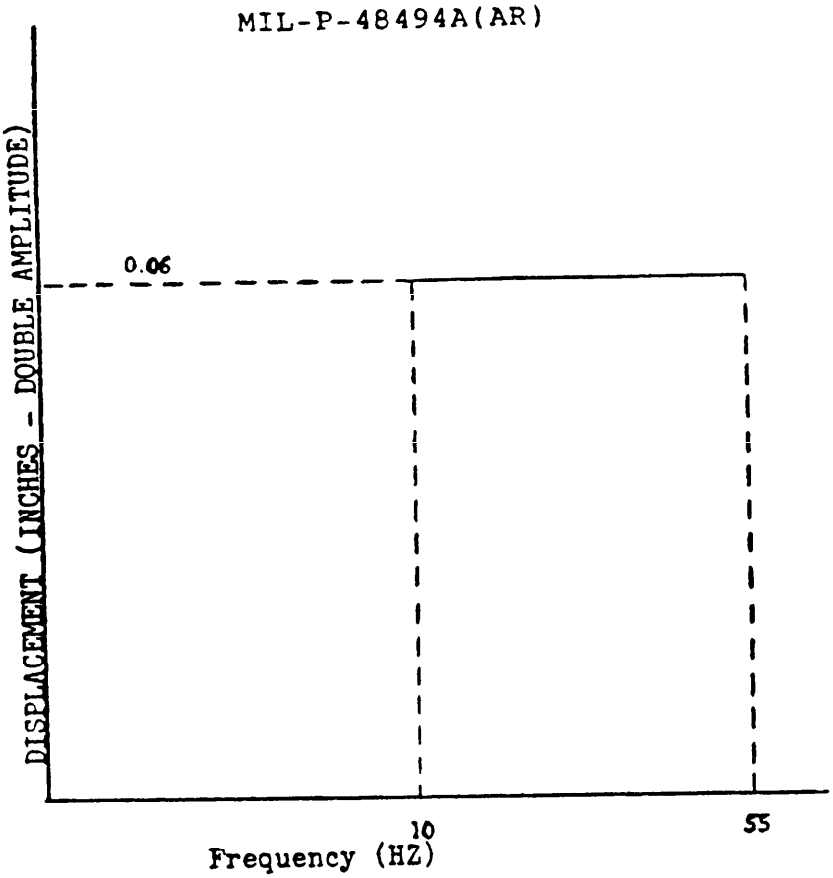


FIGURE 1. Vibration Curve.

3.3.3 Shock. The assembly shall be capable of operating as specified herein after withstanding exposure under the conditions of 3.1.2 to half sine wave shock pulses of 40 ± 4 gravity units (g's) for a duration of 18 ± 3 milliseconds (msec) in accordance with Figure 2. The assembly shall withstand three shock pulses applied in both directions along three mutually perpendicular axes (18 shocks). In addition, the assembly shall be capable of withstanding three half sine wave shock pulses of 100.0 ± 10.0 g's for a duration of 1.5 ± 0.2 msec applied in each direction along three mutually perpendicular axes (see 4.6.2.4).

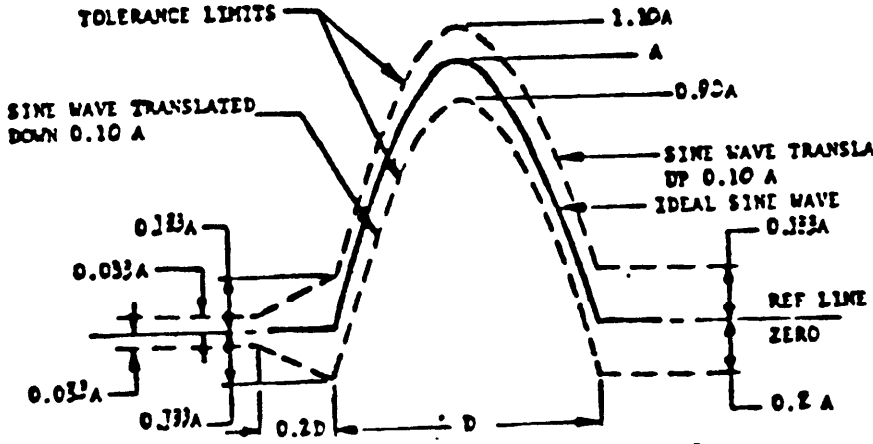

A = 40 g's
D = 18 msec

A = 100 g's
D = 1.5 msec

FIGURE 2. Shock Pulse.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:56Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature cycling. The assembly shall be capable of operating as specified herein after withstanding exposure to temperature cycling and soaking between the temperatures of -25°F and 140°F in accordance with Figure 3 (See 4.6.2.5).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspections, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and by standard commercial practice. Contractor inspection equipment designs shall be submitted for Government approval as specified in the contract (see 6.5).

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5 and 6.8).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.2.

4.4 First article inspection. The requirement for first article approval and the designation of responsibility for first

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

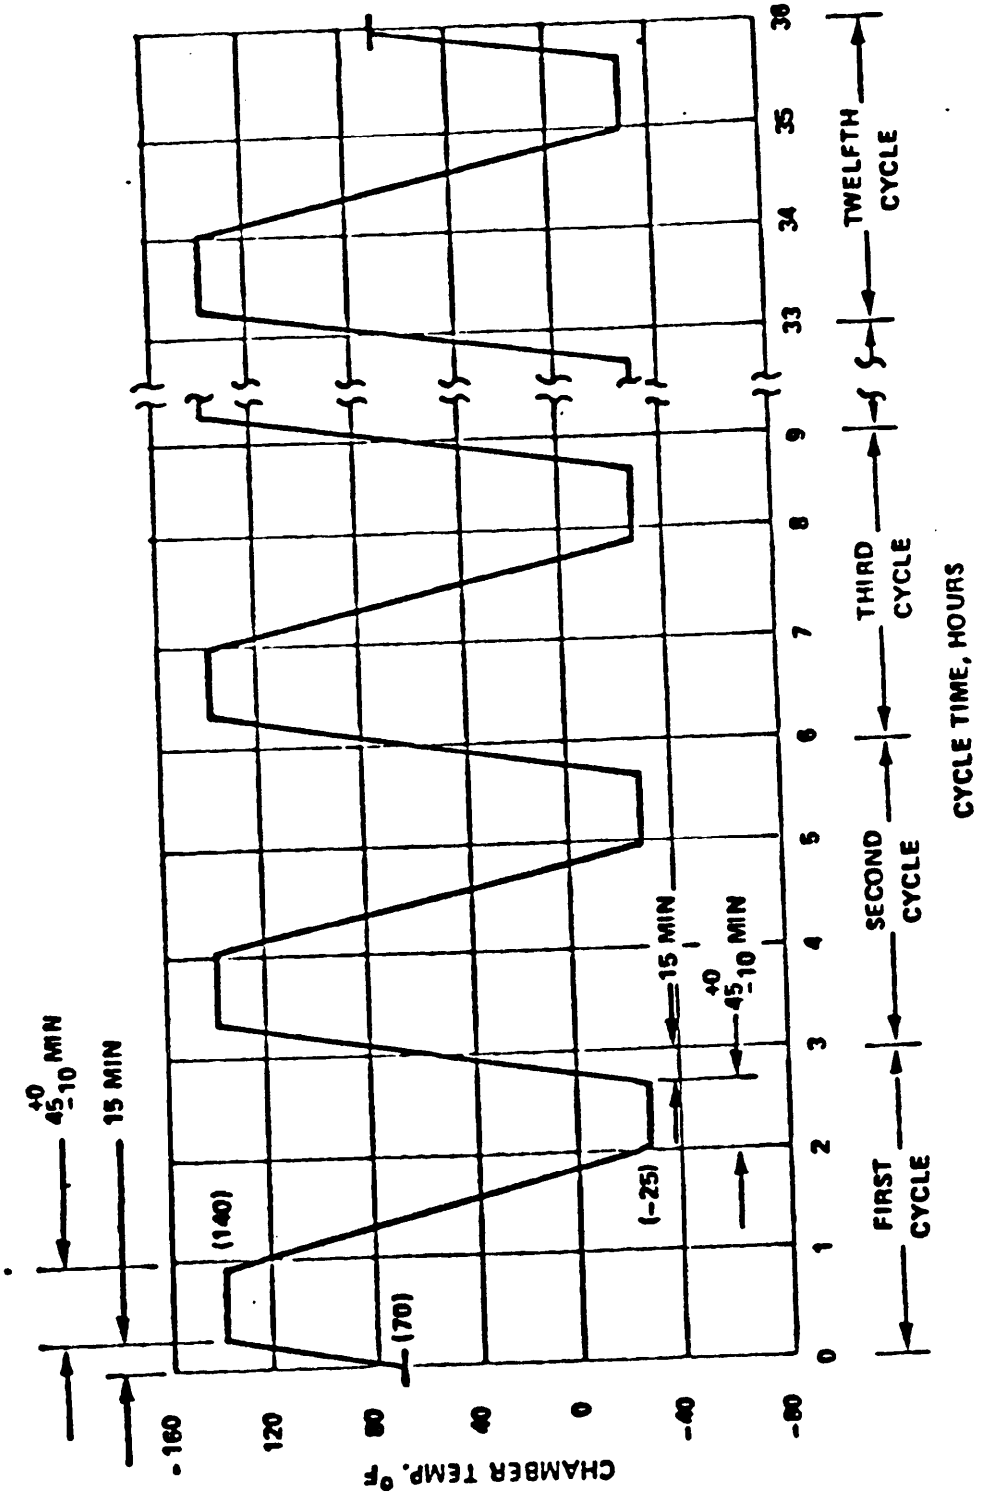


FIGURE 3. Temperature Cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

article inspection to either the Government or the contractor shall be specified in the contract (see 6.3).

4.4.1 Sample. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.4.2. The first article sample shall consist of two assemblies.

4.4.2 Inspections to be performed. Two assemblies shall be subjected to all inspections specified in Tables IV, V and VI. Tests 301 and 302 of Table VI shall be performed first.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

4.5 Quality conformance inspection.

4.5.1 Performance tests. The tests of Table IV shall be conducted on each assembly of the inspection lot. Any assembly that fails to meet any specified requirement shall be rejected. Rejected assemblies may be repaired or corrected and resubmitted to this series of tests.

4.5.2 General and environmental tests.

4.5.2.1 General sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 produced and shall be subjected to all the tests in Table VI. Examine each for completeness, improper assembly and evidence of poor workmanship per 301 and 302.

4.5.2.2 Environmental sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in Table V shall be applied separately to the assembly.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be resubmitted for reinspection only after all assemblies are re-examined or retested and all defective assemblies are removed or defects corrected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Performance tests.

Item	Characteristic	Requirement	Test Procedure
101	AC Ref. - 115V ac	3.2.1	4.6.1.1
102	Circuit continuity	3.2.2	4.6.1.2
103	Switching continuity	3.2.3	4.6.1.3
104	± 15 volts direct current	3.2.4	4.6.1.4
105	Motor drive voltage adjustment	3.2.5	4.6.1.5
106	Motor drive voltage phase	3.2.6	4.6.1.6
107	Insulation resistance	3.2.7	4.6.1.7
108	Dielectric strength	3.2.8	4.6.1.8

TABLE V. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
201	Temperature	3.3.1	4.6.2.1/4.6.2.2
202	Vibration	3.3.2	4.6.2.3
203	Shock	3.3.3	4.6.2.4
204	Temperature cycling	3.3.4	4.6.2.5

TABLE VI. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General Specification	3.1.1	4.6.3 - Visual
303	Packaging Inspection	5.1	4.6.4 - Visual

4.6 Methods of inspection.

4.6.1 Performance.

4.6.1.1 AC REF and 115 volts ac. Measure and verify the following output voltages:

a. 5.0 ± 0.1V rms between J1-B and J1-C.
b. 5.0 ± 0.1V rms between J1-A and J1-C.
c. 115 +15/-20V rms, 400 ± 20 Hz between J1-T and J1-U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.6.1.2 Circuit continuity. With no power applied, measure the resistance between the test jacks and associated connector pins as specified in Table II. Verify that the resistance is equal to or less than 1.0 ohm.

4.6.1.3 Switching continuity. With no power applied and with the Built-in Test/Normal switch in the Built-in-Test position, measure and record the resistance between pins J1-E and J1-C, and between pins J1-E and J1-D. Repeat with the switch in the normal position. Verify that the resistance is less than or equal to 1.0 ohm while the switch is in the Built-in Test position and not less than 1.0 megohms while in the normal position.

4.6.1.4 Plus and minus 15 volts dc. Measure and record the output voltages between pins J1-F and J1-C, and between pins J1-G and J1-C. Verify that the output voltages are 15.0 $\pm$ 1.5V dc and -15.0 $\pm$ 1.5V dc, respectively, with a maximum ripple of 200mV peak to peak for each.

4.6.1.5 Motor drive voltage adjustment. Measure and record the voltage between connector pins J1-R and J1-S with the DEFLECTION switch set to the LEFT position while rotating the DEFLECTION RATE control in the clockwise direction. Repeat with the DEFLECTION switch set to the RIGHT position. Verify that the motor drive signal increases to 26.0 $\pm$ 5.0V rms. Set the DEFLECTION control to the OFF position and verify that the motor drive signal is less than 2V rms.

4.6.1.6 Motor drive voltage phase. Observe the phase of the motor drive voltage between connector pins J1-R and J1-U relative to the phase of the 115V ac voltage between connector pins J1-T and J1-U with DEFLECTION switch set to the RIGHT position. Verify that the voltages are in phase.

4.6.1.7 Insulation resistance. Measure the insulation resistance between pins of connector J1 and case in accordance with MIL-STD-202, Method 301, Test Condition B. Verify that the resistance is not less than 10 megohms.

4.6.1.8 Dielectric Strength. Perform a dielectric strength test between pin J2-B and case in accordance with MIL-STD-202, Method 301, using 200V rms at a frequency of 60 Hz for a period of 20.0 $\pm$ 5.0 seconds. During this test, verify that the assembly shows no puncture of solid insulation, no continuing sparkover, and nor breakdown of dielectric materials.

4.6.2 Environmental tests.

4.6.2.1 High temperature. Subject the assembly to the high temperature test specified in MIL-STD-810, Method 501 except storage temperature shall be 160°F for 48 hours. At the conclusion of the storage temperature test, stabilize the assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

at 100°F and subject it to the performance tests of Table IV. After testing, return the assembly to room temperature and subject it to the performance tests of Table IV.

4.6.2.2 Low temperature. Subject the assembly to the low temperature test specified in MIL-STD-810, Method 502. Maintain the temperature at -65°F for a period of 12 hours minimum. At the conclusion of the storage temperature test, stabilize the assembly at 40°F and subject it to the performance tests of Table IV. After testing, return the assembly to room temperature and subject the assembly to the performance tests of Table IV.

4.6.2.3 Vibration. Vibration A as specified in 4.7.3.1 shall be conducted only for first article inspection. Vibration B as specified in 4.7.3.2 shall be conducted only for quality conformance inspection.

4.6.2.3.1 Vibration A. Mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810, Method 514, General Procedures, and 3.4.2. The vibration amplitude shall have a tolerance of ± 10%. The tolerance of the vibration frequency shall be ± 2%, or 1/2 Hz for frequencies below 25 Hz. Vibration sweeps shall be conducted with the duration of exposure not less than 80 minutes in each of three mutually perpendicular axes. At the conclusion of this test, subject the assembly to the performance tests of Table IV.

4.6.2.3.2 Vibration B. This test shall be conducted as in 4.7.3.1 except that the period of vibration shall be not less than 15 minutes in each axis.

4.6.2.4 Shock. Mount the assembly in a suitable shock fixture and subject it to the functional shock test for ground equipment specified in MIL-STD-810, Method 516, for a total of three half sine wave shock pulses in both directions along three mutually perpendicular axes (18 shocks). Peak amplitude shall be 40 ± 4 g's with a time duration of 18 ± 3 msec in accordance with Figure 2. At the conclusion of this test, subject the assembly to the performance tests of Table IV. Repeat this test with peak amplitude of 100.0 ± 10.0 g's with a time duration of 1.5 ± 0.2 msec in accordance with Figure 2.

4.6.2.5 Temperature cycling. With power and loads of Table I applied, subject the assembly to the temperature profile specified in Figure 3. At the conclusion of this test, subject the assembly to the performance tests of Table IV.

4.6.3 General specifications. Verification of precedence or inspections (including workmanship) required shall be performed by examination, visually or through the use of standard measuring equipment, in accordance with 3.1.1.

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:56Z
Check the source to verify that this is the current version before use.

4.6.4 Packaging Inspection. The sampling and inspection of the preservation, packaging, packing and container marking shall be in accordance with MIL-STD-2073-1.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet PS11747020. The level of protection shall be as specified in the procurement document (see 4.6.4, 6.2d and 6.7).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The Positioner, Mirror, Azimuth, herein referred to as the assembly, provides the drive signals and operating voltages required to position the R/T unit azimuth mirror assembly when the LRF system is operated without the XM21 computer system.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of the specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

c. Inspection provisions for first article (see 6.3).

d. Applicable levels of preservation, packaging, packing and container marking (see 5.1 and 6.7).

6.3 First article. The contracting officer should provide specific guidance to offerors for the submission of a first article sample to be tested as specified in 4.4.2. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-01-28T03:50Z
Check the source to verify that this is the current version before use.

6.4 Supersession. Previous revisions of MIL-P-48494(AR) were for the U.S. Army Armament, Research, Development and Engineering Center's internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

6.5 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, Attn: AMSTA-AR-QAC-F, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.6 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

6.7 Levels of packaging. The following definitions describe the three levels of packaging in accordance with MIL-STD-2073-1.

a. Level A - Adequate protection for indeterminate storage and worldwide distribution.

b. Level B - Adequate protection for known shipment conditions and storage conditions normally not exceeding one year.

c. Level C - Adequate protection for shipment to a known site for immediate use.

6.8 Alternative quality conformance provisions. Alternative quality conformance procedures, methods, or equivalent, such as statistical process control, tool control, other types of sampling procedures, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation. When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality assurance provision(s) herein. In cases of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable. Unless otherwise specified in the contract, proposed alternative quality conformance provisions will be submitted by the contractor for evaluation by the Government technical activity.

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:56Z
Check the source to verify that this is the current version before use.

6.9 Subject term (key word) listing.

Fire Control
Motor Drive
Tank, M60A3

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 4931-A185)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current( )S))AS(()(S))S (AT:S))S any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-48494A (AR)	950501

3. DOCUMENT TITLE
MIRROR POSITIONER, AZIMUTH

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

7. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial 201-724-6629	(2) AUTOVON DSN-880-6629
c. ADDRESS (Include Zip Code) ATTN: AMSTA-AR-EDE-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.