MIL-W-48271A(AR)
3 AUGUST 1984
SUPERSEDING
MIL-W-48271(PA)
31 May 1974

MILITARY SPECIFICATION

WARHEAD METAL PARTS ASSEMBLY M251 PARTS AND ASSEMBLING

This specification is approved for use by the US Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the quality assurance provisions and special requirements not covered by the drawings for the fabrication of parts for and assembling of the metal parts assembly M251.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids or request for proposals form a part of this specification to the extent specified herein.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-B-6812	-	Bolt, Aircraft
MIL-I-6866	-	Inspection, Penetrant Method of
MIL-I-6868	-	Inspection Process, Magnetic Particle

FSC: 1340

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn. DRSMC-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the current version before use.

MIL-S-7742 - Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-W-8604 - Welding, Fusion, Aluminum Alloys, Process and Performance of
MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for

FEDERAL

QQ-P-416 - Plating, Cadium (Electrodeposited)

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-00453 - Inspection, Radiographic
MIL-STD-1168 - Lot Numbering of Ammunition
MIL-STD-1595 - Qualification of Aircraft, Missile and Aerospace Fusion Welders

DRAWINGS

US ARMY ARMAMENT, RESEARCH AND DEVELOPMENT CENTER (ARDC)

9283999 - Metal Parts Assembly M251
9211190 - Pkg and Mkg for Warhd Sect., GM, HE: M251: Prac: XM198E1; Tng: M201

US ARMY MISSILE COMMAND

11430220 - Gage Assembly, Acceptance Warhead Interface, M.S. 100.00
11430988 - Instruction Tag, Warhead Gage for Missile Interface

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

ASTM-B 117-73 - Method of Salt Spray (Fog) Testing
ASTM-E 8-69 - Tension Testing of Metallic Material
ASTM-E 18-67 - Tests for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials
ASTM-B 633 - Zinc on Iron and Steel, Electrodeposited Coatings of

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material. Materials used in assembling, marking, and packing of the warhead shall be in accordance with all applicable drawings and specifications.

3.2 Components and assemblies. Components and assemblies shall comply with all requirements specified on drawing F9283999 and associated drawings, and with all requirements specified in applicable specifications and standards.

3.3 Mechanical properties. Cold-working or heat-treating (including quenching-and-tempering, normalizing, normalizing-and-tempering, annealing, and stress-relieving) operations, shall be performed in such a manner as to produce the specified properties uniformly throughout the entire lot. The contractor shall determine the detailed procedures to produce parts meeting the required mechanical properties. These procedures shall be documented and submitted with the first article sample to the Contracting Officer. Changes in these procedures shall also be documented and submitted to the Contracting Officer.

3.4 Welding. All skin welds shall be reasonably smooth and free of craters. They shall exhibit characteristics of good fusion, penetration and soundness of deposit representative of good welding practice. The process shall be such as to prevent warpage beyond dimensional requirements.

3.4.1 Qualification of welders and welding equipment. Only welders qualified in accordance with Specification MIL-STD-1595 shall be permitted to weld aluminum components. A complete qualification test for each welder or welding operator in making warhead skins shall consist of making a butt weld qualification test coupon in accordance with Specification MIL-STD-1595. The test coupon shall be of the same type and grade of material and the same thickness to be used in making the longitudinal seam of the warhead skins. The test coupons must satisfactorily pass the test specified in Specification MIL-STD-1595. Welding equipment shall be qualified in accordance with MIL-W-8604.

3.4.2 Material sag. Sag of material in the area adjacent to the weld shall not be more than .010 below the surface of the joined part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the currentversion before use.

3.4.3 Penetrant examination. Cracks and porous areas shall not exceed 1/2 inch in length in each one inch length. The total length of all cracks and porous areas shall not be more than 2 inches in any skin section. Penetrant examination shall be used to inspect for these defects.

3.4.4 Blow-outs. Blowouts may be repaired and hand welded provided they do not exceed 1/4 inch in width and 1 inch in length. No more than 3 such areas may be repaired in any skin section.

3.4.5 Mechanical properties. The tensile strength of aluminum welds shall not be less than 30,000 pounds per square inch, the yield strength shall not be less than 25,000 pounds per square inch, and the elongation shall not be less than five (5) percent.

3.5 Mechanical properties of component parts. The aluminum used in fabrication of the components shall comply with the minimum requirements specified in the applicable specification for the heat treatment conditions required.

3.6 Pull test of explosive assemblies. After the pull test, the gap requirements of the applicable drawings shall be met when the assemblies are radiographically examined.

3.7 Functioning of nose assembly. The nose assembly when disengaged, shall be capable of being moved forward and rotated as required on Drawing 9283999 and returned to the original position and be securely re-engaged without any motion stoppage due to interference between parts.

3.8 Spring embrittlement. Springs which have been treated for embrittlement relief shall show no visual evidence of cracks and shall not break when pulled to the minimum point of permanent distortion.

3.9 Serialization. Each consecutively produced warhead shall be serially numbered in accordance with MIL-STD-1168. A block of numbers for this purpose shall be furnished by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the current version before use.

3.10 First article testing. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.11 Functioning of center ring test assembly. The center ring test assembly after functioning, shall be examined for proper cutting as evidenced by severing of the forward and aft skin sections and the center ring section. This requirement shall apply at ambient, $-25^{\circ}F + 5^{\circ}$ and $140^{\circ}F - 5^{\circ}$.

3.12 Static detonation of warhead. The warhead, when functioned at ambient temperature, shall evidence proper skin cutting (forward to aft and circumferentially) and center ring cutting as determined by analysis of film coverage and recovered hardware. In addition, all explosive elements in the warhead shall be consumed during functioning.

3.13 Workmanship. All parts and assemblies shall be fabricated and finished in a thorough, workmanlike manner. They shall be free of burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, corrosion products, and other foreign matter. The cleaning method used shall not be injurious to any parts, nor shall the parts be contaminated by the cleaning agents. All marking and stamping shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspections and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of the detail specification.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item:

a. First Article Inspection

b. Quality Conformance Inspection

4.3 First article inspection

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

Part Description	Drawings	Quantity
Washer	8831171	4
Pin, Lever	8831277	4
Spring, latch	8831279	9
Rivet, Shoulder	8833389	4
Spring, clevis	8836202	9
Pin, alignment	8877425	4
Pin, shear	8877426	12
Spring, torsion	9208238	9
Plunger, spring	9208288	8
Clevis	9208290	4
Skin, nose	9208291	1
Nut, adjust	9208303	4
Lever, latch	9208320	4
Latch assembly	9208333	2
End primer	9208361	10
Double end primer assembly	9208362-1	2
Double end primer assembly	9208362-2	2
Single end primer assembly	9208363-1	2
Single end primer assembly	9208363-2	2
Cable assembly	9208657	2
Spring, pushbutton	9208662-1	5
Spring, pushbutton	9208662-2	5
Detonating cord booster	9208663	10
Pin, spring	9208681	4
Lever, locking	9208690	4
Latch, base assembly	9208708	4
Hook, latch	9208758	4
Arm, hook	9208759	4
Booster assembly	9208777	10
Cover, booster	9208778	10
Container, booster	9208779	10
Nut, external wrenching	9237309	8
Bolt, tee	9237322	8
Forward shield assembly no. 1	9247983	2
Forward shield assembly no. 2	9247984	2
Aft shield assembly	9247985	2
Detonating cord and booster assembly	9247986	2
Wedge	9247988	2
Filler, ring	9247992	2
Filler, side	9247996	2
Collar, divider	9248003	1
FLSC (100 grain)	9253547-1	2 feet
FLSC (20 grain)	9253547-2	5 feet
MDF (12 grains per foot)	9253558	5 feet
Seal, aft section	9267740	1
Cone	9269668	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

Part Description	Drawings	Quantity
Skin	9269670	1
Bolt	9283962	2
Spacer	9283963	1
Center ring assembly	9283964	1
Center ring test assembly	9283964 (Modified per 4.5.16)	10
Explosive, flexible	9283966	6
Skin, forward	9283967	1
Skin, aft	9283968	1
Ring, fuze	9283969	1
Ring, aft	9283970	1
Ring, center	9283971	1
Tube	9283972	1
Collar	9283973	1
Plug, aft	9283974	1
Shield, MDF	9283976	1
MDF and primer assembly	9283981	1
Nut, clinch	9283989-1	4
Nut, clinch	9283989-2	4
Aft ring assembly	9283991	1
Collar and divider assembly	9283997	1
Metal Parts Assembly M251 (unpainted)	9283999	1
Metal Parts Assembly M251	9283999	1
Latch assembly	9308333	2
Set screw	9313681	1
Cap screw	MS16998-59	1
Nut	MS21083-N5	4
Washer	MS27183-7	4

4.3.2 Inspections to be performed. The first article parts submitted in accordance with paragraph 4.3.1 will be subjected by the Government to any or all the requirements of the applicable drawings and to the inspections of Table I. All inspections listed in Table I shall be classified Major unless otherwise specified.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Metal parts assembly M251 (unpainted) (Dwg. 9283999)				
	Examination for defects	1		3.2	4.4.2.50
	Metal parts assembly M251 (Dwg. 9283999)				
	Examination for defects	1(a)		3.2	4.4.2.51
	Static Detonation of Warhead	1		3.13	4.5.18
	Ring, fuze; (Dwg. 9283969)				
	Examination for defects	1		3.2	4.4.2.1
	Skin, nose (Dwg. 9208291)				
	Examination for defects	1		3.2	4.4.2.2
	Examination of mechanical properties of skin	2(b)		3.5	4.5.2
	Examination of tensile properties of welds	4(c)		3.4.5	4.5.3

NOTES:

(a) This sample may be used for static detonation testing per 4.5.18 after passing examination for defects 4.4.2.51.
(b) Samples cut from part.
(c) Samples cut from part transverse of welded joint.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Latch assembly (Dwg. 9208333)				
	Examination for defects	2		3.2	4.4.2.3
	Skin, forward (Dwg. 9283967)				
	Examination for defects	1		3.2	4.4.2.4
	Examination of mechanical properties of skin	2(b)		3.5	4.5.2
	Examination of tensile properties of weld	4(c)		3.4.5	4.5.3
	Ring, center (Dwg. 9283971)				
	Examination for defects	1		3.2	4.4.2.5
	Center ring assembly (Dwg. 9283964)				
	Examination for defects	1(a)		3.2	4.4.2.6

NOTES:

(a) This sample may be used for explosive functioning testing per 4.5.16 after passing examination for defects 4.4.2.6.

(b) Samples cut from part.

(c) Samples cut from part transverse of welded joint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 3 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Skin, aft (Dwg. 9283968)				
	Examination for defects	1		3.2	4.4.2.7
	Examination of mechanical properties of skin	2(b)		3.5	4.5.2
	Examination of tensile properties of welds	4(a)		3.4.5	4.5.3
	Ring, aft (Dwg. 9283970)				
	Examination for defects	1		3.2	4.4.2.8
	Aft ring assembly (Dwg. 9283991)				
	Examination for defects	1		3.2	4.4.2.9
	Bolt, tee (Dwg. 9237322)				
	Examination for defects	8		3.2	4.4.2.10

NOTES:
(a) Samples cut from part transverse of welded joint.
(b) Samples cut from part.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 4 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Nut, external wrenching (Dwg. 9237309) Examination for defects	8		3.2	4.4.2.11
	Pin, alignment (Dwg. 8877425) Examination for defects	4		3.2	4.4.2.12
	Pin, shear (Dwg. 8877426) Examination for defects	12		3.2	4.4.2.13
	Plunger, spring (Dwg. 9208288) Examination for defects	8		3.2	4.4.2.14
	Spring, pushbutton (Dwg. 9208662-1) Examination for defects	5		3.2	4.4.2.15
	Spring, pushbutton (Dwg. 9208662-2) Examination for defects	5		3.2	4.4.2.16

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 5 OF 13	DRAWING NUMBER See Below
				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH / PARAGRAPH REFERENCE / INSPECTION METHOD
	Spring, latch (Dwg. 8831279)			
	Examination for defects	5		3.2 / 4.4.2.17
	Salt spray	4		3.2 / 4.5.17/4.4.3.2
	Spring, torsion (Dwg. 9208238)			
	Examination for defects	5		3.2 / 4.4.2.18
	Salt spray	4		3.2 / 4.5.17/4.4.3.2
	Spring, clevis (Dwg. 8836202)			
	Examination for defects	5		3.2 / 4.4.2.19
	Salt spray	4		3.2 / 4.5.17/4.4.3.2
	Explosive, flexible (Dwg. 9283966)			
	Examination for defects	6		3.2 / 4.4.2.20
	End primer (Dwg. 9208361)			
	Examination for defects	10		3.2 / 4.4.2.21

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 6 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	MDF (12 grains per foot) (Dwg. 9253558) Examination for defects	25(a)		3.2	4.4.2.22
	Booster assembly (Dwg. 9208777) Examination for defects	10		3.2	4.4.2.23
	FLSC (100 grain) (Dwg. 9253547-1) Examination for defects	10(b)		3.2	4.4.2.24
	FLSC (20 grain) (Dwg. 9253547-2) Examination for defects	25(a)		3.2	4.4.2.25
	Detonating cord booster (Dwg. 9208663) Examination for defects	10		3.2	4.4.2.26

NOTES:
(a) Number of non-destructive inspections on five (5) foot sample - use one (1) foot for detonation velocity test.
(b) Number of non-destructive inspections on two (2) foot sample - use one (1) foot for detonation velocity test.

DRDAR-QA Form 160a, 1 Jun 83

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 7 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Detonating cord and booster assembly (Dwg. 9247986) Examination for defects	2		3.2	4.4.2.27
	Double end primer assembly (Dwg. 9208362-1) Examination for defects	2		3.2	4.4.2.28
	Double end primer assembly (Dwg. 9208362-2) Examination for defects	2		3.2	4.4.2.29
	Single end primer assembly (Dwg. 9208363-1) Examination for defects	2		3.2	4.4.2.30
	Single end primer assembly (Dwg. 9208363-2) Examination for defects	2		3.2	4.4.2.31
	MDF end primer assembly (Dwg. 9283981) Examination for defects	1		3.2	4.4.2.32
	Container, booster (Dwg. 9208779) Examination for defects	10		3.2	4.4.2.33

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 8 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Cover, booster (Dwg. 9208778) Examination for defects	10		3.2	4.4.2.34
	Forward shield assembly no. 1 (Dwg. 9247983) Examination for defects	2		3.2	4.4.2.35
	Forward shield assembly no. 2 (Dwg. 9247984) Examination for defects	2		3.2	4.4.2.36
	Aft shield assembly (Dwg. 9247985) Examination for defects	2		3.2	4.4.2.37
	Collar (Dwg. 9283973) Examination for defects	1		3.2	4.4.2.56
	Collar, divider (Dwg. 9248003) Examination for defects	1		3.2	4.4.2.57
	Collar and divider assembly (Dwg. 9283997) Examination for defects	1		3.2	4.4.2.58
NOTES:					

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 9 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Tube (Dwg. 9283972) Examination for defects	1		3.2	4.4.2.38
	Plug, aft (Dwg. 9283974) Examination for defects	1		3.2	4.4.2.39
	Cone (Dwg. 9269668) Examination for defects	1		3.2	4.4.2.40
	Filler, side (Dwg. 9247996) Examination for defects	2		3.2	4.4.2.41
	Filler, ring (Dwg. 9247992) Examination for defects	2		3.2	4.4.2.42
	Wedge (Dwg. 9247988) Examination for defects	2		3.2	4.4.2.43
	Skin (Dwg. 9269670) Examination for defects	1		3.2	4.4.2.44

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 10 OF 13	DRAWING NUMBER See Below
				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH / PARAGRAPH REFERENCE /INSPECTION METHOD
	Spacer (Dwg. 9283963) Examination for defects	1		3.2 / 4.4.2.45
	Shield, MDF (Dwg. 9283976) Examination for defects	1		3.2 / 4.4.2.46
	Bolt (Dwg. 9283962) Examination for defects	2		3.2 / 4.4.2.47
	Cable Assembly, M251 (Dwg. 9208657) Examination for defects	2		3.2 / 4.4.2.48
	Seal, aft section (Dwg. 9267740) Examination for defects	1		3.2 / 4.4.2.49
	Center ring test assembly (Dwg. 9283964 modified per 4.5.16) Examination for defects/functioning test	10		3.12 / 4.5.16

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 11 OF 13		DRAWING NUMBER See Below NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Set screw (Dwg. 9313681) Examination for defects	1		3.2	4.4.2.55
	Cap screw (MS16998-59) Examination for defects	1		3.2	4.4.2.59
	Nut (MS21083-N5) Salt spray	4		3.2	4.5.17/4.4.3.2
	Washer (MS27183-7) Salt spray	4		3.2	4.5.17/4.4.3.2
	Washer (Dwg. 8831171) Salt spray	4		3.2	4.5.17/4.4.3.2
	Pin, lever (Dwg. 8831277) Salt spray	4		3.2	4.5.17/4.4.3.2

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 12 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Rivet, shoulder (Dwg. 8833389) Salt spray	4		3.2	4.5.17/4.4.3.2
	Clevis (Dwg. 9208290) Salt spray	4		3.2	4.5.17/4.4.3.2
	Nut, adjust (Dwg. 9208303) Salt spray	4		3.2	4.5.17/4.4.3.2
	Lever, latch (Dwg. 9208320) Salt spray	4		3.2	4.5.17/4.4.3.2
	Pin, spring (Dwg. 9208681) Salt spray	4		3.2	4.5.17/4.4.3.2
	Lever, locking (Dwg. 9208690) Salt spray	4		3.2	4.5.17/4.4.3.2

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - First Article Inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 13 OF 13		DRAWING NUMBER See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Latch base assembly (Dwg. 9208708) Salt spray	4		3.2	4.5.17/4.4.3.2
	Hook, latch (Dwg. 9208758) Salt spray	4		3.2	4.5.17/4.4.3.2
	Arm, hook (Dwg. 9208759) Salt spray	4		3.2	4.5.17/4.4.3.2
	Nut, clinch (Dwg. 9283989-1) Salt spray	4		3.2	4.5.17/4.4.3.2
	Nut, clinch (Dwg. 9283989-2) Salt spray	4		3.2	4.5.17/4.4.3.2

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of warheads shall contain: Explosive components with the same interfix number from one manufacturer.

4.4.2 Examination. See MIL-A-48078.

4.4.2.1 Sampling plans. Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans for Major and Minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Ring, Fuze	1 OF 3	9283969
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Diameter of MDF thru holes, small (2 places)		0.40%	3.2	Gage
102	Diameter of MDF thru hole, large		0.40%	3.2	Gage
103	Diameter of end primer holes		0.40%	3.2	Gage
104	Depth of end primer holes		0.40%	3.2	Gage
105	Pitch diameter of fuze mounting holes		0.40%	3.2	Gage
106	Minor diameter of fuze mounting holes		0.40%	3.2	Gage
107	Minimum full thread of fuze mounting holes		0.40%	3.2	Gage
108	Location of fuze mounting holes		0.40%	3.2	Gage
109	Location of end primer holes		0.40%	3.2	Gage
110	Depth of flexible explosive cavity		0.40%	3.2	Gage
111	Depth of MDF channel min		0.40%	3.2	Gage
112	Width of MDF channel, min		0.40%	3.2	Gage
113	Location of screw holes for divider and collar assembly		0.40%	3.2	Gage
114	Thickness of mounting surface for fuze ring adapter		0.40%	3.2	Gage
115	Location fuze ring adapter mounting holes		0.40%	3.2	Gage
116	Diameter of thru holes for fuze ring adapter screws, max		0.40%	3.2	Gage

NOTES:

DRSMC-0A (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 2 OF 3	DRAWING NUMBER
4.4.2.1	Ring, Fuze		9283969
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
117	Small outside diameter on tapered surface		0.40%	3.2	Gage
118	Large outside diameter on tapered surface		0.40%	3.2	Gage
119	Location of large outside diameter on tapered surface		0.40%	3.2	Gage
120	Width of large 0-ring groove		0.40%	3.2	Gage
121	Depth of large 0-ring groove		0.40%	3.2	Gage
122	Distance from end to side of large 0-ring groove		0.40%	3.2	Gage
123	Distance from end to side of FLSC groove		0.40%	3.2	Gage
124	Width of FLSC groove		0.40%	3.2	Gage
125	Depth of FLSC groove		0.40%	3.2	Gage
126	FLSC groove incomplete		0.40%	3.2	Visual
127	Depth from tapered side to bottom of booster cut out		0.40%	3.2	Gage
128	X-ray		100%	3.2	Test
129	Pitch diameter of divider collar screw holes		100%	3.2	Gage
130	Minor diameter of divider collar screw holes		100%	3.2	Gage
131	Minimum full thread of divider collar screw holes		100%	3.2	Gage

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER
4.4.2.1	Ring, Fuze				9283969
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Depth of insulation groove		0.65%	3.2	Gage
202	Width of insulation groove		0.65%	3.2	Gage
203	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Skin, nose				9208291
					NEXT HIGHER ASSEMBLY
					9208608
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Penetrant examination of welds		100%	3.4.3	4.5.1
102	Length		0.40%	3.2	Gage
103	Thickness		0.40%	3.2	Gage
104	Thickness at nose		0.40%	3.2	Gage
105	Perpendicularity of end		0.40%	3.2	Gage
106	Large inside diameter at basic		0.40%	3.2	Gage
107	Outside contour improper		0.40%	3.2	Gage
108	Chamfer on inside open end missing		0.40%	3.2	Gage
109	Sag		0.40%	3.4.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Latch Assembly				9208333
					NEXT HIGHER ASSEMBLY
					9208608
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	Any part missing or improperly assembled		100%	3.2	Visual
Minor 201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-0A (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Skin, forward				9283967
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Penetrant examination of welds		100%	3.4.3	4.5.1
102	Thickness		0.40%	3.2	Gage
103	Perpendicularity at small end		0.40%	3.2	Gage
104	Perpendicularity at large end		0.40%	3.2	Gage
105	Length		0.40%	3.2	Gage
106	Small inside diameter at basic		0.40%	3.2	Gage
107	Large inside diameter at basic		0.40%	3.2	Gage
108	Outside contour improper		0.40%	3.2	Gage
109	Sag		0.40%	3.4.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.5	Ring, center				9283971
					NEXT HIGHER ASSEMBLY 9283964
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Penetrant examination		100%	3.4.3	4.5.1
102	Overall thickness		0.40%	3.2	Gage
103	Largest outside diameter		0.40%	3.2	Gage
104	Thickness of outer flange at FLSC cutout		0.40%	3.2	Gage
105	Thickness of inner flange at FLSC cutout		0.40%	3.2	Gage
106	Inside diameter		0.40%	3.2	Gage
107	Width of small O-ring groove		0.40%	3.2	Gage
108	Width of large O-ring groove		0.40%	3.2	Gage
109	Distance to side of small O-ring groove		0.40%	3.2	Gage
110	Distance to side of large O-ring groove		0.40%	3.2	Gage
111	Location of FLSC cover mounting holes		0.40%	3.2	Gage
112	Pitch diameter of FLSC cover mounting holes		0.40%	3.2	Gage
113	Minor diameter of FLSC cover mounting holes, max		0.40%	3.2	Gage
114	Location of booster cutouts		0.40%	3.2	Gage
115	Depth of booster cutouts		0.40%	3.2	Gage
116	Location of FLSC cutouts		0.40%	3.2	Gage
117	Radius of reliefs around FLSC cutout on inner flange		0.40%	3.2	Gage
118	Thickness of wall at booster cutout		0.40%	3.2	Gage

NOTES:

DRSMC-0A (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.5	Ring, center				9283971
					NEXT HIGHER ASSEMBLY
					9283964
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE INSPECTION
Minor 201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Center ring assembly	1 OF 1	9283964
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Exposed end of FLSC not sealed		100%	3.2	Visual
102	Any component missing or improperly assembled		100%	3.2	Visual
103	Functioning of center ring test assembly	10(a)	Acc. 0 Rej. 1	3.12	4.5.16/4.4.3.1
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) As required per 4.4.3.1

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.7	Skin, aft				9283968
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Penetrant examination of welds		100%	3.4.3	4.5.1
102	Thickness		0.40%	3.2	Gage
103	Perpendicularity at small end		0.40%	3.2	Gage
104	Perpendicularity at large end		0.40%	3.2	Gage
105	Length		0.40%	3.2	Gage
106	Small inside diameter at basic		0.40%	3.2	Gage
107	Large inside diameter		0.40%	3.2	Gage
108	Sag		0.40%	3.4.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER
4.4.2.8	Ring, aft				9283970
					NEXT HIGHER ASSEMBLY
					9283991
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Penetrant examination		100%	3.4.3	4.5.1
102	Outside diameter		0.40%	3.2	Gage
103	Width of detonating cord and booster assembly groove		0.40%	3.2	Gage
104	Depth of detonating cord and booster assembly groove		0.40%	3.2	Gage
105	Width of insulation groove		0.40%	3.2	Gage
106	Depth of insulation groove		0.40%	3.2	Gage
107	Distance from end to side of insulation groove		0.40%	3.2	Gage
108	Width of O-ring groove		0.40%	3.2	Gage
109	Depth of O-ring groove		0.40%	3.2	Gage
110	Distance from end to side of o-ring groove		0.40%	3.2	Gage
111	Pitch diameter of tee bolt lock mounting holes		0.40%	3.2	Gage
112	Minor diameter of tee bolt lock mounting holes, max.		0.40%	3.2	Gage
113	Minimum full thread of tee bolt lock holes		0.40%	3.2	Gage

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER
4.4.2.8	Ring, aft				9283970
					NEXT HIGHER ASSEMBLY
					9283991
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
114	Distance from end to center of detonating cord and booster assembly groove		0.40%	3.2	Gage
115	Width of detonating cord and booster assembly groove		0.40%	3.2	Gage
116	Depth of detonating cord and booster assembly groove		0.40%	3.2	Gage
117	Thickness		0.40%	3.2	Gage
118	Distance from end to bottom of second largest counterbore		0.40%	3.2	Gage
119	Distance from end to bottom of largest counterbore		0.40%	3.2	Gage
120	Chamfer missing from outside diameter		0.40%	3.2	Visual
121	Diameter of smaller counterbore (with flats)		0.40%	3.2	Gage
122	Thickness of I-section		0.40%	3.2	Gage
123	Location of cutout for electrical receptacle connector of cable assembly		0.40%	3.2	Gage
124	Diameter of counterbore for cable assembly case		0.40%	3.2	Gage
125	Location of counterbore for cable assembly case		0.40%	3.2	Gage
126	Pitch diameter of shear pin holes		0.40%	3.2	Gage
127	Minor diameter of shear pin holes, max.		0.40%	3.2	Gage
128	Pitch diameter of alignment pin holes		0.40%	3.2	Gage

NOTES:

DPSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 3 OF 3	DRAWING NUMBER
4.4.2.8	Ring, aft		9283970
			NEXT HIGHER ASSEMBLY 9283991

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
129	Minor diameter of alignment pin holes, max.		0.40%	3.2	Gage
130	Pitch diameter of booster cover holes		0.40%	3.2	Gage
131	Minor diameter of booster cover holes, max.		0.40%	3.2	Gage
132	Width of T-bolt cutout for tee bolt shank, max.		0.40%	3.2	Gage
133	Location of cutout for tee bolt shank		0.40%	3.2	Gage
134	Width of cutout for tee bolt "handle" (8 places)		0.40%	3.2	Gage
135	Location of cutout for tee bolt "handle" (8 places)		0.40%	3.2	Gage
136	Diameter on inside of aft section seal groove		0.40%	3.2	Gage
137	Depth of aft section seal groove		0.40%	3.2	Gage
138	Width of aft section seal groove		0.40%	3.2	Gage
139	Location of aft section seal groove		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.40%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Aft ring assembly				9283991
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Gap between primers of detonating cord and booster assembly		100%	3.2	Gage
102	Symmetry of detonating cord and booster assembly primers with booster holes		100%	3.2	Gage
103	End primer below surface A		100%	3.2	Gage
104	End primer below surface B		100%	3.2	Gage
105	Height of alignment pin		0.40%	3.2	Gage
106	Height of shear pin		0.40%	3.2	Gage
107	Height of roll pin		0.40%	3.2	Gage
108	Any component missing, damaged or improperly assembled		100%	3.2	Visual
109	Adhesive missing from end primer (View E)		100%	3.2	Visual
110	Adhesive on face of end primer (View E)		100%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.10	Bolt, tee				9237322
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Internal defects inspection		100%	3.2	4.5.4
102	Magnetic particle inspection		100%	3.2	4.5.5
103	Pitch diameter		0.40%	3.2	4.5.6
104	Major diameter		0.40%	3.2	4.5.6
105	Hardness	25(a)	Acc. 0 Rej. 1	3.2	4.5.7
Minor					
201	Symmetry of bolt shank to "A" and "B"		0.65%	3.2	Gage
202	Overall dimension handle, max.		0.65%	3.2	Gage
203	Dimension handle, bearing surface, min.		0.65%	3.2	Gage
204	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) Or five (5) percent of lot, whichever is greater.

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.11	Nut, external wrenching		9237309
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Magnetic particle inspection		100%	3.2	4.5.5
102	Pitch diameter		0.40%	3.2	4.5.6
103	Minor diameter		0.40%	3.2	4.5.6
Minor					
201	Distance across flats of double hex		0.65%	3.2	Gage
202	Largest distance across double hex, min.		0.65%	3.2	Gage
203	Length of double hex, min.		0.65%	3.2	Gage
204	Diameter of bearing surface, min.		0.65%	3.2	Gage
205	Largest outside diameter, max.		0.65%	3.2	Gage
206	Length of largest outside diameter, min.		0.65%	3.2	Gage
207	Overall length, max.		0.65%	3.2	Gage
208	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DD FORM 21 (R) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.12	Pin, alignment	1 OF 1	8877425
			NEXT HIGHER ASSEMBLY 9283991

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Length		0.40%	3.2	Gage
102	Distance to shoulder		0.40%	3.2	Gage
103	Outside diameter		0.40%	3.2	Gage
104	Concentricity of threads		0.40%	3.2	Gage
105	Pitch diameter of threads		0.40%	3.2	Gage
106	Major diameter of threads, min.		0.40%	3.2	Gage
107	Length of chamfer		0.40%	3.2	Visual
108	Locking element missing		100%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.13	Pin, shear	1 OF 1	8877426
			NEXT HIGHER ASSEMBLY 9283991

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Length		0.40%	3.2	Gage
102	Distance from end to shoulder		0.40%	3.2	Gage
103	Outside diameter		0.40%	3.2	Gage
104	Concentricity of threads		0.40%	3.2	Gage
105	Pitch diameter of threads, min.		0.40%	3.2	Gage
106	Major diameter of thread, min.		0.40%	3.2	Gage
107	Locking element missing		100%	3.2	Visual
108	Chamfer missing		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.14	Plunger, spring	1 OF 1	9208288
			NEXT HIGHER ASSEMBLY 9283991

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	End pressure (1/2 way)		0.40%	3.2	Test
102	End pressure (final)		0.40%	3.2	Test
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.15	Spring, pushbutton		9208662-1
			NEXT HIGHER ASSEMBLY 9208333

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	Spring embrittlement	5	Acc. 0 Rej. 1	3.8	4.5.8
Minor 201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.16	Spring, pushbutton		9208662-2
			NEXT HIGHER ASSEMBLY 9208333

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	Spring embrittlement	5	Acc. 0 Rej. 1	3.8	4.5.8
Minor 201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-0A (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.17	Spring, latch				8831279
					NEXT HIGHER ASSEMBLY
					9208333
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	Spring embrittlement	5	Acc. 0 Rej. 1	3.8	4.5.8
Minor 201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.18	Spring, torsion				9208238
					NEXT HIGHER ASSEMBLY 9208333
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	Spring embrittlement	5	Acc. 0 Rej. 1	3.8	4.5.8
Minor 201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.19	Spring, clevis		8836202
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	Spring embrittlement	5	Acc. 0 Rej. 1	3.8	4.5.8
Minor 201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.20	Explosive, flexible		9283966
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Thickness		0.40%	3.2	Gage
102	Contours		0.40%	3.2	Gage
103	Horizontal distance to long leg		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.21	End primer		9208361
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Any component missing		100%	3.2	Visual
102	Outside diameter		0.40%	3.2	Gage
103	Inside diameter		0.40%	3.2	Gage
104	Depth to charge		0.40%	3.2	Gage
105	Length		0.40%	3.2	Gage
106	Density of small charge	5	Acc. 0 Rej. 1	3.2	4.5.10
107	Density of large charge	5	Acc. 0 Rej. 1	3.2	4.5.10
108	Weight of small charge	5	Acc. 0 Rej. 1	3.2	4.5.11
109	Weight of large charge	5	Acc. 0 Rej. 1	3.2	4.5.11
110	Bottom thickness		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	MDF (12 grains per foot)				9253558
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Diameter		0.40%	3.2	Gage
102	Detonation velocity	3(a)	Acc. 0 Rej. 1	3.2	4.5.12
103	Damage		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) One (1) foot lengths.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.23	Booster assembly		9208777
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Length, min.		0.40%	3.2	Gage
102	Outside diameter, max.		0.40%	3.2	Gage
103	Density	5	Acc. 0 Rej. 1	3.2	4.5.10
104	Weight of charge	5	Acc. 0 Rej. 1	3.2	4.5.11
105	Crimp incomplete		0.40%	3.2	Visual
106	End improperly sealed		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DPSMC OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.24	FLSC	1 OF 1	9253547-1
			NEXT HIGHER ASSEMBLY 9283964

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Width		0.40%	3.2	Gage
102	Height		0.40%	3.2	Gage
103	Detonation velocity	3(a)	Acc. 0 Rej. 1	3.2	4.5.12
104	Damage		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) One (1) foot lengths.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.25	FLSC				9253547-2
					NEXT HIGHER ASSEMBLY
					9208362 and 9208363
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Width		0.40%	3.2	Gage
102	Height		0.40%	3.2	Gage
103	Detonation velocity	3(a)	Acc. 0 Rej. 1	3.2	4.5.12
104	Damage		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) One (1) foot lengths.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.26	Detonating Cord Booster				9208663
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Charge missing		100%	3.2	Visual
102	Outside diameter		0.40%	3.2	Gage
103	Length		0.40%	3.2	Gage
104	Density of charge	5	Acc. 0 Rej. 1	3.2	4.5.10
105	Weight of charge	5	Acc. 0 Rej. 1	3.2	4.5.11
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.27	Detonating cord and booster assembly				9247986
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Pull test of crimp		100%	3.6	4.5.9
102	Distance from end to crimp		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil - Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.28	Double end, primer assembly	1 OF 1	9208362-1
			NEXT HIGHER ASSEMBLY: 9247985

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Pull test of crimp		100%	3.6	4.5.9
102	Length		0.40%	3.2	Gage
103	FLSC grommet missing		100%	3.2	Visual
104	Distance from end to crimp		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.29	Double end, primer assembly	1 OF 1	9208362-2
			NEXT HIGHER ASSEMBLY: 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Pull test of crimp		100%	3.6	4.5.9
102	Length		0.40%	3.2	Gage
103	FLSC grommet missing		100%	3.2	Visual
104	Distance from end to crimp		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9208363-1
4.4.2.30	Single end, primer assembly				NEXT HIGHER ASSEMBLY 9247984
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pull test of crimp		100%	3.6	4.5.9
102	Length		0.40%	3.2	Gage
103	FLSC grommet missing		100%	3.2	Visual
104	Distance from end to crimp		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9208363-2
4.4.2.31	Single end, primer assembly				NEXT HIGHER ASSEMBLY 9247983
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Pull test of crimp		100%	3.6	4.5.9
102	Length		0.40%	3.2	Gage
103	FLSC grommet missing		100%	3.2	Visual
104	Distance from end to crimp		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.32	MDF end, primer assembly	1 OF 1	9283981
			NEXT HIGHER ASSEMBLY 9283991

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Pull test of crimp		100%	3.6	4.5.9
102	Length		0.40%	3.2	Gage
103	Grommet missing		100%	3.2	Visual
104	Distance trom end to crimp		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.33	Container, booster		9208779
			NEXT HIGHER ASSEMBLY 9208777

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Length		0.40%	3.2	Gage
102	Inside diameter		0.40%	3.2	Gage
103	Outside diameter		0.40%	3.2	Gage
104	Outside radius, max.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.34	Cover, booster				9208778
					NEXT HIGHER ASSEMBLY
					9208777
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Thickness		0.40%	3.2	Gage
102	Diameter		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.35	Forward shield assembly no. 1				9247983
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Any component missing or improperly assembled		100%	3.2	Visual
102	Depth to end primer		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9247984
4.4.2.36	Forward shield assembly no. 2				NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Any component missing or improperly assembled		100%	3.2	Visual
102	Depth to end primer		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9247985
4.4.2.37	Aft shield assembly				NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Any component missing or improperly assembled		100%	3.2	Visual
102	Height of end primer about aft shield		100%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.38	Tube		9283972
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Length		0.40%	3.2	Gage
102	Diameter of counterbore for collar and divider assembly		0.40%	3.2	Gage
103	Depth of counterbore for collar and divider assembly		0.40%	3.2	Gage
104	Diameter of counterbore for aft plug		0.40%	3.2	Gage
105	Depth of counterbore for aft plug		0.40%	3.2	Gage
106	Width of slot for cable of cable assembly		0.40%	3.2	Gage
107	Depth of slot or cable assembly		0.40%	3.2	Gage
108	Burrs, sharp edges or corners not broken around inside and outside of slot for cable of cable assembly		0.40%	3.2	Visual/Manual
109	Location of slot for cable of cable assembly		0.40%	3.2	Gage
110	Location of holes for MDF retaining block		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.10	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.39	Plug, aft				9283974
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Outside diameter		0.40%	3.2	Gage
102	Diameter of smallest shaft		0.40%	3.2	Gage
103	Height		0.40%	3.2	Gage
104	Distance from largest shoulder to end		0.40%	3.2	Gage
105	Distance from smallest shoulder to end		0.40%	3.2	Gage
106	Width of slot for cable of cable assembly		0.40%	3.2	Gage
107	Distance from side to bottom of slot for cable assembly		0.40%	3.2	Gage
108	Location of slot for cable assembly		0.40%	3.2	Gage
109	Sharp edges, burrs, or radius missing from corners of slot for cable of cable assembly		100%	3.2	Visual/Manual
110	Location of minor diameter of threads		0.40%	3.2	Gage
111	Pitch diameter of threads		0.40%	3.2	Gage
112	Minor diameter of threads, max.		0.40%	3.2	Gage
113	Distance from end to threads		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.40	Cone		9269668
			NEXT HIGHER ASSEMBLY
			9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE INSPECTION METHOD
Critical	None defined.				
Major					
101	Length		0.40%	3.2	Gage
102	Inside diameter		0.40%	3.2	Gage
103	Largest outside diameter		0.40%	3.2	Gage
104	Second largest outside diameter		0.40%	3.2	Gage
105	Density	3(a)		3.2	Test
106	Compressive strength	3(a)		3.2	Test
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) Samples from one (1) part.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.41	Filler, side				9247996
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Length		0.40%	3.2	Gage
102	Small outside diameter at basic		0.40%	3.2	Gage
103	Large outside diameter at basic		0.40%	3.2	Gage
104	Width of cutout at large end		0.40%	3.2	Gage
105	Distance from end to outside shoulder		0.40%	3.2	Gage
106	Distance from outside shoulder to cutout		0.40%	3.2	Gage
107	Distance (large) from end to inside shoulder		0.40%	3.2	Gage
108	Diameter at large end (section A-A) max.		0.40%	3.2	Gage
109	Angle missing from surface at open end (Section A-A)		0.65%	3.2	Visual
110	Density	3(a)		3.2	Test
111	Compressive strength	3(a)		3.2	Test
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) Samples from one (1) part.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.42	Filler, ring				9247992
					NEXT HIGHER ASSEMBLY
					9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Largest outside chord		0.40%	3.2	Gage
102	Second largest outside chord		0.40%	3.2	Gage
103	Third largest chord		0.40%	3.2	Gage
104	Width		0.40%	3.2	Gage
105	Width (at outside) of thru section		0.40%	3.2	Gage
106	Density	3(a)		3.2	Test
107	Compressive strength	3(a)		3.2	Test
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

(a) Samples from one (1) part.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.43	Wedge				9247988
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Outside radius		0.40%	3.2	Gage
102	Height		0.40%	3.2	Gage
103	Width		0.40%	3.2	Gage
104	Density	3(a)		3.2	Test
105	Compressive strength	3(a)		3.2	Test
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) Samples from one (1) part.

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.44	Skin				9269670
					NEXT HIGHER ASSEMBLY
					9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Outside diameter		0.40%	3.2	Gage
102	Inside diameter		0.40%	3.2	Gage
103	Width of flat center section		0.40%	3.2	Gage
104	Thickness		0.40%	3.2	Gage
105	Height of cutoff section		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.45	Spacer	1 OF 1	9283963
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Inside diameter		0.40%	3.2	Gage
102	Outside diameter		0.40%	3.2	Gage
103	Second largest diameter		0.40%	3.2	Gage
104	Depth of cutout for cable assembly case, min.		0.40%	3.2	Gage
105	Width of cutout for cable assembly case, min.		0.40%	3.2	Gage
106	Angular location of cable assembly cutout		0.40%	3.2	Gage
107	Angle of tapered surface		0.40%	3.2	Gage
108	Overall height		0.40%	3.2	Gage
109	Density	3(a)		3.2	Test
110	Compressive strength	3(a)		3.2	Test
111	Height of second largest outside diameter		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:
(a) Samples from one (1) part.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.46	Shield, MDF		9283976
			NEXT HIGHER ASSEMBLY 9283991

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Width of MDF channel		0.40%	3.2	Gage
102	Height (large) of MDF channel		0.40%	3.2	Gage
103	Height (small) of MDF channel		0.40%	3.2	Gage
104	Width of primer cavity		0.40%	3.2	Gage
105	Height of primer cavity		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.47	Bolt				9283962
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined.				
Major					
101	Distance from end to head		0.40%	3.2	Gage
102	Minimum full thread		0.40%	3.2	Gage
103	Pitch diameter		0.40%	3.2	Gage
104	Major diameter, min.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.48	Cable assembly M251				9208657
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None defined				
Major					
101	Insulation resistance		100%	3.2	4.5.13
102	Continuity		100%	3.2	4.5.14
103	Wire braid not covering complete cable assembly (during assembly)		100%	3.2	Visual
104	Angle between wide keyway in connector and adapter ring		100%	3.2	Gage
105	All terminals soldered		100%	3.2	Visual
106	Connector potted		100%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.49	Seal, aft section	1	1	9267740
				NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Direction of wires		0.40%	3.2	Visual
102	Width		0.40%	3.2	Gage
103	Height		0.40%	3.2	Gage
104	Length		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER
4.4.2.50	Metal parts assembly M251 (unpainted)				9283999
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Any component damaged, missing or improperly assembled		100%	3.2	Visual
102	MDF routed improperly through tube		100%	3.2	Visual
103	Cable assembly routed improperly through tube		100%	3.2	Visual
104	Flexible explosive below fuze ring surface		100%	3.2	Gage
105	Gap between booster and end primer, max. (Section B-B)		100%	3.2	Gage
106	Gap between booster and end primer max. (View H-H)		100%	3.2	Gage
107	Overlap of forward shield assemblies no. 1 and no. 2, min.		100%	3.2	Gage
108	Gap between booster and end primer, max. (View T-T)		100%	3.2	Gage
109	Centerline mismatch of booster and end primer, max. (View T-T)		100%	3.2	Gage
110	Overlap of FLSC and end primer, min (Section G-G)		100%	3.2	Gage
111	Distance from skin to end of booster (Section G-G)		100%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 2 OF 3	DRAWING NUMBER
4.4.2.50	Metal parts assembly M251 (unpainted)		9283999
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
112	Distance from outside diameter of end primer to inside surface of skin (Section G-G)		100%	3.2	Gage
113	Gap between booster and end primer, max. (View L)		100%	3.2	Gage
114	Aft ring aft surface to longitudinal end primer (View L)		100%	3.2	Gage
115	Gap between booster and end primer max. (View Z-Z)		100%	3.2	Gage
116	Centerline mismatch of booster and end primer, max. (View Z-Z)		100%	3.2	Gage
117	Gap between booster and end primer, max. (Section R-R)		100%	3.2	Gage
118	Pull test of crimp, 6 places (Section N-N)		100%	3.6	4.5.9
119	Distance from crimp to grommet, 6 places		100%	3.2	Gage
120	Adhesive on face of end primer and booster (2) (View L and Section G-G)		100%	3.2	Gage
121	End primer damaged (View L)		100%	3.2	Visual
122	Adhesive missing from end primer and booster (2) (View L and Section G-G)		100%	3.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER
4.4.2.50	Metal parts assembly M251 (unpainted)				9283999
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
123	Long screws installed in containment block area (8 places)		100%	3.2	Visual
124	Loctite missing from divider collar screws		100%	3.2	Visual
125	Torque of divider collar screws improper (immediately after loctite application)		100%	3.2	Test
126	Divider collar not seated in recess in fuze ring		100%	3.2	Visual
127	Centerline mismatch of end primer and 100gpf FLSC, max. (Section LL-LL)		100%	3.2	Gage
128	Gap between end primer and 100gpf FLSC, max. (Section LL-LL)		100%	3.2	Gage
Minor 201	Evidence of poor workmanship		0.65%	3.13	Visual
NOTES:					

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.51	Metal parts assembly M251		9283999
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Any component damaged, missing or improperly assembled		100%	3.2	Visual
102	Runout		100%	3.2	Gage
103	Tee bolts bind or too loose		100%	3.2	Visual/Manual
104	Receptable connector of cable assembly improperly oriented		100%	3.2	Visual
105	Height of receptable connector above fuze ring		100%	3.2	Gage
106	Functioning of nose assembly		100%	3.2	4.5.15
107	Insulation resistance of cable assembly		100%	3.2	4.5.13
108	Continuity of cable assembly		100%	3.2	4.5.14
109	Steps forward facing, max.		0.40%	3.2	Gage
110	Steps aft facing, max.		0.40%	3.2	Gage
111	Longitudinal steps, max.		0.40%	3.2	Gage
112	Gap between nose assembly and forward skin, max.		0.40%	3.2	Gage
113	Height of aft ring assembly above aft, max.		0.40%	3.2	Gage
114	Marking missing, incomplete, or illegible		0.40%	3.2	Visual
115	Aft skin above aft ring assembly		100%	3.2	Gage

NOTES:

DRSMC-0A (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.51	Metal parts assembly M251				9283999
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
116	Interface of warhead improper		100%	3.2	11430220 11430988
117	Warning plate (decal) missing		100%	3.2	Visual
118	Adhesive missing in skin-slits, on exterior of forward/aft shield assembly screws, or around aft port covers		100%	3.2	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.52	Pkg & Mkg for Warhd Sect., GM, HE: M251; Proc: XM198E1; Tng: M201 (before assembly of cover assembly)				9211190
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Tee bolts not in place in aft support assembly		100%	3.2	Visual
102	External wrenching nuts move when minimum torque is applied		100%	3.2	Gage
103	Safety pin missing or improperly assembled to strap assembly		100%	3.2	Visual
104	Parts in fiberboard box missing, damaged, or improperly assembled		100%	3.2	Visual
105	Fiberboard box improperly assembled, improperly sealed or damaged		100%	3.2	Visual
106	Items taped to shipping and storage container missing, damaged, or improperly assembled.		100%	3.2	Visual
Minor	None defined.				
NOTES:					

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.53	Pkg & Mkg for Warhd Sec., GM, HE: M251; Proc: XM198E1; Tng: M201				9211190
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Cover assembly improperly assembled		0.40%	3.2	Visual
102	T-bolts missing or improperly assembled		0.40%	3.2	Visual
103	T-bolts move when minimum torque is applied		0.40%	3.2	Gage
104	Lead seals missing or improperly assembled		0.40%	3.2	Visual
105	Marking missing, incomplete or illegible		0.40%	3.2	Visual
Minor	None defined.				

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.54	Plate		9269685
			NEXT HIGHER ASSEMBLY 9283999

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	Outside diameter, max.		0.40%	3.2	Gage
Minor	None defined.				

NOTES:

DPSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.55	Setscrew				9313681
					NEXT HIGHER ASSEMBLY 9283997
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Pitch diameter		100%	3.2	Gage
102	Major diameter		100%	3.2	Gage
103	Turned down diameter		100%	3.2	Gage
104	Length of turned down diameter		100%	3.2	Gage
105	Length of threads, min.		100%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.56	Collar		9283973
			NEXT HIGHER ASSEMBLY 9283997

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Burrs or sharp edges around cable assembly cutout		100%	3.2	Visual/Manual
102	Burrs or sharp edges around MDF hole		100%	3.2	Visual/Manual
103	Pitch diameter of thread		100%	3.2	Gage
104	Minor diameter of thread		100%	3.2	Gage
105	Length of thread, min.		100%	3.2	Gage
106	Depth of setscrew hole (small), min.		100%	3.2	Gage
107	Location of thread		0.40%	3.2	Gage
108	Outside diameter		0.40%	3.2	Gage
109	Thickness		0.40%	3.2	Gage
110	Angular location of cable assembly cutout		0.40%	3.2	Gage
111	Distance from center to side of cable assembly cutout		0.40%	3.2	Gage
112	Diameter of MDF hole		0.40%	3.2	Gage
113	Location of MDF hole		0.40%	3.2	Gage
114	Diameter of hole for divider collar		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.57	Collar, divider	1	1	9248003
				NEXT HIGHER ASSEMBLY 9283997

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Thickness of cap screw mounting flange		100%	3.2	Gage
102	Distance from center to side of flat		100%	3.2	Gage
103	Angular location of flat		100%	3.2	Gage
104	Diameter of thru hole		100%	3.2	Gage
105	Distance from end to shoulder of large diameter		0.40%	3.2	Gage
106	Overall length		0.40%	3.2	Gage
107	Largest diameter		0.40%	3.2	Gage
108	Smallest diameter		0.40%	3.2	Gage
109	Distance from shoulder of large diameter to center of thru hole		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.58	Collar and divider assembly				9283997
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Loctite missing from setscrew		100%	3.2	Visual
102	Torque of setscrew improper (immediately after loctite application)		100%	3.2	Test
103	Depth from collar to setscrew, min.		100%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-0A (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.59	Cap screw				MS 16998-59
					NEXT HIGHER ASSEMBLY
					9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE / INSPECTION METHOD
Critical	None detined.				
Major					
101	Pitch diameter		100%	3.2	Gage
102	Major diameter		100%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.13	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-48271A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.60	PAD, port insulation				9329503
					NEXT HIGHER ASSEMBLY 9283999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Length		0.40%	3.2	Gage
102	Width		0.40%	3.2	Gage
103	Thickness		100%	3.2	Gage
Minor	None defined.				

NOTES:

DPSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:55Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First Article and Quality Conformance Inspection tables.

4.4.3.1 Functioning of center ring test assembly (see 3.12). Ten (10) center ring test assemblies containing twenty (20) GPF FLSC, end primers, boosters, and 100 GPF FLSC from the same lot shall be subjected to this test. If a new lot of any of these components is to be used in the fabrication of warheads, this test shall be performed using ten (10) additional center ring test assemblies. If any center ring test assembly fails to meet the applicable requirement, the lot(s) of explosive component(s) causing the failure shall be rejected. This test will not be performed if the explosive component lots have been previously tested in first article (see 4.3.1).

4.4.3.2 Salt spray (see ASTM-B-633 or QQ-P-416 as applicable). Four (4) each of the following parts from each part plating lot shall be subjected to the salt spray test: MS21083-N5, MS27183-7, 8831171, 8831277, 8831279, 8833389, 8836202, 9208238, 9208290, 9208303, 9208320, 9208681, 9208690, 9208708, 9208758, 9208759, 9283989-1, and 9283989-2. If any part from any part plating lot fails to comply with the applicable specification requirement, the parts from that plating lot shall be rejected. This test will not be performed on a part plating lot which has been previously tested in first article (see 4.3.1).

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed in this specification is identified, either directly or by reference, in the "Paragraph Reference/Inspection Method" column of the First Article or Quality Conformance Inspection Tables herein. The contractor shall submit inspection equipment designs to the Government for approval in accordance with the terms of the contract. See 6.3.

4.5 Methods of inspection.

4.5.1 Penetrant examination. The part shall be subjected to penetrant inspection in accordance with MIL-I-6866. Parts so tested, if acceptable, shall be returned to the lot.

4.5.2 Mechanical properties of skin sections. Samples of material from the nose skin, forward skin, and aft skin shall be subjected to the tension test in accordance with ASTM E8-69 (Part 31) to determine tensile strength, yield strength, and percentage of elongation. This is a destructive test. Parts so tested shall not be returned to the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.5.3 Tension test of skin welds. Samples of the welds from the nose skin, forward skin, and aft skin shall be subjected to the tension test in accordance with ASTM E8-69 (Part 31) to determine tensile strength, yield strength, and percentage of elongation. This is a destructive test. Parts so tested shall not be returned to the lot.

4.5.4 Internal defects inspection of tee bolt. The tee bolt shall be inspected for internal defects in accordance with MIL-STD-453, Q.L. 2-2T. Parts so tested if acceptable, shall be returned to the lot.

4.5.5 Magnetic particle inspection of tee bolt and external wrenching nut. The tee bolt and external wrenching nut shall be inspected for defects in accordance with MIL-I-6868 and MIL-B-6812. Parts so tested, if acceptable, shall be returned to the lot.

4.5.6 Inspection of tee bolt and external wrenching nut threads. The threads of the tee bolt and external wrenching nut shall be inspected in accordance with MIL-S-7742. Parts so tested, if acceptable, shall be returned to the lot.

4.5.7 Hardness of tee bolt. The tee bolt shall be subjected to the hardness test in accordance with ASTM E18-67 (Part 31). This is a non-destructive test. Parts so tested if acceptable shall be returned to the lot.

4.5.8 Spring embrittlement. The spring shall be gripped at both ends and extended to the point of minimum permanent distortion. Failure in meeting the requirement shall class the spring defective. Springs so tested shall not be returned to the lot. This test shall be run on each lot of springs.

4.5.9 Pull test of crimp on explosive assemblies. The applicable explosive assembly shall be assembled to a fixture and the required force shall be applied. The assembly shall then be x-rayed in two (2) places, 90° apart, to determine compliance with the applicable gap requirements. This is a non-destructive test. Assemblies so tested, if acceptable, shall be returned to the lot.

4.5.10 Density of explosive assemblies. The explosive material shall be tested for conformance with the density requirement specified on the applicable drawing by determining the volume of explosive material, weight of the complete explosive assembly, and weight of the assemby after the explosive material has been removed. Assemblies so tested shall not be returned to the lot.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the current version before use.

4.5.11 Weight of explosive in explosive assemblies. The explosive assembly shall be tested for conformance with the explosive weight requirement specified on the applicable drawing by weighing the assembly before and after the explosive is removed. Assemblies so tested shall not be returned to the lot.

4.5.12 Detonation velocity. The FLSC or MDF, as applicable, shall be assembled to a fixture and initiated by an end primer (9208361). Instrumentation shall be provided to determine detonation velocity.

4.5.13 Insulation resistance of cable assembly. The cable assembly shall be subjected to the insulation resistance test, per Dwg. 9208657, using approved test equipment. This is a non-destructive test. Assemblies subjected to this test, if acceptable, shall be returned to the lot.

4.5.14 Continuity and resistance of cable assembly. After performance of the test specified in 4.5.13, the cable assembly shall be subjected to the continuity and resistance test, per Dwg. 9208657, using approved test equipment. This is a non-destructive test. Assemblies subjected to this test, if acceptable, shall be returned to the lot.

4.5.15 Functioning of nose assembly. The push buttons shall be depressed using thumb pressure and the latch levers fully opened. The nose skin shall be separated from the fuze ring by pulling forward and turning in a clock-wise direction and then returned to its original position and the latch levers closed. At no time in this test shall there be excessive binding nor shall it be necessary to distort any part in order to reassemble the nose skin to the rest of the warhead. Prior to performing this test, an inert M811, M819 or M816 Fuze, with connector removed, shall be assembled to the fuze ring.

4.5.16 Functioning of center ring test assembly. The center ring test assembly shall consist of the components depicted in Section A-A of Dwg. 9283964. These components shall be attached to a segment of a production center ring that is approximately 6 inches wide at its outside diameter. In addition, a production forward skin (Dwg. 9283967) segment with inspection port and a production aft skin (Dwg. 9283968) segment, both approximately 6 inches wide by 8 inches long, shall be assembled to the center ring test segment. A segment of the forward shield assembly no. 2 (Dwg. 9247984) and a segment of the aft shield assembly (Dwg. 9247985) shall be assembled to the forward and aft skins respectively and terminate at the end of the skins. The 20 GPF

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the currentversion before use.

FLSC assembled to the forward skin shall extend two inches beyond it. The two inch length shall be bent at an angle of approximately 90 degrees. Production screws and sections of forward and aft shield locks shall be used to hold the shield assemblies in place. A booster assembly (Dwg. 9208777) and insulation (Dwg. 9283990-1 and 9283990-2) shall also be assembled to the test setup. Prior to testing, the following inspections shall be performed and recorded:

a. Separation and center line mismatch on View T-T and Section LL-LL of Dwg. 9283999.

b. Gap between primer and 20 GPF FLSC on the two (2) shield assembly segments (determined by x-ray after pull test).

c. Dimensions from surfaces x and y on Dwg. 9283964.

d. Minimum overlap, distance from station 71.50 to end of booster and distance from O.D. of primer to inside surface of skin on Section G-G of Dwg. 9283999.

e. Thickness of forward and aft skins.

f. Thickness of inner and outer webs of center ring.

The final step shall be to assemble a suitable blasting cap to the exposed length of 20 GPF FLSC and to fire the blasting cap. Observation shall then be made for proper functioning.

NOTE: For First Article Inspection, six (6) center ring test assemblies shall be conditioned at -25°F +5°, two (2) at 140°F -5°, and two (2) at ambient. For Quality Conformance Inspection, six (6) center ring test assemblies shall be conditioned at -25°F +5°, two (2) at 140°F -5°, and two (2) at ambient. Each temperature (cold and hot) conditioned test assembly shall be monitored for temperature. The test assembly shall be soaked at the proper temperature for a minimum of four (4) hours.


4.5.17 Salt spray. The test shall be conducted for 96 hours with a 5 percent salt solution in accordance with ASTM B117-73. This is a destructive test. Parts so tested shall not be returned to the lot.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the currentversion before use.

4.5.18 Static detonation of warhead. The warhead (Dwg. 9283999), less nose assembly and clevis assemblies, shall be assembled vertically one (1) foot (approximately) above test surface with forward end up. Two (2) Fastax cameras, 180° apart, shall be aimed in line with the warhead cut lines. The parts depicted in Figures 1 and 2 shall be manufactured and assembled as depicted in Figure 3. The initiator assembly (Figure 3) shall be assembled to the warhead with the capscrews and lock washers specified on Dwg. 9283999. Tighten cap screws to 30 $\pm$ 3 inch-lbs torque. The initiator assembly shall then be fired remotely. After firing, the location of the warhead debris will be plotted on a chart with the warhead location as center. Observation shall be made for any explosive elements not consumed and proper skin and center ring cutting. The film shall then be evaluated for proper warhead functioning. This is a destructive test. This test shall be run at -25°F +5°.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

DETONATOR BLOCK

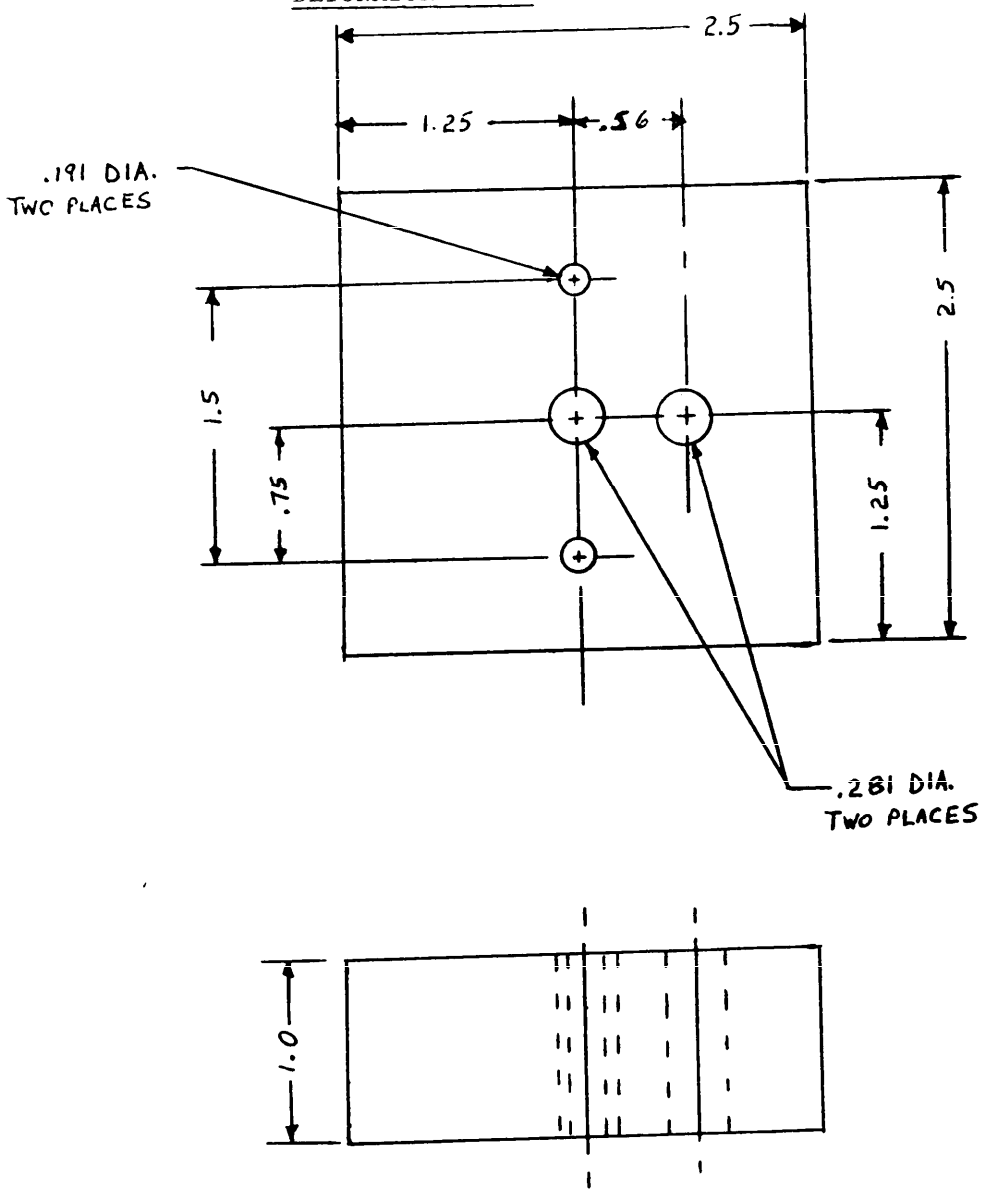

MATERIAL: 2024-T6, 6061-T6, 7075-T6, or 2014-T6 Aluminum Alloy (Plate)

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

MOUNTING PLATE

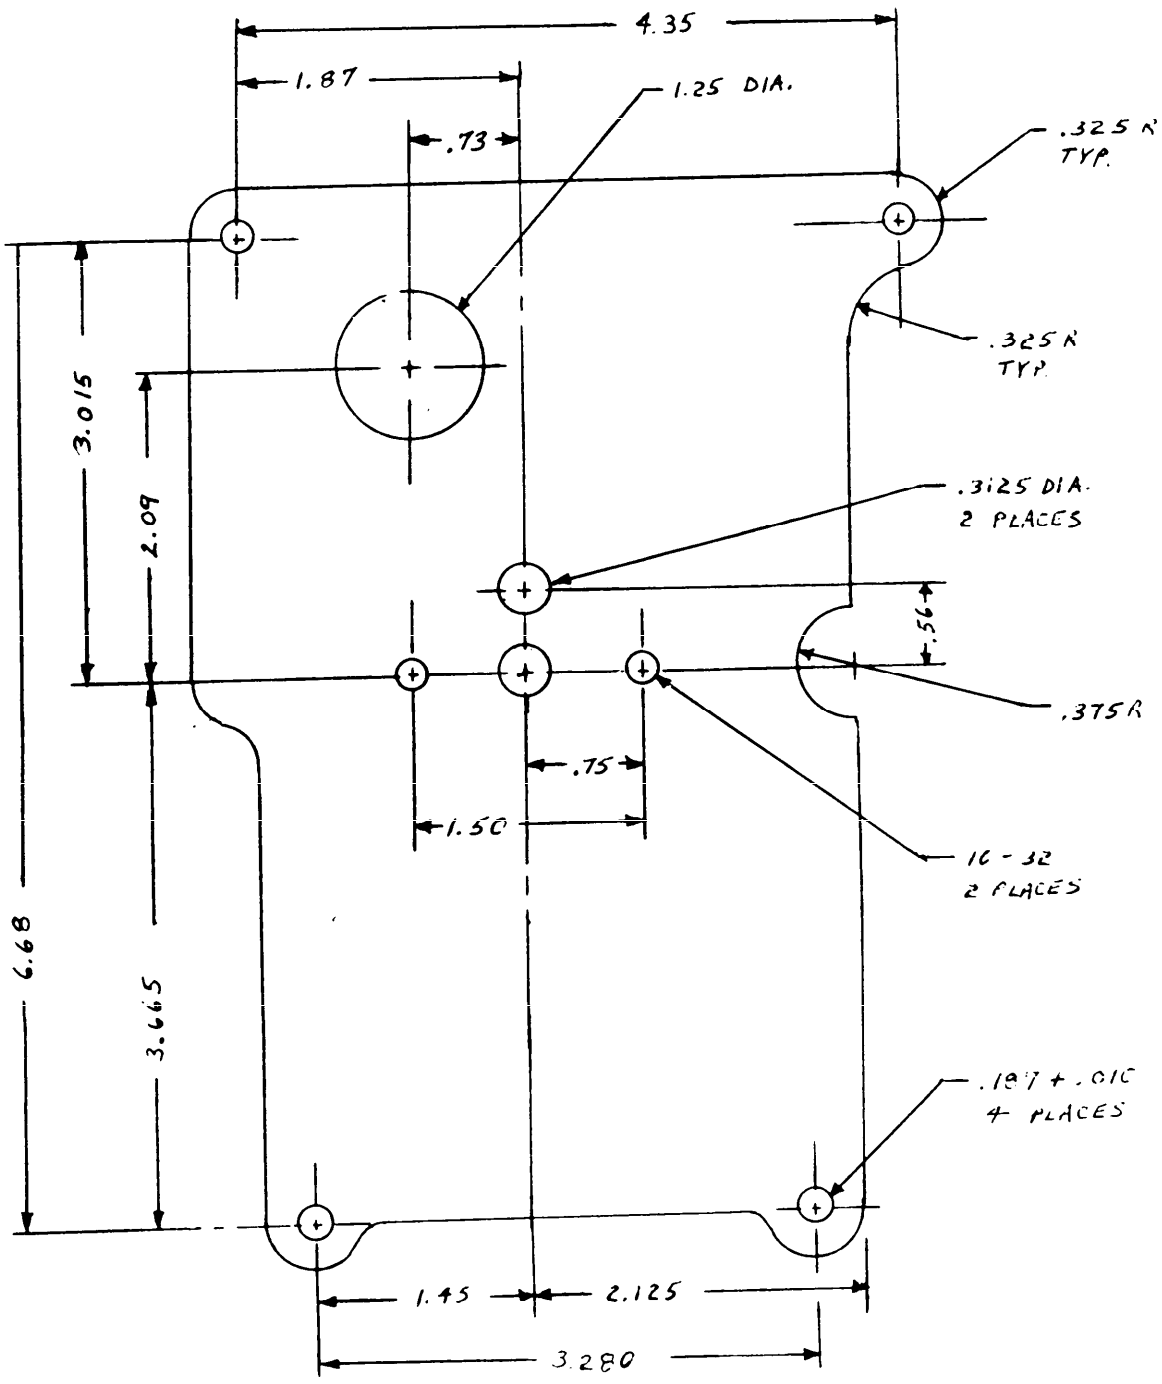


FIGURE 2

MATERIAL:

2024-T6, 6061-T6
7075-T6, or 2014-T6
Alum (Plate)
Thickness: .375

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the current version before use.

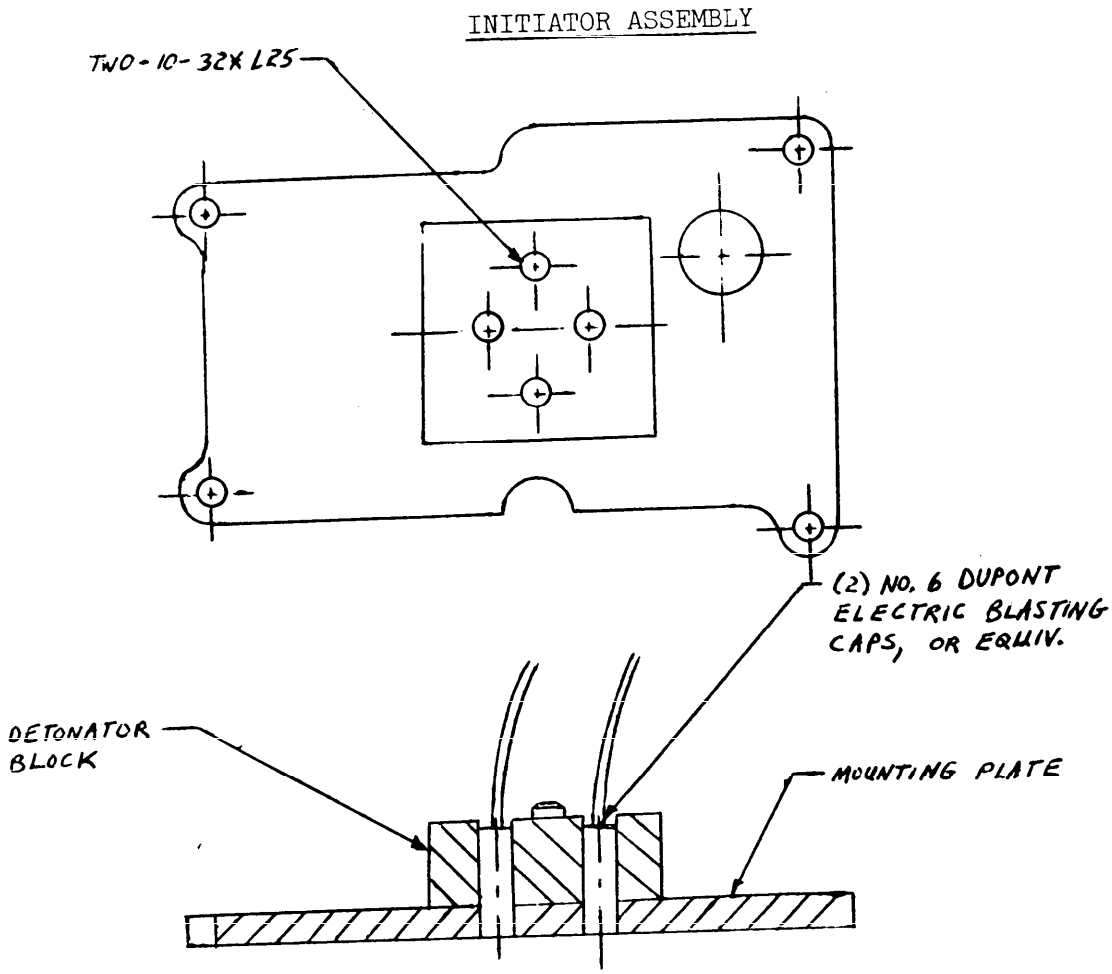


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation and packaging.

5.1.1 Level A. The warhead shall be preserved and packaged in accordance with Dwg. 9211190.

5.2 Packing.

5.2.1 Level A. The warhead, preserved and packaged as specified in 5.1.1, shall be packed in accordance with Dwg. 9211190.

5.3 Marking.

5.3.1 Marking. Marking shall be in accordance with Dwg. 9211190 and Code of Federal Regulations, Title 49, Parts 171-179.

5.4 Shipping.

5.4.1 Shipping. When warheads from more than one lot are shipped as a carload, each lot shall be kept separate, and the division between lots clearly indicated to prevent mixing of the lots in transit.

6. NOTES

6.1 Intended use. The warhead covered by this specification is intended for use on the LANCE Missile.

6.2 Ordering data. See MIL-A-48078(AR).

6.3 Submission of inspection equipment designs for approval. See MIL-A-48078. Submit equipment designs, as required, to Commander, Armament Research and Development Center, US Army Armament, Munitions and Chemical Command, ATTN: DRSMC-QAR-I(D), Dover, NJ 07801.

6.4 Drawings. Drawings listed in Section 2 of this specification under the headings US Army Armament Research and Development Center (ARDC) may also include drawings prepared by and identified as Picatinny Arsenal or ARRADCOM drawings. Technical data originally prepared by these activities is not under the cognizance of ARDC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1340-A683)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT RESEARCH & DEVELOPMENT CENTER
ATTN: DRSAR-QA
DOVER, NJ 07801 5001

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-W-48271A	WARHEAD METAL PARTS ASSEMBLY M251 PARTS AND ASSEMBLING

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.