7-6-63

MIL-E-22200/4C
31 October 1979
SUPERSEDING
MIL-E-0022200/4B(SHIPS)
5 March 1971, and
MIL-E-22200/4A
29 June 1962
(See 6.5)

MILITARY SPECIFICATION

ELECTRODES, WELDING,

COVERED, COPPER-NICKEL ALLOY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers 70:30 copper-nickel covered electrodes used for fabrication and repair welding of copper-nickel alloys.

1.2 Classification. The electrodes shall be furnished in the type, classes, and sizes shown in table I, as specified (see 6.2):

TABLE I. Types, classes, and sizes.

| Type | Class | Positions of welding | Sizes (diameter) |
|---|---|---|---|
| | | | (Inch) |
| MIL-CuNi (70:30) | 1 | All | 3/32, 1/8, |
| | 2 | Horizontal fillets and flat | 5/32, 3/16 |

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-W-10430 - Welding Rods and Electrodes, Preparation for Delivery of.
MIL-C-15726 - Copper-Nickel Alloy Rod, Flat Products (Flat Wire, Strip, Sheet, Bar, and Plate) and Forgings.
MIL-E-22200 - Electrodes, Welding, Covered; General Specification for.

STANDARDS

FEDERAL

FED-STD-151 - Metals, Test Methods.

MILITARY

MIL-STD-147 - Palletized and Containerized Unit Loads 40" X 48" Pallets, Skids, Runners, or Pallet-Type Base.
MIL-STD-271 - Nondestructive Testing Requirements for Metals.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, SEA 3112, Department of the Navy, Washington, DC 20362 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3439

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

PUBLICATIONS

NAVAL SEA SYSTEMS COMMAND
NAVSEA 0900-LP-003-9000 - Radiographic Standards for Production and Repair Welds.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE AGENT
Uniform Freight Classification Ratings, Rules and Regulations.

(Application for copies should be addressed to the Uniform Classification Committee, Agent, Tariff Publication Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
B122 - Copper-Nickel-Zinc Alloy (Nickel Silver) and Copper-Nickel Alloy Plate, Sheet, Strip, and Rolled Bar.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WELDING SOCIETY (AWS)
B4.0 - Standard Methods for Mechanical Testing of Welds.
Z49.1 - Safety in Welding and Cutting

(Application for copies should be addressed to the American Welding Society, 2501 Northwest 7th Street, Miami, FL 33125.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Electrodes furnished under this specification shall conform to the requirements of MIL-E-22200 and as specified herein.

3.2 Coverings.

3.2.1 Composition. The chemical composition of the electrode covering material is optional with the manufacturer, subject to the requirements of 3.4 of MIL-E-22200. The total water content in the covering of each electrode shall be determined as a qualifying test, and moisture result obtained thereby shall be used to establish the maximum moisture level for this electrode under this specification. The maximum moisture content established for each electrode shall be reported in the certification of quality conformance tests (see figure 1).

3.3 Mechanical properties (transverse weld).

3.3.1 Tensile strength. Tensile strength of the welded joint shall be a minimum of 50,000 pounds per square inch ($lb/in^2$).

3.3.2 Bending. After bending, the weld metal of each specimen shall be visually examined on the convex surface by the unaided eye and shall not exhibit evidence of fissuring in excess of two fissures each having a maximum length of 1/8-inch nor exhibit evidence of any fissuring over 1/8-inch long measured in any direction. Cracks occurring on the corners of a specimen during testing shall not be considered.

3.4 Chemical composition. The chemical composition of deposited weld metal shall be as specified in table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

TABLE II. Chemical composition of deposited weld metal (percent)[1/].

| Element[2/] | Percent |
|---|---|
| Copper | Remainder |
| Zinc | * |
| Tin | * |
| Manganese | 1.00 - 2.50 |
| Iron | 0.40 - 0.75 |
| Silicon | 0.50 |
| Nickel (including cobalt) | 29.0 (minimum) |
| Lead | 0.01* |
| Titanium | 0.50 |
| Phosphorus | 0.020 |
| Sulfur | 0.015 |
| Total other elements[3/] | 0.50 |

1/ Single values shown are maximum percentages, except where otherwise specified.
2/ Analysis shall be made for the elements shown in this table. If, however, the presence of other elements is indicated in the course of routine analysis, further analysis shall be made to determine that the total of these other elements is not present in excess of the limits specified for "total other elements" in the table. Specific values shall be reported for the results of each element analyzed including other elements when applicable.
3/ Total other elements, including elements marked with an asterisk (*) shall not exceed the value specified.

3.5 Electrode identification. Electrodes shall be identified as specified in 3.5.10 of MIL-E-22200.

3.5.1 Heat and lot identification. When specified, each electrode shall be marked with heat or lot identification as specified in 3.5.10 of MIL-E-22200 (see 6.2).

3.6 Nominal lengths. The specified nominal lengths of electrodes shall be in accordance with table III (see 6.2).

TABLE III. Nominal lengths.

| Sizes | Electrode lengths, end grip type |
|---|---|
| Inch | Inches |
| 3/32 | 9 or 12 |
| 1/8 | 9 or 14 |
| 5/32, 3/16 | 14 |

3.7 Core wire alloy identity. The core wire alloy identity requirements shall be as specified in 3.6.4 and 3.6.4.1 of MIL-E-22200.

3.8 Covered electrode alloy identity. When specified (see 6.2), the covered electrode alloy identity requirements shall be as specified in 3.6.5 of MIL-E-22200.

3.9 Groove weld soundness. The soundness of groove welds shall meet the requirements of grade 1 of NAVSEA 0900-LP-003-9000 as specified in 3.7.1 of MIL-E-22200.

4. QUALITY ASSURANCE PROVISIONS

4.1 The quality assurance provisions shall be in accordance with MIL-E-22200 and as specified herein.

4.2 Qualification tests. Qualification tests shall be as specified in 4.2 of MIL-E-22200 and tables VI and VII herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

4.3 Comparison inspection. In addition to the examination and tests required in 4.5 of MIL-E-22200, tests specified in table IV shall be conducted as specified in 4.3 of MIL-E-22200, when required by the command or agency concerned.

TABLE IV. Comparison inspection.

| Electrode type | Sizes | Tests | Requirements |
|---|---|---|---|
| MIL-CuNi (70:30) | All | 4.6.8 (MIL-E-22200) | 3.4 and table II herein |
| | | Weld test No. 3 (see table VI herein) | 3.3.1 and 3.3.2 |

4.4 Quality conformance inspection.

4.4.1 Lot. A lot of electrodes shall be as specified in 4.4.2 of MIL-E-22200 for inspection level A.

4.4.2 Sampling for quality conformance inspection. Sampling for quality conformance inspection shall be in accordance with 4.4.7 through 4.4.8.3 of MIL-E-22200.

4.4.3 Quality conformance inspection. The samples selected in accordance with 4.4.2 shall be subjected to the tests specified in table V.

TABLE V. Summary of tests required for quality conformance inspection.

| Electrode type | Required tests | | | Procedures |
|---|---|---|---|---|
| | Chemical analysis | Weld test No. 3 1/ | Weld test No. 8a | |
| MIL-CuNi (70:30) | X | X | X | Chemical: 4.6.8 of MIL-E-22200 and table II herein<br>Weld tests: See table VI |
| | Diameter and length of core wire concentricity | | | See table VII |

1/ For class 2 electrodes wherein test No. 3 is radiographed, test No. 8a may be eliminated (see note 4/of table VI).

4.4.4 Unsatisfactory test results. If the results of the first tests are determined to be unsatisfactory, two retests shall be permitted. The results of both retests shall be satisfactory for quality conformance inspection.

4.5 Test procedures.

4.5.1 Weld tests. Table VI summarizes the weld tests required under this specification for qualification testing of electrodes for the Qualified Products List (QPL) and for quality conformance inspection as specified in table V.

TABLE VI. Summary of required weld tests.

| Weld test No. | Diameter sizes | | | | Weld joint design procedure 1/ | Welding position 2/ | Tests | | | | Requirements |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | 3/32 | 1/8 | 5/32 | 3/16 | | | X-Ray | Tensile | Bend | Chemical analysis 3/ | |
| 3 | X | X | X | X | Figure 2 and notes | F | 4/ | X | X | X | 3.7.1 of MIL-E-22200 3.3 and table II herein |
| 8a | X | X | - | - | Figure 3 and notes | V | X | - | - | - | 3.7.1 of MIL-E-22200 |
| | - | - | X | X | | F | X 4/ | - | - | - | |

See footnotes on next page.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

1/ Direct current, reverse polarity shall be used for all weld tests, with amperages and welding techniques recommended by the manufacturer. Electrical conditions shall be recorded.
2/ F = flat, V = vertical.
3/ May be determined from millings or drillings taken from the weld surface or scrapped ends (see figure 2), along the longitudinal centerline. In the event of variances with composition requirements or conflicting results by testing activities analysis shall be verified by procedure specified in 4.6.8 of MIL-E-22200.
4/ When both tests (3 and 8a) are applicable, radiography of tests No. 3 will satisfy the requirements of test No. 8a for class 2 electrodes, if test No. 3 is radiographed, test 8a may be eliminated for class 2 electrodes.

4.5.2 Other tests. Table VII summarizes tests, in addition to those specified in 4.5.1, required for qualification testing of electrodes for the QPL, comparison inspection, and quality conformance inspection as applicable.

TABLE VII. Summary of other tests.

| Tests | Procedures (MIL-E-22200) | Requirements |
|---|---|---|
| Diameter and length of core wire | 4.6.2.3 | 3.6.1 and 3.6.3 of MIL-E-22200 and 3.6 herein |
| Concentricity | 4.6.2 | 3.5.2 of MIL-E-22200 |
| Dielectric strength 1/ | 4.6.3 | 3.5.4 of MIL-E-22200 |
| Covering, flaking and cracking 1/ | 4.6.4 | 3.5.5 of MIL-E-22200 |
| Covering moisture 1/ 2/ | 4.6.9 | 3.2.1 herein |
| Alloy identity - core wire | 4.6.11 | 3.6.4 and 3.6.4.1 of MIL-E-22200 |
| Alloy identity - finished electrode 3/ | 4.6.11 | 3.6.5 of MIL-E-22200 |

1/ Required for qualification inspection only.
2/ Moisture content established at qualification inspection shall be reported in certification of the quality conformance inspection (see figure 1).
3/ Required when specified (see 6.2).

4.6 Alloy identity certification. When specified (see 6.2), the Government representative shall affix his stamp and date on the container, containing electrodes conforming to 3.6.5 of MIL-E-22200. The letters "AT" shall be affixed to the container adjacent to the date to indicate "Alloy Tested".

4.6.1 The identification of melts, heats, or lots; the general requirements for test specimens; the rejection of nonconforming lots or specimens; and the retest and resubmittal of nonconforming lots shall be in accordance with FED-STD-151.

4.7 Certificate of test. A certificate of quality conformance of the weld tests specified in 4.4.3 (i.e., X-ray, mechanical and chemical analysis), containing actual quantitative test and inspection results including the range of amperage employed in making the required welds for quality conformance inspection for each accepted lot and heat, as applicable, included in a particular shipment shall be furnished to the consignee with the shipment. The certification shall include test results from the quality conformance test for the shipment. The minimum quality conformance test result data required shall be as listed in figure 1 and shall be submitted on form as shown.

5. PACKAGING

(The preparation for delivery requirements specified herein apply only for direct Government acquisitions. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.4.)

5.1 Packaging (see 6.2).

5.1.1 Level A.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

5.1.1.1 All electrodes shall be packaged in class 1 unit containers in accordance with MIL-W-10430.

5.1.1.2 Special instructions. When electrodes are required to be packaged in class 1a unit containers in accordance with MIL-W-10430, fiberboard or other cushioning material shall be inserted in each end of the unit container to restrict the end-wise movement of the electrodes. The cushioning materials shall be dry and in equilibrium with the electrode covering. The cushioning media may be omitted upon the successful completion of the drop test of MIL-W-10430.

5.1.2 Level C. Packaging shall be sufficient to afford adequate protection against deterioration and physical damage during shipment from the supply source to the using activity and for time periods as specified in 3.5.8 in MIL-E-22200.

5.1.2.1 All electrodes shall be packaged in class 1 or 2 containers of MIL-W-10430. Unit container weight shall be in accordance with the manufacturer's commercial practice.

5.2 Packing (see 6.2).

5.2.1 Levels A and B. Electrodes shall be packed level A or B in accordance with MIL-W-10430, except that for levels A and B packing, palletization for other than cylindrical cans shall be in accordance with MIL-STD-147.

5.2.2 Level C. Packing shall be accomplished in a manner which will insure acceptance by common carrier and will afford protection against physical or mechanical damage during direct shipment from the supply source to the using activity. The shipping containers or method of packing shall conform to the Uniform Freight Classification Rules or other carrier regulations as applicable to the mode of transportation.

5.3 Marking.

5.3.1 Interior packages. Shipment marking information shall be provided on interior packages in accordance with the manufacturer's commercial practice. In addition to the lot identification required by 4.4.6 of MIL-E-22200, the information shall include MIL type, size, specification number, manufacturer's or distributor's name, date of manufacture (month/year), and manufacturer's or distributor's brand or type designation. All packag or the smallest integral unit within a shipping container, shall carry the following precautionary label, as a minimum, prominently displayed in legible type on the package:

"PRECAUTIONARY LABEL

WARNING: Protect yourself and others. Read and understand this label.

FUMES AND GASES can be dangerous to your health. ARC RAYS can injure eyes and burn skin. ELECTRIC SHOCK can kill.

- Read and understand the manufacturer's instructions and your employer's safety practices.
- Keep your head out of the fumes.
- Use enough ventilation, exhaust at the arc, or both, to keep fumes and gases from your breathing zone, and the general area.
- Wear correct eye, ear, and body protection.
- Do not touch live electrical parts.
- See American National Standard Z49.1 "Safety in Welding and Cutting" published by the American Welding Society, 2501 N.W. 7th St., Miami, Florida, 33125: OSHA Safety and Health Standards, 29 CFR 1910, available from U.S. Department of Labor, Washington, DC 20210.

DO NOT REMOVE THIS LABEL"

Significant toxic constituents when present in the electrode in greater than trace amounts shall be identified on the caution label so that normal ventilation can be increased accordingly. These constituents include but are not limited to those itemized in section 8.5 through 8.11 of AWS Z49.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

5.3.2 Exterior shipping containers and palletized unit loads. Shipment marking information shall be provided on exterior shipping containers and palletized unit loads in accordance with the manufacturer's commercial practice. In addition to the information required for interior packages as specified in 5.3.1, the information shall include shipping destination, stock number as listed by contract, and customer's order number, customer's item number, and customer's name.

6. NOTES

6.1 Intended use. Type MIL-CuNi (70:30) electrode is intended for use in metal-arc welding of copper-nickel alloy tubing of MIL-T-16420, or plates and shapes of MIL-C-15726.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) Class and size (see 1.2).
(c) Whether heat or lot identification is required for individual electrodes (see 3.5.1).
(d) For 3/32 size electrode, the length required (see 3.6 and table III).
(e) For 1/8 size electrode, the length required (see 3.6 and table III).
(f) Whether alloy identity testing of the core wire of each covered electrode after final marking is required (see 3.8).
(g) Whether alloy identity testing and certification is required for each finished electrode (see table VII and 4.6).
(h) Levels of packaging and packing required (see 5.1 and 5.2).

6.2.1 Electrodes should be ordered by the pound.

6.3 Inspection after delivery. Post delivery inspection of electrodes to determine conformity to this specification and for acceptance thereof is the responsibility of the consignee.

6.4 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in section 2 do not apply when material and parts are acquired by the contractor for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.5 Changes from previous issue. Asterisks (*) are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - AL
Navy - SH
Air Force - 99

Review activities:
Army - MR, AT

User activities:
Navy - OS, MC

Preparing activity:
Navy - SH
(Project 3439-0370)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

Manufacturer or Distributor _____

Address _____

Date _____

Specification MIL- _____

Type MIL- _____

Diameter & Length _____

Inspection Level _____

Lot No. _____

Chemical Analysis (Complete)

Copper _____ Nickel (including Cobalt) _____

Zinc _____

Tin _____ Lead _____

Manganese _____ Titanium _____

Iron _____ Phosphorus _____

Silicon _____ Sulphur _____

Total other elements _____

Chemistry was taken from: ☐ Chem Pad

☐ Groove Weld

X-Ray Results _____

Concentricity (percent) _____

Covering moisture (QPL) _____

Alloy identity tests:

(a) Core wire _____

(b) Finished electrodes _____ (if required; see 4.6)

Customer's Name _____

Customer's Order No. _____

Core Wire Heat No. _____

Lot Identification MIL-E-22200 Pars. _____

Mechanical Test

| | As-Welded |
|---|---|
| Yield Strength (0.2 percent offset method) | |
| Tensile Strength | |
| Elongation (percent in _____ inches | |
| Reduction of Area (percent) | |

Bend Test

Side Bend _____
Side Bend _____
Side Bend _____

Groove Weld Test

| Test No. | 3 | 8a | Chem Pad |
|---|---|---|---|
| Amperage | | | |

Grinding during 8a Test Plate Preparation (See Note 3) Operator Error (Layer(s)) _____

We hereby certify that the above material has been tested in accordance with the listed specification and is in conformance with all requirements.

_____


NOTES:

1. Items not applicable to the type electrode involved or exempted by the acquisition document shall be marked N/A.
2. This form is applicable to the quality conformance tests required for each lot. A copy of the quality conformance test certification for the lot (figure 1) shall be forwarded with each shipment regardless of the identification of the wet mixes of covering mixture represented in this shipment.
3. See 3.5.7 and 3.9 of MIL-E-22200.


FIGURE 1. Certification of quality conformance tests.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

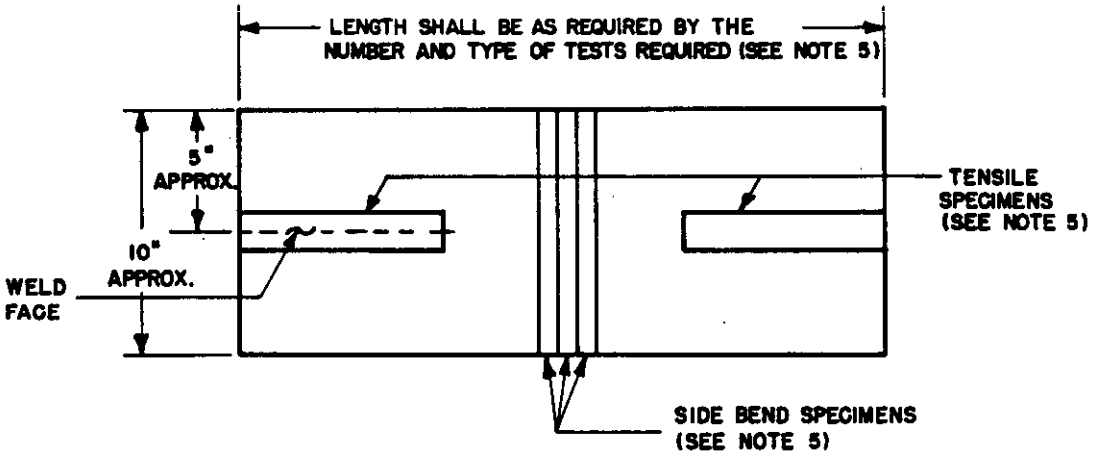


LAY OUT OF TEST PLATE

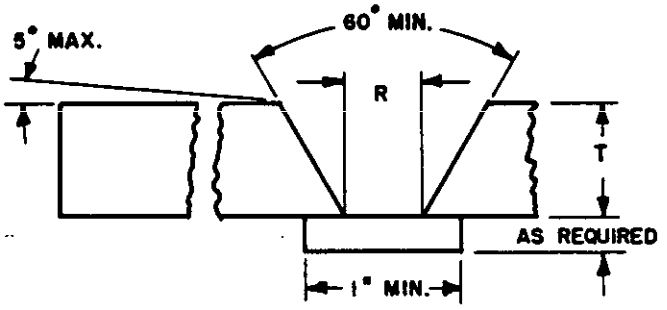


GROOVE PREPARATION OF TEST PLATE

SH 10102

| Electrode size | Minimum thickness (T) | Maximum root opening (R) | Number of layers 1/ | |
|---|---|---|---|---|
| | | | Minimum | Maximum |
| (Inch) | (Inch) | (Inch) | | |
| 3/32 | 1/2 | 1/4 | 1/ | 1/ |
| 1/8 | 1/2 | 1/4 | 1/ | 1/ |
| 5/32 | 3/4 | 1/2 | 6 | 9 |
| 3/16 | 3/4 | 1/2 | 6 | 9 |

1/ Pass and layer sequence shall be recorded and reported.

FIGURE 2. Welded joint for all-weld-metal tension test and bend test (test No. 3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

Notes to figure 2:


1. Welding shall be performed with plate in the flat position.
2. Base metal shall be in accordance with MIL-C-15726 or ASTM B122.
3. No preheat shall be used. Interpass temperature shall be 150°F maximum.
4. Welds shall be deposited in approximately 1/8 inch thick layers using a 3 core wire diameter maximum weave build up sequence. Final layers shall include a weld reinforcement of 1/32 to 1/8 inch. The root weld layer may be deposited with 3/32 or 1/8 inch diameter electrodes when testing 3/16 inch diameter electrodes.
5. The number and type of mechanical tests shall be as follows:

| Electrode type | Size | Number of test specimens | | |
|---|---|---|---|---|
| | | Tensile | | Sidebend |
| | | 0.250 | 0.505 | |
| | (Inch) | | | |
| MIL-CuNi (70:30) | 3/32 | 2 | | 3 |
| | 1/8 | | 2 | 3 |
| | 5/32 | | 2 | 3 |
| | 3/16 | | 2 | 3 |

6. Tensile and bend specimens shall be prepared and tested in accordance with AWS B4.0.
7. The results of tensile and bend tests shall conform to the requirements of 3.3.
8. Radiographic examination of test No. 3 is not required but may be used in lieu of radiography of test No. 8a for class 2 electrodes. When test No. 3 is employed for radiography, after completion of welding, the weld reinforcement and backing strip shall be removed flush with base plate surfaces. The assembly shall be radiographed in accordance with MIL-STD-271. Radiographs shall meet the acceptance standard of NAVSEA 0900-LP-003-9000 as specified in 3.7.1 of MIL-E-22200.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:22Z
Check the source to verify that this is the current version before use.

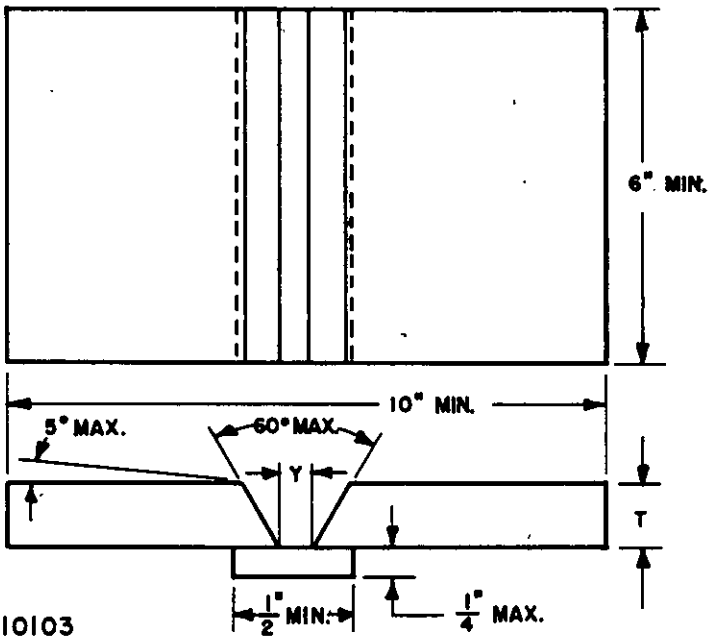


SH 10103

| Electrode size | 3/32 (Inch) | 1/8 (Inch) | 5/32 (Inch) | 3/16 (Inch) |
|---|---|---|---|---|
| Thickness (T) Min. | 1/4 | 3/8 | 1/2 | 1/2 |
| Root opening 1/ | 1/4 | 5/16 | 3/8 | 1/2 |

1/ Tolerance ± 1/16 inch.

Notes to figure 3:

1. Welding shall be accomplished in the vertical or flat position as specified in table VI.
2. Base metal shall be in accordance with MIL-C-15726 or ASTM B122.
3. The bevel edge preparation shall be machined or ground.
4. Welds shall be deposited in approximately 1/8 inch thick layers. Each weld bead shall contain a start in the area to be evaluated. Weld deposits shall be made using a 3 core wire diameter maximum weld weave. The root weld layer may be deposited with 3/32 or 1/8 inch diameter electrodes when testing 3/16 inch diameter electrodes.
5. The completed weld reinforcement shall be 3/16 inch maximum.
6. Preheat shall not be employed. Interpass temperature shall be 150°F maximum.
7. After completion of the weld, the weld reinforcement and backing strip shall be removed flush with base plate surfaces and the assembly shall be X-rayed in accordance with MIL-STD-271.
8. The radiographs shall meet the acceptance standards of NAVSEA 0900-LP-003-9000 as specified in 3.7.1 of MIL-E-22200.

FIGURE 3. Groove weld usability test (test No. 8a).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

**INSTRUCTIONS:** The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-E-22200/4C

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:22Z
Check the source to verify that this is the current version before use.