FED. SUP CLASS
5310

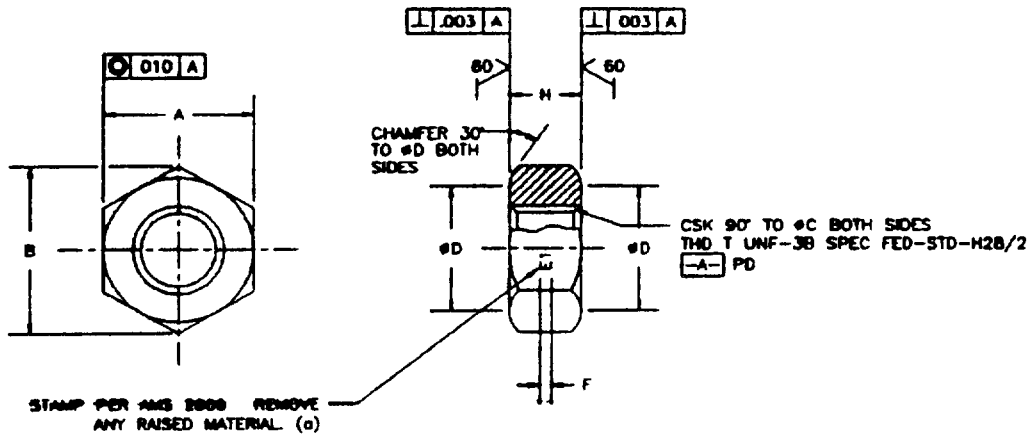


| THD T | A +.002 -.007 | B MIN | øC | øD | F | H | PART NO |
|---|---|---|---|---|---|---|---|
| 190-32 | 375 | 420 | 200 | .375 | 060 ± 020 | 125 | AN150407 |
| 250-28 | 437 | 491 | 260 | 438 | 060 ± 020 | 125 | AN150408 |
| 313-24 | .500 | .562 | 322 | 500 | .060 ± 020 | 156 | AN150409 |
| 375-24 | 562 | 633 | 385 | 562 | 120 ± 030 | 188 | AN150410 |
| 438-20 | 625 | 705 | 448 | 625 | 120 ± 030 | 219 | AN150411 |
| 500-20 | 750 | 847 | 510 | 750 | 120 ± 030 | 250 | AN150412 |
| 563-18 | 875 | 990 | 572 | 875 | 120 ± 030 | 281 | AN150413 |
| 625-18 | 938 | 1 061 | 635 | 938 | 120 ± 030 | 312 | AN150414 |
| 750-16 | 1 062 | 1 203 | 760 | 1 062 | 120 ± 030 | 375 | AN150415 |

(a) MULTIPLE MARKING OF BAR STOCK IS PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN PARTS SHALL BE MARKED BEFORE THREADING DASH NUMBERS MAY APPEAR ON ADJACENT FALTS

REQUIREMENTS

1 MATERIAL STEEL AMS 6320, AMS 6322 OR AMS 6325
2 HARDNESS ROCKWELL C19-26 PARTS SHALL BE HARDENED (OIL QUENCHED) AND TEMPERED BEFORE THREADING
3 FINISH CADMIUM PLATE PER AMS 2400
4 SURFACE TEXTURE ANSI/ASME B46 1 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES
5 PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS2640
6 THREAD INSPECTION SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21

NOTES

1 BREAK SHARP EDGES 003 - 015 UNLESS OTHERWISE SPECIFIED
2 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES LINEAR DIMENSIONS ± 010 ANGULAR DIMENSIONS ± 2°

(1) ENTIRE STANDARD REVISED

INCH-POUND

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE GENERAL STDS FOR AEROSPACE PROPULSION SYSTEMS COMMITTEES OF THE SAE

APPROVED 9 JAN 50 REVISED (1) 1 FEB 1994

| | | |
|---|---|---|
| P.A. DLA - IS<br>Other Cust<br>AS, AV, 82, 99 | AIR FORCE - NAVY AERONAUTICAL STANDARD<br>NUT-HEX, CHECK | AN150401<br>THRU<br>AN150425 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES | SHEET 1 OF 1 |

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5310-1970

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.