MILITARY SPECIFICATION

CLOTH, PILE; ALPACA AND WOOL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers wool pile cloth, and alpaca pile cloth.

1.2 Classification. The cloth shall be of the following types as specified (see 6.2):

Type I	-	Cloth, wool, pile, double face, 5/16 inch.
Type II	-	Cloth, wool, pile, double face, 1/2 inch.
Type VII	-	Cloth, alpaca, pile, single face, 1/2 inch.
Type IX	-	Cloth, wool, pile, double face, 1/4 inch.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-P-1132 - Packaging and Packing of Woolen, Worsted and Wool Blend (Synthetic Fiber; Cotton) Fabrics

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

PUBLICATIONS

U. S. Department of Agriculture

Methods of Test for Grades of Wool Top

(Application for copies should be addressed to the U. S. Department of Agriculture, Agricultural Marketing Service, Washington, DC 20402.)

Rules and Regulations Under the Wool Products Labeling Act of 1939

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Standard sample. The finished cloth shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3).

* 3.2 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.6).

3.3 Materials.

3.3.1 Yarns.

3.3.1.1 Ground or backing yarns. The ground or backing yarns (warp and filling) shall be made from cotton, which has been carded, drawn and spun into yarn. For suggested yarn number see 6.5.

3.3.1.2 Pile yarns.

3.3.1.2.1 Types I, II and IX. The pile yarn shall be two ply, drawn and spun on either the Bradford, French or American system from top combed from fleece or pulled wool or any combination of both. The wool top shall be no lower in grade than 50's nor finer than 56's U. S. Standard. The use of noils, laps, or any other wool manufacturing by-products is prohibited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

3.3.1.2.2 Type VII. The pile yarn shall be 2 ply and made of alpaca fibers, spun on either the Bradford, French or American system from top. The alpaca shall be no less than 56's fineness. The use of noils, laps, or any other alpaca or wool manufacturing by-products is prohibited.

3.4 Color. The color shall be natural for type VII (see 6.4) and natural, or dyed, as specified (see 6.2), for types I, II and IX. When a shade is specified, the color of the finished cloth shall match the standard sample and shall be obtained by the use of chrome or neutral premetallized dyestuffs by piece, stock or yarn dye methods.

3.4.1 Matching. The color of the finished cloth shall match the standard sample under natural (north sky) daylight, or artificial daylight having a color temperature of 7500° Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800° Kelvin.

3.4.2 Colorfastness. The dyed and finished cloth shall show fastness to laundering, wet drycleaning, crocking and perspiration equal to or better than the standard sample. When no standard sample has been established or designated as applicable to colorfastness, the dyed and finished cloth shall show "good" fastness to laundering, wet drycleaning amd perspiration and shall show a Munsell Value for crocking not lower than 8.5. Tests shall be made as specified in 4.5.

3.5 Physical requirements. The finished cloth shall conform to the requirements specified in table I when tested as specified in 4.5.

TABLE I. Physical requirements (minimum)

Type	Weight per square yard	Yarns per inch: Backing warp	Yarns per inch: Pile warp	Yarns per inch: Filling	Pile height	Breaking strength: Warp	Breaking strength: Filling	Animal fiber
	Ounces				Inch	Pounds	Pounds	Percent
I	15.0	38	19	32	5/16 1/	65	50	60
II	20.5	38	19	36	1/2 2/	60	70	60
VII	19.0	54	18	46	1/2	60	90	55
IX	14.0	38	19	32	1/4 3/	65	50	60

1/ Approximately 5/32 inch on each face.
2/ Approximately 1/4 inch on each face.
3/ Approximately 1/8 inch on each face.

3.5.1 Width. Unless otherwise specified (see 6.2), the finished width of the cloth shall be no less than 54 inches, exclusive of selvages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

3.5.2 Weave.

3.5.2.1 Types I, II and IX. The weave shall be a modified "W" weave, which repeats on six double picks. Every third double pick is pulled out of the cloth, thereby swinging half a pile tuft from one face to the other, producing the double pile surface. In the finished cloth, the backing is a plain weave repeating on two dents, the second dent being the reverse of the first dent as shown on figure 1.

3.5.2.2 Type VII. The weave shall be that commercially known as fast pile. The pile shall be interwoven with the backing, each pile tuft being over one under two picks, to be bound into the body of the cloth in a "W" construction. The backing cloth shall be that commercially known as a two and one binding, in which the backing warp threads weave in sets of three warp threads between the pile ends. Two of these backing warp threads, one on each side and adjacent to the pile thread, weave in pairs. When looking at the back of the cloth, they will pass under two, over one, under two, and over one filling pick thread for each repeat of the weave, and will be so arranged that they will be on the opposite side of the filling thread from the pile tuft at each binding. The third ground and end shall weave between the ground threads adjacent to the pile and weave in the opposite direction. A full repeat of the weave is six filling picks, six backing warp ends, and two pile ends (see figure 2).

3.6 Finish. The total sizing, finishing, and other nonfibrous materials content of the finished cloth shall not exceed 2.5 percent when tested as specified in 4.5. The pile shall be tigered, so that the pile tufts are open to within 1/8 inch of the ground cloth and in an upright position. The pile shall be vacuumed to remove the loose fibers. The finished cloth shall show not more than a trace of loose fibers or compound (finishing agents, moth repellent treatment, etc.) when the cloth is shaken vigorously over a smooth black surface (see 4.5).

3.6.1 pH. The pH value of the water extract of the finished cloth shall be no less than 3.3 nor more than 4.5 when tested as specified in 4.5.

3.6.2 Moth repellent treatment. The cloth shall have a properly applied silico-fluoride moth repellent treatment so that the animal fiber will have a minimum of 0.4 percent and a maximum of 0.7 percent fluorine when tested as specified in 4.5.

3.7 Length and put-up. Unless otherwise specified (see 6.2), the cloth shall be furnished in continuous lengths each not less than 30 yards. The cloth shall be put up in full width rolls as specified in PPP-P-1132. The cloth shall be carefully rolled so as to avoid permanent creasing or distortion of the pile.

3.8 Wool content label. Cloth manufactured under this specification shall be labeled in accordance with the Wool Products Labeling Act of 1939 (see 2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished cloth shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required (see 6.2), the preproduction sample submitted in accordance with 3.2 shall be visually inspected for appearance, color and finish, and shall be tested in accordance with the methods specified in 4.5.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Component and material inspection. In accordance with 4.1, above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.1.1 Wool. The wool shall be examined for grade in top form by comparison with the applicable U. S. Standard (see 2.1). In the event of a dispute, the wool grade shall be determined by the width method (wedge). The sample unit shall be 1 yard of undyed top. The sample size (number of sample units) shall be as shown in table II. The lot size shall be expressed in units of one pound. The result from each sample unit shall be reported separately. The lot shall be unacceptable if a single sample unit fails to meet the required grade.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

TABLE II

Lot size (pounds)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

4.4.1.2 Alpaca. The alpaca shall be examined for grade in the top form by comparison with the applicable equivalent U. S. Standard for wool top (see 2.1). In the event of a dispute, the grade of alpaca shall be determined by the width method (wedge). When the width method is used, the fineness computed as the average of 1,200 fiber measurements per sample unit shall conform to the average diameter specified for the equivalent grade of wool top. The sample unit shall be 1 yard of undyed top. The sample size (number of sample units) shall be as shown in table II. The lot size shall be expressed in units of one pound. The results from each sample unit shall be reported separately. The lot shall be unacceptable if a single sample unit fails to meet the required grade.

4.4.2 In-process inspection. Inspection shall be made at any point during any phase of the manufacturing process to assure that only wools and alpaca that have been approved are being used in the specified proportions and that the dyeing requirements have been adhered to. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

4.4.3 Examination of the end item. Examination of the end item shall be in accordance with 4.4.3.1 through 4.4.3.4.

4.4.3.1 Yard-by-yard examination. The required yardage for types I, II and IX cloths shall be examined for defects listed below on one side only; however, the side to be examined shall be alternated on successive rolls. The required yardage for type VII cloths shall be examined for defects listed below on the pile side and the back shall be examined for holes, cuts, tears and grease spots. In no event shall the same defect be counted twice when observed both on the face and back. The defects found shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition of the cloth, in which case only one defect shall be counted. A continuous defect shall be counted as one defect for each warpwise yard or fraction thereof in which it occurs. The sample unit shall be 1 linear yard. The lot size shall be expressed in units of 1 yard each. The acceptable quality level (AQL) shall be 4.0 defects per 100 units (yards). The sample size shall be based upon inspection level II of MIL-STD-105. The number of rolls selected shall be in accordance with table III. An approximately equal number of yards shall be examined in each roll in the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

	Defect (one class)
Cut, hole, tear	Single area, 3/4 inch or more in combined warp and filling directions.

NOTE: Cuts, holes or tears on the selvages shall not be scored unless the body of the cloth is affected.

Pile missing	Areas exceeding 3/4 inch in combined length and width directions.
Crushed pile	Affected area exceeding 3 inches in combined length and width directions. Permanent crease, distorted pile.
Pile improperly formed	Noticeably shorter than normal or cut unevenly.
Uncut pile	Six or more contiguous pile.
Broken or missing yarns	Ground warp or filling, resulting in missing or inadequately secured pile.
Heavy or light filling bar	Resulting in unevenly spaced pile.
Spot, stain or streak	Clearly visible at 3 feet and extending over 1/2 inch or more in combined directions.
Narrow width	Less than specified.

4.4.3.2 Overall examination. Each defect listed below shall be counted not more than once in each roll examined. Types I, II and IX cloths shall be examined on both sides. The sample unit shall be one roll. The sample size (number of rolls selected as sample) and the acceptance number (maximum number of defects acceptable) shall be as shown in table III.

Defects

Degree and character of finish not equal to standard.
Pile tufts not opened to within 1/8 inch of ground cloth.
Overall uncleanness.
Color (when dyed), shaded or mottled, unevenly penetrated, off shade.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

TABLE III. Sample size in rolls and acceptance number

Lot size (yards)	Sample size (rolls)	Acceptance No. 2/
Up to 1200	5 1/	0
1201 up to and including 3200	7	0
3201 up to and including 10,000	10	0
10,001 up to and including 35,000	15	0
35,001 and over	25	1

1/ If a lot contains fewer than 5 rolls each roll in the lot shall be examined.

2/ Except that the acceptance number be "0" for color and uniformity of shade defects found in the overall examination (see 4.4.3.2).

4.4.3.3 Examination for length.

4.4.3.3.1 Individual rolls. The roll shall be examined for length. Any length found to be less than the specified minimum length, or any length found to be more than 1 yard less than the length marked on the roll ticket, shall be considered as a defect with respect to length. The sample unit shall be one roll. The number of rolls selected as sample (sample size) and the acceptance number shall be in accordance with table III.

4.4.3.3.2 Total yardage in sample. The lot shall be unacceptable if the total of the actual lengths of rolls in the sample is less than the total of the lengths marked on roll tickets. The rolls examined shall be those selected from yard-by-yard examination.

* 4.4.3.4 Examination for compliance with the Wool Products Labeling Act. During the yard-by-yard examination, each roll in the sample shall be examined for compliance with the Wool Products Labeling Act. The lot shall be unacceptable if two or more rolls in the sample are not labeled or ticketed in accordance with the Act.

4.4.4 Examination of preparation for delivery requirements. Examination shall be made in accordance with the provisions of PPP-P-1132 to determine that packaging, packing and marking comply with the section 5 requirements.

* 4.5 Tests. The methods of testing specified in FED-STD-191, wherever applicable and as listed in table IV shall be followed. The physical and chemical values specified in section 3 apply to the results of the determinations made on a sample unit for test purposes as specified in the applicable test methods. The sample unit shall be 1-1/2 continuous yards, full width of the finished cloth. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The lot size shall be expressed in units of one yard. All test reports shall contain the individual value utilized in expressing the final result. The sample size (number of sample units) shall be in accordance with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

Lot size in yards	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE IV. Test methods

Characteristic	Requirement paragraph	Test method
Yarn ply	3.3.1	Visual 1/
Colorfastness to (when dyed):		
Laundering	3.4.2	5614 2/
Wet drycleaning	3.4.2	5622
Perspiration	3.4.2	5680
Crocking	3.4.2	5651
Weight	3.5	5041
Yarns per inch:		
Backing Warp	3.5	5050
Pile Warp	3.5	5050
Filling	3.5	5050
Pile height	3.5	4.5.1
Breaking strength:		
Warp	3.5	5100
Filling	3.5	5100
Animal fiber content	3.5	2101
Weave	3.5.2	Visual 1/
Nonfibrous material	3.6	2611
Trace of loose fibers or compound	3.6	Visual 1/
pH	3.6.1	2811
Fluorine content	3.6.2	4.5.2

1/ One determination per sample unit and the results reported as "pass" or "fail".

2/ On the color transfer cloth evaluation, only the stain on the wool fiber of the color transfer cloth shall be evaluated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

4.5.1 Pile height determination. The pile height shall be determined by use of a scale graduated in thirty-seconds of an inch or finer. The end of the scale shall be inserted vertically into the pile so that it rests squarely but without pressure on the backing yarns. The pile adjacent to the face of the scale shall be straightened and laid along the scale surface and measurement taken at the fiber ends. Five determinations shall be made at locations across and along the sample, and the result reported as average of the 5 determinations expressed to the nearest thirty-second of an inch.

4.5.2 Fluorine content determination. The percentage of fluorine shall be as follows:

The chemical reagents and indicator used shall be:

Chemical reagents:

50 percent sulfuric acid (H_2SO_4) in distilled water (by volume).

N/100 thorium nitrate Th $(NO_3)_4$ solution (standardized against a sodium fluoride (NaF) stock solution made up with 1.105 grams NaF per 500 ml).

N/10 hydrochloric acid (HCl) solution.

10 percent sodium hydroxide (NaOH) solution.

Indicator:

0.05 percent aqueous solution sodium alizarin sulfonate.

4.5.2.1 Procedure. Weigh out 0.5 gram (gm) sample of the animal fiber and cut into small pieces. Transfer to a standard fluorine determination apparatus manufactured by Ace Glass Inc., Vineland, NJ, or equivalent apparatus, and add 40 ml. of 50 percent sulfuric acid. Connect flask to fluorine apparatus, and after first heating gradually to dissolve animal fiber, start distillation with strong flame or electric heater: Immerse lower end of condenser in 20 ml. of distilled water in receiving beaker to insure solution of gases. Avoid localized overheating by protecting flask with asbestos sheeting having a relatively small hole placed directly under the bottom of flask. Maintain liquor temperature between 136° and 140°C. by dropping distilled water from separatory funnel inserted in one neck of flask. Collect 200 ml. or a minimum of 176 ml. of distillate, then make up to exactly 200 ml. in volumetric flask. After shaking well, allow to rise to surface in neck of volumetric flask any fats or waxes which may have distilled over from which point they are readily shaken out. For titration, take two 20 ml. aliquot parts, add two drops sodium alizarin sulfonate indicator, one drop of 10 percent NaOH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

Hydrochloric acid N/10 shall then be added to produce a pH of 3.2. Titrate to a faint but definite pink coloration with N/100 Th $(NO_3)_4$ solution.

4.5.2.2 Calculation. The results shall be calculated as follows:

$$\text{Percentage fluorine} = \frac{\text{ml Th } (NO_3)_4 \times \text{normality Th } (NO_3)_4 \times 0.19}{\text{Sample weight}} \times 100$$

NOTE 1. Twenty ml aliquot of distillate should never require more than one drop 10 percent NaOH solution for neutralization. When more is required, contamination of the distillate by decomposition products is indicated. These products interfere with the titration.

NOTE 2. The pH of the solution taken for titration is important. The pH provided by the addition of five drops excess N/10 HCl is ideal.

The use of buffers is not recommended because the end point is not well defined even in the absence of a buffer.

NOTE 3. Sodium ion concentration in the distillate should be kept to a minimum since these ions cause erroneous (high) results.

4.5.2.3 Report. Two specimens shall be tested from each sample unit. The fluorine contents of sample unit shall be the average of the results obtained from the two specimens tested and shall be reported to the nearest 0.01 percent.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Levels A and C. The cloth, shall be put up and packaged in accordance with the applicable requirements of PPP-P-1132.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Levels A, B and C. The cloth shall be packed in accordance with the applicable requirements of PPP-P-1132.

5.3 Marking. In addition to any special marking required in the contract or order, shipments shall be marked in accordance with the requirements of PPP-P-1132.

6. NOTES

6.1 Intended use. The cloth covered by this specification is intended for use as protective lining material for cold climate clothing and in the manufacture of winter flying clothing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and nomenclature of cloth required (see 1.2).
(c) When a first article is required (see 3.2 4.3 and 6.6).
(d) Color required for types I, II and IX (see 3.4).
(e) Width required if other than specified (see 3.5.1).
(f) Minimum length if other than specified (see 3.7).
(g) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Standard sample. For access to standard sample, address the procuring office issuing the invitation for bids.

6.4 Color: type VII. Inasmuch as the natural color of alpaca varies from white through brown to black, bidders should state the exact color which they will furnish if awarded a contract. The right is reserved to specify in schedules, the particular shade or color which may be desired for a specific purpose (see 3.4).

6.5 Suggested, but not mandatory, yarn numbers for the ground or backing yarns specified in 3.3.1.1 are as follows:

Type I - Warp 20s/2; filling 16s/2 or 8s/1
Type II - Warp 20s/2; filling 16s/2 or 8s/1
Type VII - Warp 20s/2; filling 16s/2
Type IX - Warp 22s/2; filling 18s/2 or 9s/1

* 6.6 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample consisting of 3-1/2 yards of the finished cloth. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.7 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 11

Review activities:

Army - MD
Air Force - 82

User activity:


Navy - AS

Preparing activity:

Army - GL

Project No. 8305-0134

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

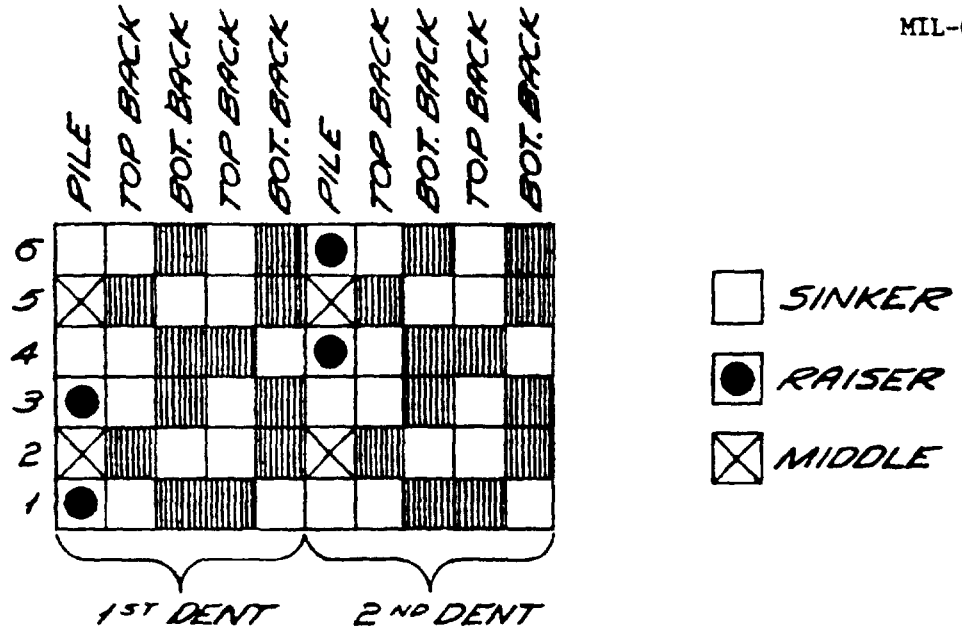

#3 & #6

TOP AND BOTTOM PICKS ARE LIFTED OUT TO THROW HALF OF PILE TUFT TO REVERSE SIDE


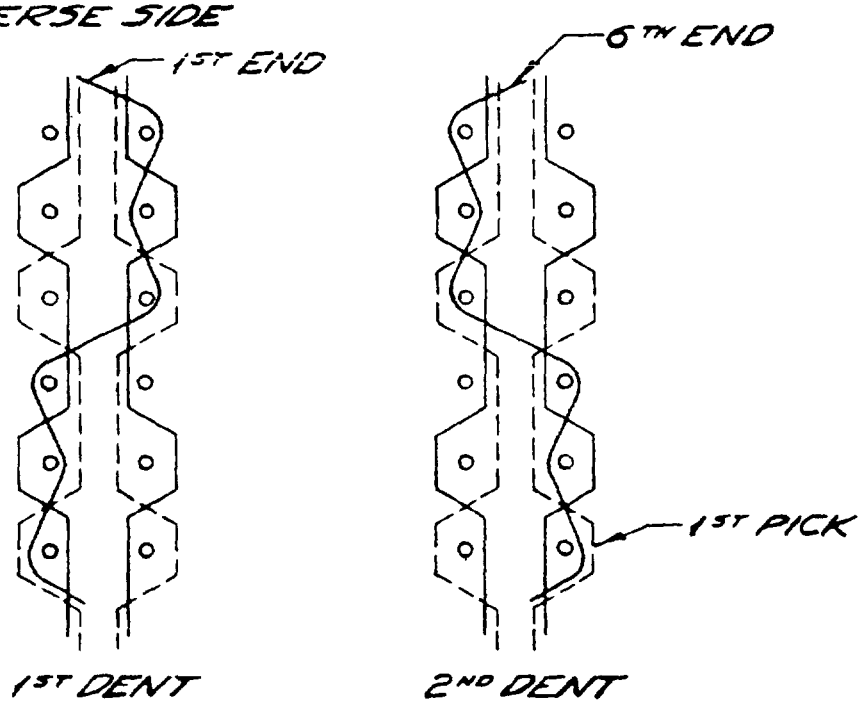


FIG. 1 - WEAVE, TYPES I, II, AND IX

2-1-756

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

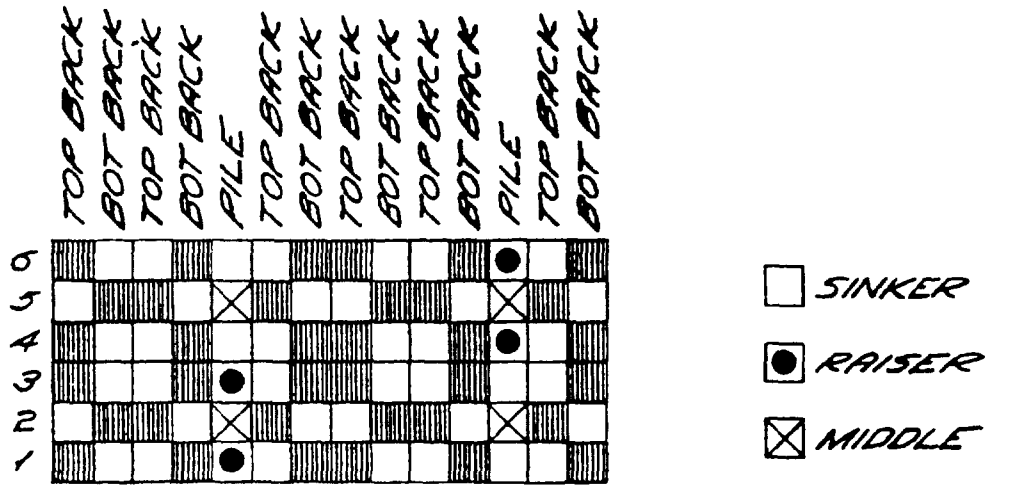

2 DENTS PER REPEAT
6 PICKS PER REPEAT

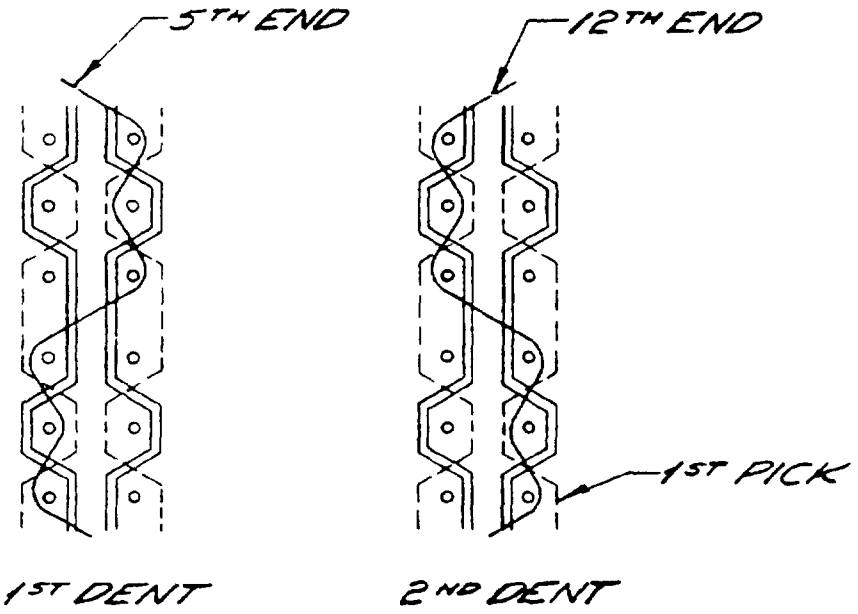


FIG 2 - WEAVE, TYPE VII

2-1-75T

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNLT-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

Commander
US Army Natick Laboratories
ATTN STSNLT-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-C-483D CLOTH, PILE; ALPACA AND WOOL

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes" in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:33Z
Check the source to verify that this is the current version before use.