INCH-POUND

A-A-54727
10 August 1992

COMMERCIAL ITEM DESCRIPTION

DISK, COLOR STANDARDS, ANTI-ICING ADDITIVE

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Military Specification MIL-S-36471 which is cancelled.

This Commercial Item Description covers a color standard disk used in determining the concentration of anti-icing additives in aviation fuel.

Salient characteristics:

Disk shall consist of a flat circular plastic plate containing eight calibrated color glass standards with identifying percentage values on circular plastic inserts and shall be in accordance with figure 1. Color glass standards shall be 9/16 ± 1/32 inch in diameter and shall be of a non-fading, permanent color. The percentage values shall be permanently marked in black print on securely affixed plastic inserts and shall be located at an angle of $140^{\circ} \pm 3^{\circ}$ from the corresponding color standards when measured in a counter-clockwise direction. Values on the disks shall be so positioned as to be upright when viewed through the reading port of a comparator. The inserts shall be flush with the flat surface of the disk. The color glass standards shall be suitable for use in diffused daylight or artificial light. The glass standards shall be secured by means of spring retainer rings with a black ebonal finish, so that they shall not fall out during use and still be replaceable if necessary.

AMSC N/A FSC 6630

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:37Z
Check the source to verify that this is the current version before use.

Color standard disks shall be suitable for determining the percent (by volume) of anti-icing additive in aviation fuel and shall be calibrated to measure the following values: 0.00, 0.04, 0.06, 0.08, 0.10, 0.12, 0.14, and 0.16 percent volume. The color values of the color glass standards in disks shall be made and compared to liquid color standards prepared as specified herein.

Percentage values (by volume) of the color glass standards shall be accurate within the tolerances indicated below, when compared with the liquid standard solutions specified herein.

Percentage Value	Tolerance
0.00	-0.00/+0.01
0.04	-0.01/+0.005
0.06	± 0.005
0.08	± 0.005
0.10	± 0.005
0.12	± 0.005
0.14	± 0.005
0.16	± 0.005

Color glass standards of each production disk shall match the corresponding color standards of the pre-production sample disk when tested as specified herein.

Disks shall have a black, smooth finish (except for inserts and identification markings labels) and shall have no rough or sharp edges. Disks shall show no unsightly finish caused by chipping, filing or grinding of rough ridges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:37Z
Check the source to verify that this is the current version before use.

Disks shall be permanently marked in black print on a securely, affixed, off-white color, rigid plastic label as follows:

ANTI-ICING
26 MM Cell
Percent by Volume
Name or registered trademark of the manufacturer

Labels shall be even with the flat surfaces of the disk.

Workmanship. The disks shall be free from defects which detract from their appearance or impair their serviceability.

Unit. Each (EA). One disk, as specified, constitutes one unit.

QUALITY ASSURANCE PROVISIONS.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:37Z
Check the source to verify that this is the current version before use.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, with an AQL of 2.5 (percent defective) and an inspection level of S-3. The unit of product for inspection purposes shall be one disk.

Sampling for tests. Sampling for tests (dimensional) shall be conducted in accordance with MIL-STD-105, with an AQL of 0 (percent defective) and an inspection level of S-2. The unit of product for test purposes shall be one disk.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Preproduction tests. All color glass standards shall be tested with diffused daylight, incandescent light, and fluorescent light.

Liquid color standards. Color glass standards shall be visually compared with a series of methyl cellosolve-glycerine concentrations treated with potassium dichromate-sulfuric acid solution, in a comparator using sample cells of 26 mm depth.

Color comparison. The color glass standards of each disk shall be visually compared with the color glass standards of the acceptable pre-production sample. Those standards which do not match up shall be retested.

Resistance to delamination. Color glass standards shall be completely imbedded in powdered dry ice (CO_2), one at a time, and allowed to stand for 5 minutes. They shall then be immediately immersed in boiling water for 5 minutes. The color standards shall then be removed from the boiling water and immediately reimbedded in powdered dry ice. This procedure shall be repeated for five complete cycles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:37Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug, and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction , the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug, and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered material. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:37Z
Check the source to verify that this is the current version before use.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities, labeling and marking must be specified in the contract and/or order.

NOTES: The following National Stock Number is covered by this document:

NSN	Item Identification
6630-00-023-2298	DISK, COLOR STANDARDS, ANTI-ICING ADDITIVE

MILITARY INTERESTS:

Custodians:

Army-MD
Navy-MS
Air Force-03

PREPARING ACTIVITY:

DoD-MB

Agent:


DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
USPHS
FDA-MPQAS

Project No. 6630-0526

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:37Z
Check the source to verify that this is the current version before use.

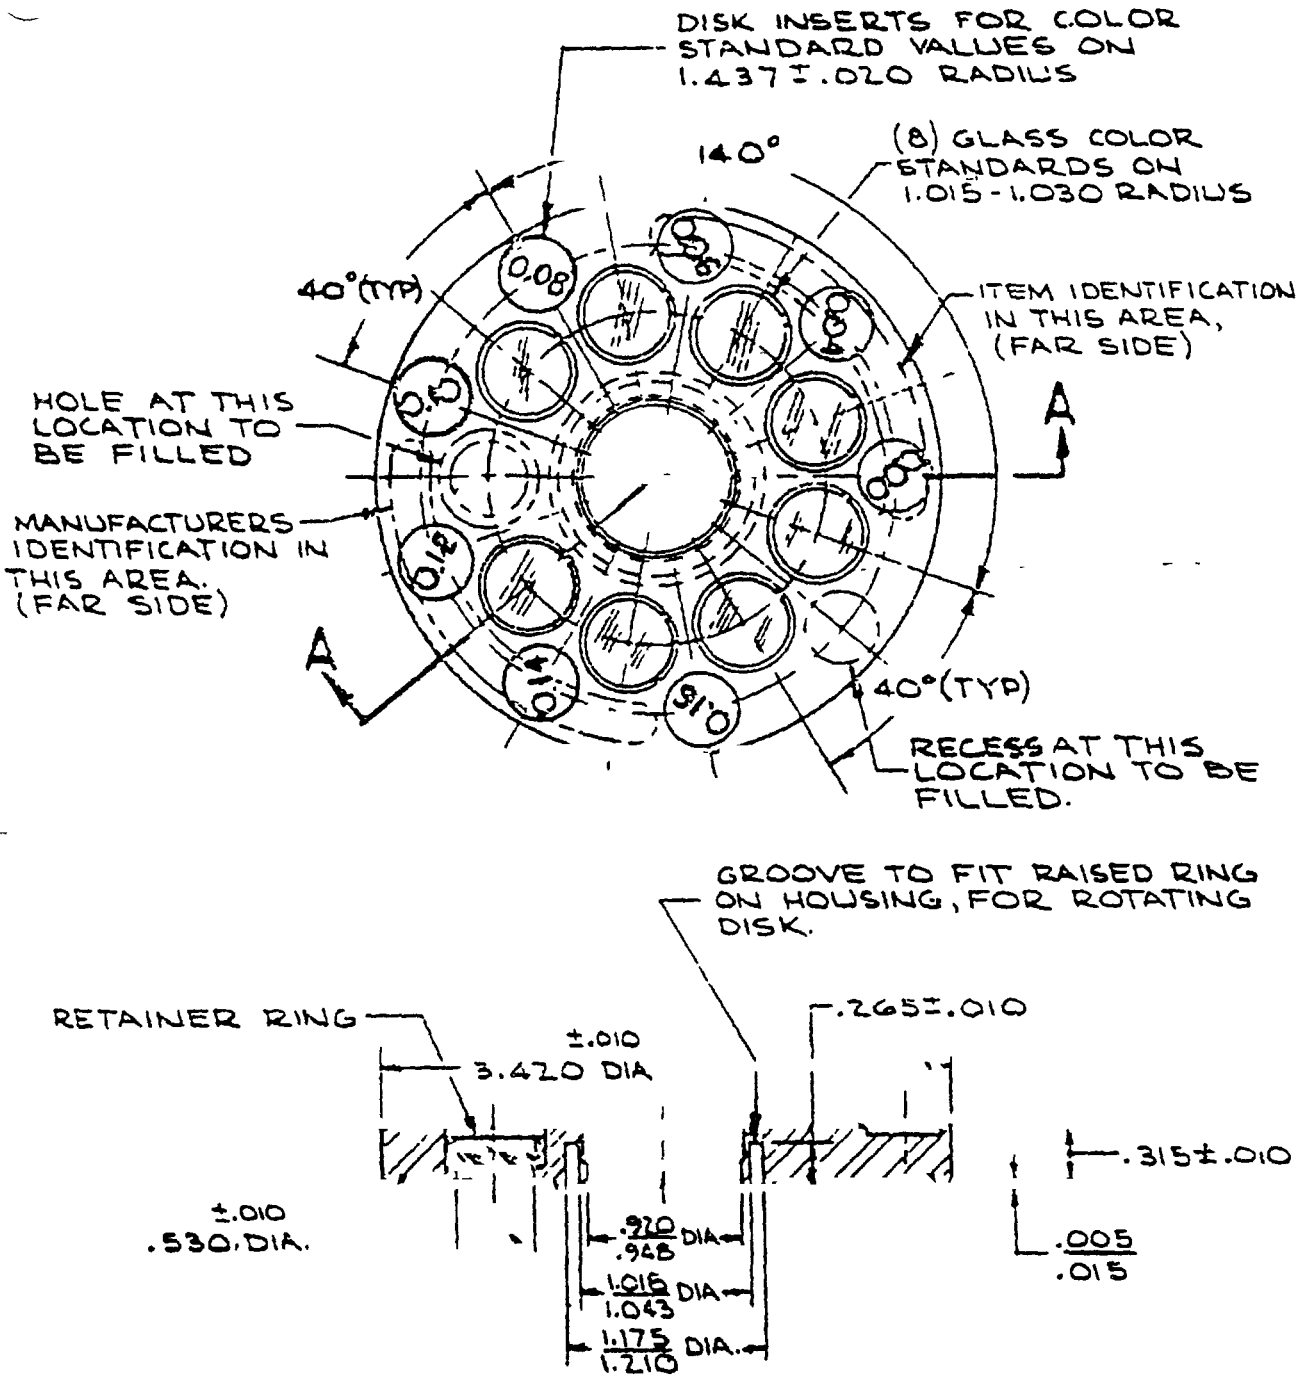

SECTION A-A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

6630-00-023-2298

FIGURE 1 DISK, COLOR STANDARDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:

1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
A-A-54727	10 AUGUST 1992

3. DOCUMENT TITLE

DISK, COLOR STANDARDS, ANTI-ICING ADDITIVE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)
	e. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME

b. TELEPHONE (Include Area Code)
(1) Commercial (2) AUTOVON

c. ADDRESS (Include Zip Code)

IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:
Defense Quality and Standardization Office
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466
Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil/Documents/2026-10-26T09:37Z
Check the source to verify that this is the current version before use.