MILITARY SPECIFICATION

SEAT, TROOP, VARIABLE SEATING WIDTH

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for two types of wall-style, lightweight, folding, variable seating width troop seats.

1.2 Classification. Troop seats shall be of the following types as specified:

Type I - Twenty-Inch Unit
Type II - Forty-Inch Unit

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-F-106	Fasteners, Slide, Interlocking
V-T-295	Thread, Nylon
TT-L-20	Lacquer Camouflage
PPF-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Box, Wood, Nailed and Lock-Comer
PPP-B-636	Box, Shipping, Fiberboard

MILITARY

MIL-P-116	Preservation, Methods Of
D0D-D-1000	Drawing, Engineering and Associated List
MIL-W-4088	Webbing, Textile, Woven Nylon
MIL-C-7219	Cloth, Duck, Wylon
MIL-A-8625	Anodic Coatings, For Aluminum And Aluminum Alloys
MIL-F-8905	Fittings And Cargo Rings, Tiedown, Aircraft Floor
MIL-P-23377	Primer Coating, Epoxy Polyamide Chemical And Solvent Resistant

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Engineering Division, San Antonio Air Logistics Center, Kelly AFB, Texas 78241 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1680

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595	Colors
FED-STD-751	Stitches, Seams, And Stitching

MILITARY

MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Standards And Specifications, Order Of
MIL-STD-831	Test Reports, Preparation of
KIL-STD-889	Dissimilar Metals
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, And Waterproofing; With Appropriate Test Methods.
MS27983	Fastener, Snap, Style 4

AIR FORCE -NAVY AERONAUTICAL

AN7516	Fitting And Cargo Airplane Tie Down

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

*	ASTM B-633-78	Zinc On Iron And Steel, Electro-deposited Coating 31 Mar 78
*	ASTM D-3951-82	Packaging Commercial 21 Jan 82.

{Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First Article. This specification makes provisions for first article testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:03Z
Check the source to verify that this is the current version before use.

3.2 Components. The complete seat assembly shall consist of a metal tubular frame, a fabric bottom, and a back fabricated from webbing.

3.3 Selection of specifications and standards. Specifications and standards or necessary commodities and services not specified herein shall be selected according to MIL-STD-143 except as provided in 3.3.1 and 3.3.2.

3.3.1 Commercial parts. Commercial parts having suitable properties may be used where, on the date of invitation for bids there are no suitable standard parts. In any case, commercial utility parts, like screws, bolts, nuts, cotter pins, having suitable properties may be used provided:

a. They can be replaced by the standard parts (MS or AN without alteration).

b. The corresponding standard part numbers are referenced in the parts list and, if practical, on the contractor's drawings.

3.3.2 Standard parts. With the exception in 3.3.1, MS and AN standard parts shall be used where they suit the purpose. They shall be identified on the drawings by their part numbers.

3.4 Materials.

3.4.1 Fungus proof materials. Materials that are nutrients for fungi shall not be used where it is practical to avoid them. Where used and not hermetically sealed, they shall be treated with a fungicidal agent acceptable to the procuring activity. However, if they will be used in a hermetically sealed inclosure, fungicidal treatment will not be necessary.

3.4.2 Metals. Metals shall be of the corrosion-resistant type or suitably treated to resist corrosion due to fuels, salt spray, or atmospheric conditions likely to be met in storage or normal service.

3.4.2.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.5 Design. The seat shall be designed for installation on the right or left side of the airplane in such a manner that the occupants face inboard and, also, be capable of installation in two rows, back to back in the center of the airplane so that the occupants face outboard. The installed areas shall provide a variable seat width of 20 to 24 inches per occupant by adjustment of the seat belt attachment points. The seat shall provide maximum comfort and ease of releasing for stowing.

3.5.3 Folding and stowing. All seats shall be so designed that the leg or legs and seat bottoms may be quickly folded against and lashed to the seat back with the leg or legs in between the seat bottom and seat back.

3.5.1.1 Folding and unfolding time. The seats shall be designed to permit folding and lashing or unlashing and unfolding quickly and easily without the use of tools or special equipment by one man, in a period not to exceed 10 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:03Z
Check the source to verify that this is the current version before use.

3.5.1.2 Rolled stowage. All seats shall be designed for rolled stowage. They shall be designed in such a manner that the legs and spreaders may be folded and the seat back may be quickly detached from the upper seat support tube which is considerd a part of and is attached to the airplane to permit the seat to roll up against the sides of the fuselage. One and two straps shall be provided and attached to the type 1 and type II seats, respectively for the purpose of lashing the seats in the rolled stowed position.

3.5.1.3 stowing and unstowing time. The seats shall also be stowable and unstowable quickly and easily by one man, without the use of tools or special equipment in a period not to exceed 2 minutes. Stowage straps shall be positioned to provide for the tightest possible lashing.

3.5.1.4 Size of package. The seat package of the seats shall be held to a maximum size of 6 inches in diameter when in the rolled stowed position.


3.5.2 Leg supports. The legs of the seats shall be located as shown in Figures 1 and 2. The base of the legs shall contain fittings that will connect with the stud of the tie-down fitting shown in MIL-F-8905 and AN7516. The tie-down fitting shall be installed in the airplane flush with the floor surface and located as shown in Figures 1 and 2. The leg fittings shall be of the quick release type and the release actuating lever on operating control shall be located at the top of each leg in such a manner that they will be easily accessible to the seat occupants without bending over. The seat leg attachment fitting shall be so designed that the fittings will automatically open and snap on the floor tie-down stud when a downward force is applied to the seat leg. The seat leg shall be designed to permit attachment to the floor tie-down stud for any position of the floor stud within a l-l/2-inch diameter circle, the center of the circle being the true position in the standard 20-inch floor grid pattern.

3.5.2.1 Brace for leg supports. The type I seat shall be designed to support the required side load without diagonal bracing. The type II seat shall have rigid braces, if any, that are adjustable, and may be connected or disconnected quickly and easily without tools or special equipment. Braces that are net positively locked at both ends shall be subject to approval by the procuring agency.

3.5.3 Seat bottom and back. The seat bottom and back shall be fabricated to provide maximum comfort and durability.

3.5.3.1 Seat bottom construction. The seat bottom shall be made of one piece with provisions for attachment to the rear support tube which is removable for the installation of the seat. Minimum size cutouts in the seat bottoms shall be provided for attachment of seat legs and spreaders as required. Every effort shall be made to make the cutouts of a minimum size and number to prevent equipment that is being carried by paratroopers from accidently snagging the seat. All cutouts shall be bound with l-inch wide tape conforming to MIL-W-4088, type II. Snap fasteners conforming to MS27983 shall be installed in accordance with Figures 3 and 4. Means shall be provided for tightening the seat bottom. Sufficient clearance between seat bottom and spreader shall be provided in order that the seat bottom will not contact the spreader under the specified proof loads of 4.4.2.1. The material used for the seat bottom shall be nylon cloth conforming to MIL-C-7219, Type III. The nylon cloth shall be attached to the forward seat beam by some continuous support or attachment to prevent failure in service.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T11:03Z
Check the source to verify that this is the current version before use.

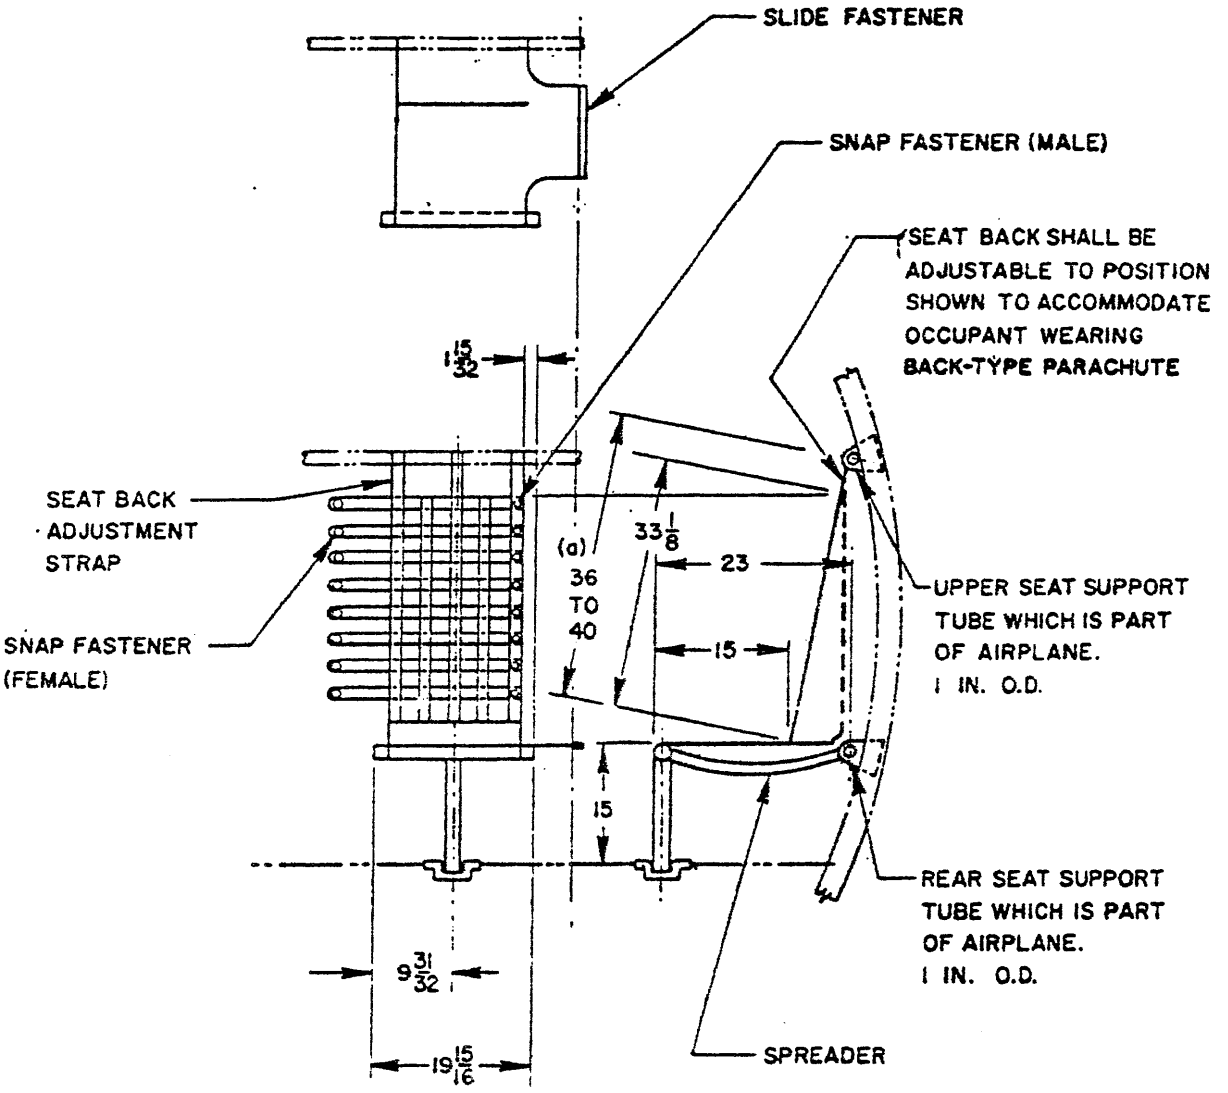


DIMENSIONS IN INCHES.

(a) 36 TO 40 DIMENSION INDICATES THE PERMISSIBLE VARIATION OF THE LOCATION OF THE UPPER SEAT SUPPORT TUBE. SEAT BACK ADJUSTMENT STRAPS SHALL BE MADE TO ACCOMMODATE THIS VARIATION.

FIGURE I. DIMENSIONS OF ONE-MAN SEAT

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

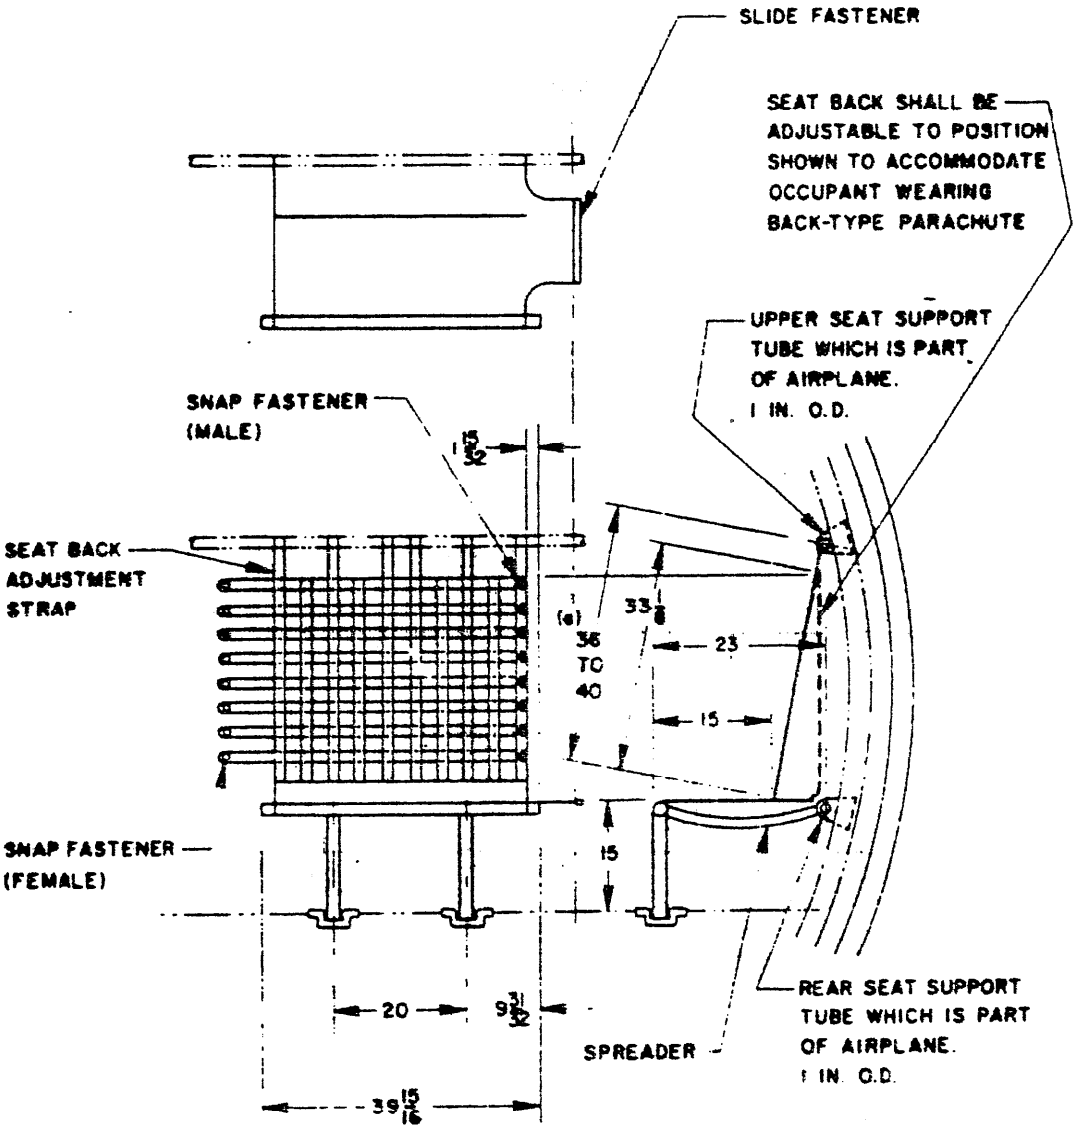


DIMENSIONS IN INCHES.

(a) 36 TO 40 DIMENSION INDICATES THE PERMISSIBLE VARIATION OF THE LOCATION OF THE UPPER SEAT SUPPORT TUBE. SEAT BACK ADJUSTMENT STRAPS SHALL BE MADE TO ACCOMODATE THIS VARIATION.

FIGURE 2. DIMENSIONS OF TWO-MAN SEAT


Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

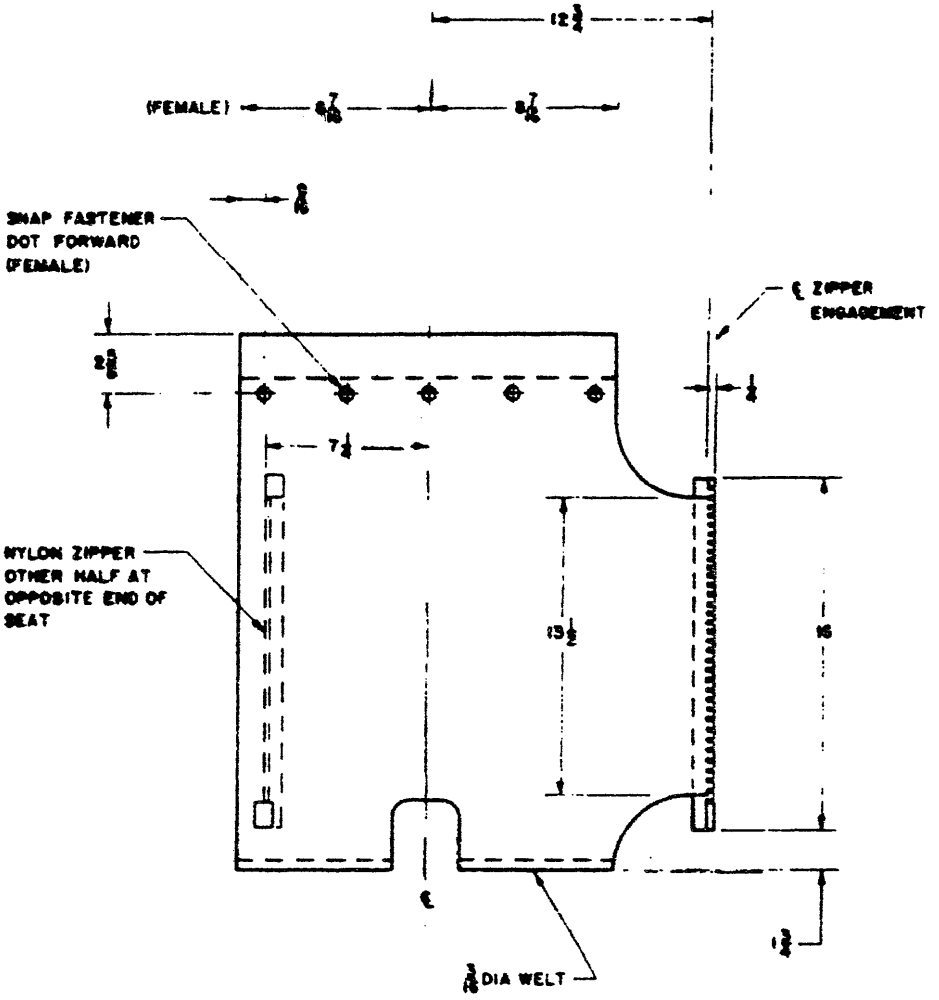

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCE ON FRACTIONAL DIMENSIONS ± 1/16.

FIGURE 3. LOCATION OF FASTENERS ONE-MAN SEAT BOTTOM

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

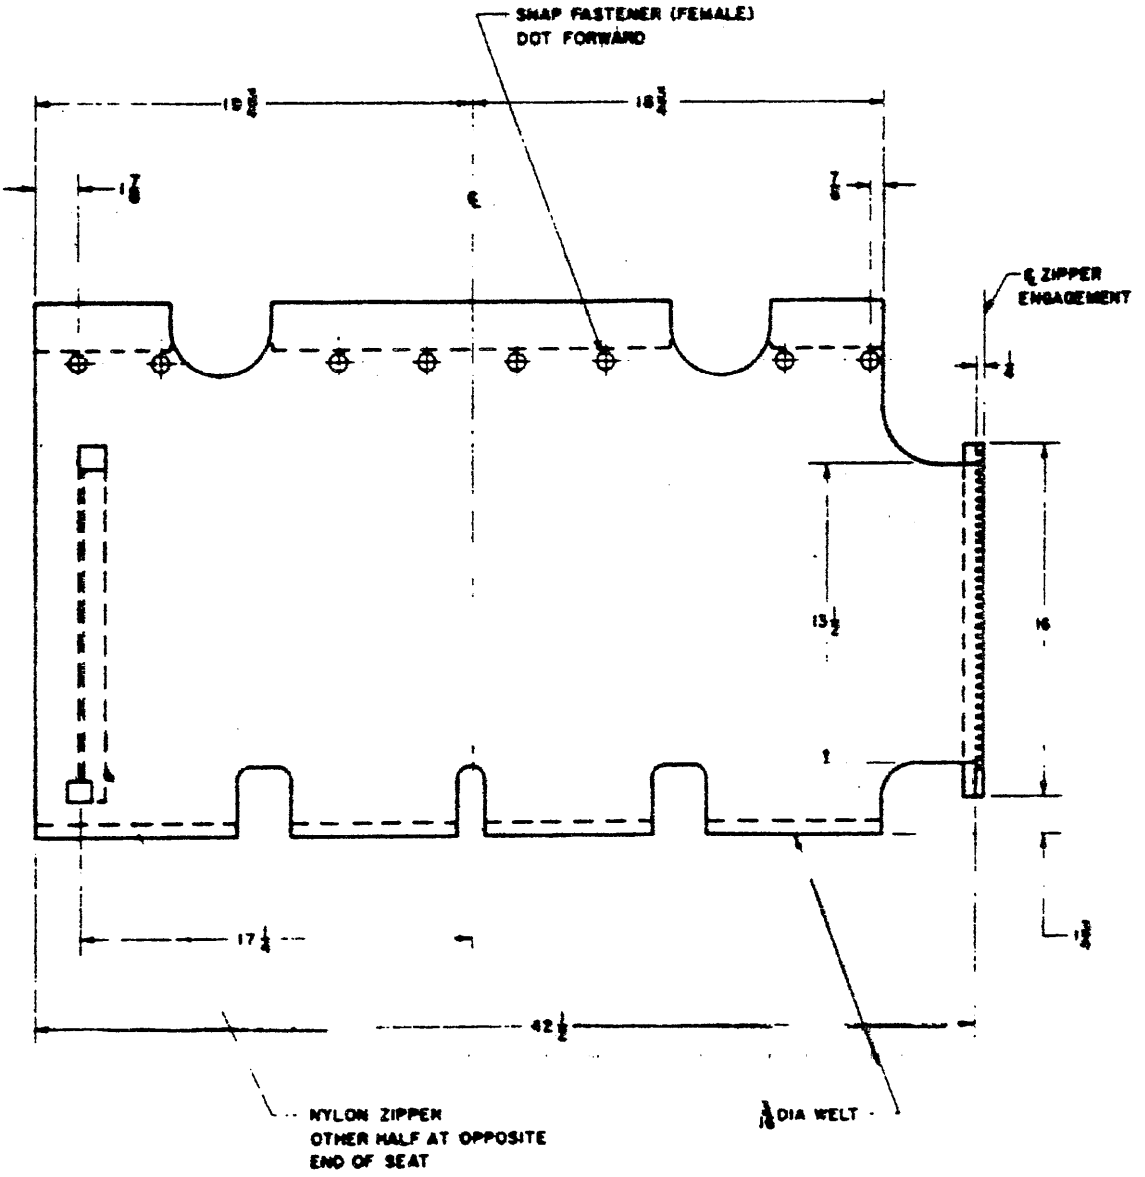

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCE OF FRACTIONAL DIMENSIONS ±1/16.

FIGURE 4. LOCATION OF FASTENERS FOR TWO-MAN SEAT BOTTOM

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

3.5.3.2 Seat panels. Adjacent seat bottoms shall be attached by a slide fastener conforming to the requirements of V-F-106, type IV, size MH, style 7, class A. The joint shall not sag but provide a continuous seat bottom. Seats shall be easily joined and unjoined when the seat bottoms have varying adjusted cloth tensions in relation to each other.

3.5.3.3 Back support. The tape (webbing) material used for the seat back and seat back adjustment straps shall be 1-1/4 inches in width, conforming to MIL-W-4088, type III. The tapes shall be equally spaced as shown in Figures 5 and 6 and shall be sewed together at the points where they cross or intersect. Snap fasteners conforming to MS27983-1N and MS27983-2N shall be installed in accordance with Figures 5 and 6. The lower part of the back support shall be nylon cloth, conforming to MIL-C-7219, Type III. The seat back shall be adjustable and shall be quickly detachable from the upper seat support tube.

3.5.3.4 Back support length. The back support, in addition to having material to provide for an adjustment of 36-40 inches, shall have enough material to allow the back support to lay against the seat bottom. Snap fasteners conforming to the requirements of MS27983-1N shall be spaced as shown in Figures 3 and 4 to provide the maximum seating space for paratroopers carrying full equipment.


3.5.4 Front support tube. Each seat shall be so designed that the front support tube, seat bottom and seat back may be joined to the corresponding parts of an adjacent seat in any combination on either the left side or right side of the aircraft. The front support tube shall be easily and quickly connected to or disconnected from the adjoining seat. The mechanism should have a mimimum number of parts as practicable and shall not require lubrication. The mechanism shall lock positively and shall be provided with a positive lock for stowing the interlocking portion of the mechanism when not in use. Any two installed adjoining seats shall have a clearance between butting front support tubes not exceeding 1/16 inch. The mating parts shall conform with the dimensions of Figure 7.

3.5.5 Independent release. It shall be possible to release the legs and front support tubes of adjoining and joined seats in any combination or number and stow them without disturbing the remaining seats.

3.6 Construction.

3.6.1 Methods. Riveting or welding may be used for assembly of component parts fabricated of metals suitable for this type of construction. Fittings and joints, which require disassembly of the component parts of the seat, shall be bolted. All thread and stitches used for sewing seat back and seat bottom shall be in accordance with V-T-295 and FED-STD-751, type 301, respectively.


Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

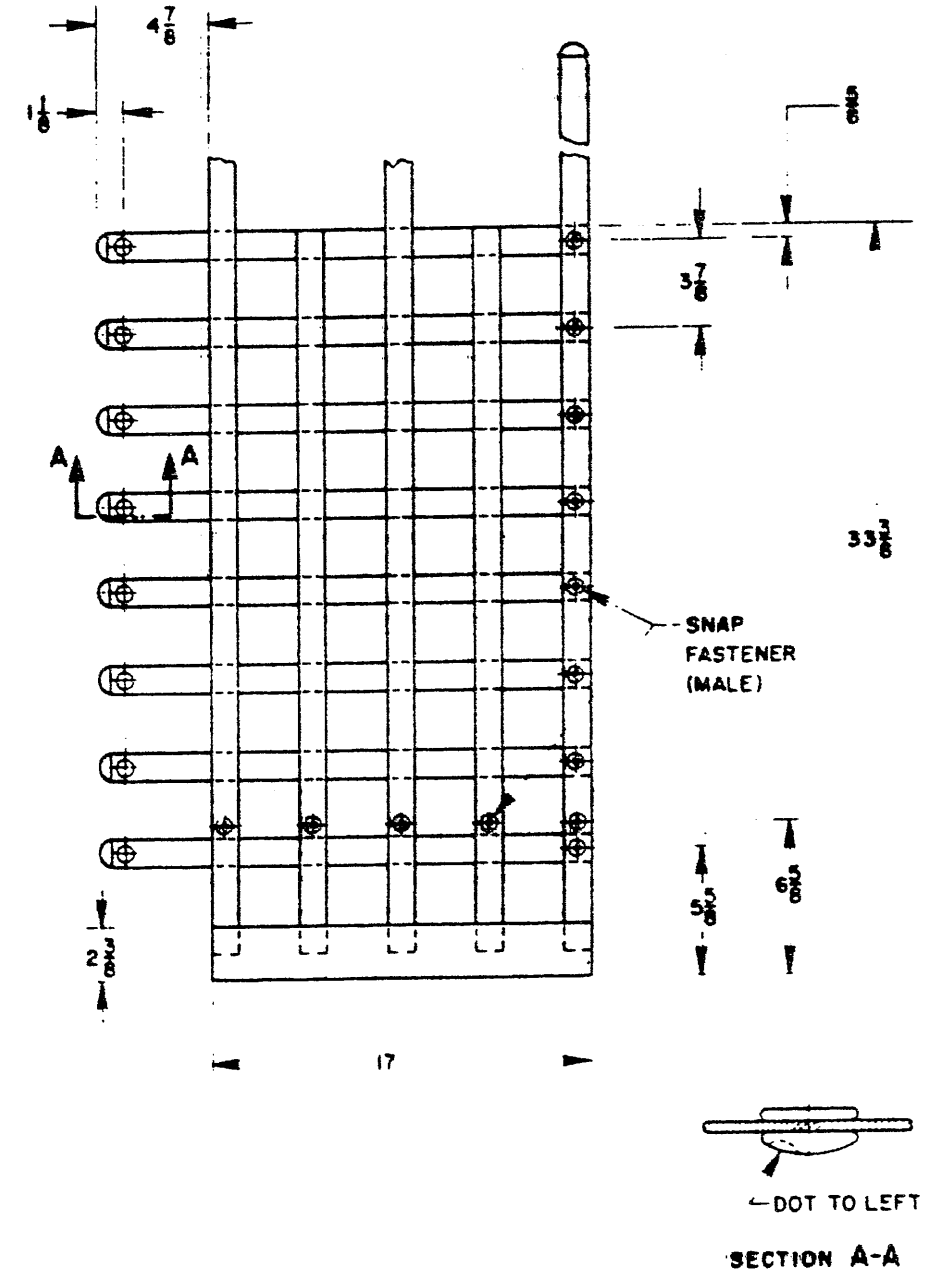

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCE ON FRACTIONAL DIMENSIONS ± 1/16

FIGURE 5. LOCATION OF SNAP FASTENERS ONE-MAN SEAT BACK

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

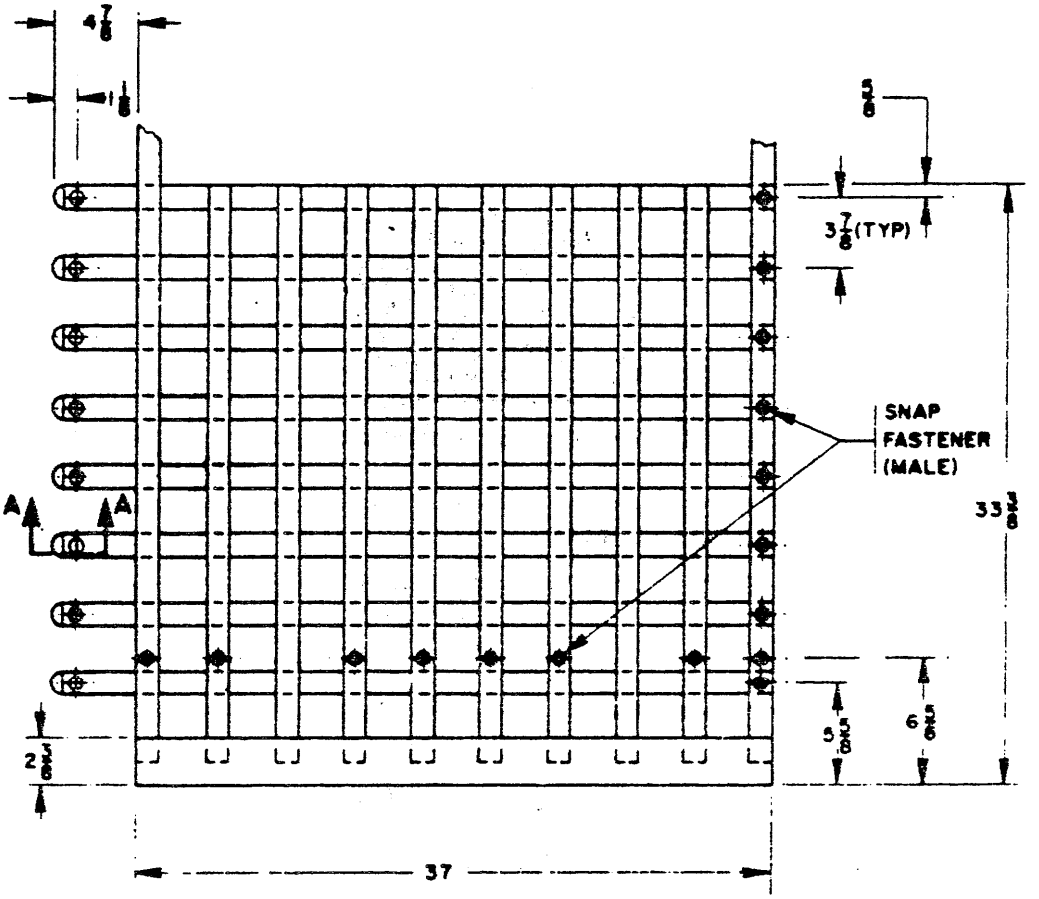





SECTION A-A

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCE ON FRACTIONAL DIMENSIONS $\pm\frac{1}{16}$.

FIGURE 6. LOCATION OF SNAP FASTENERS TWO-MAN SEAT BACK

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

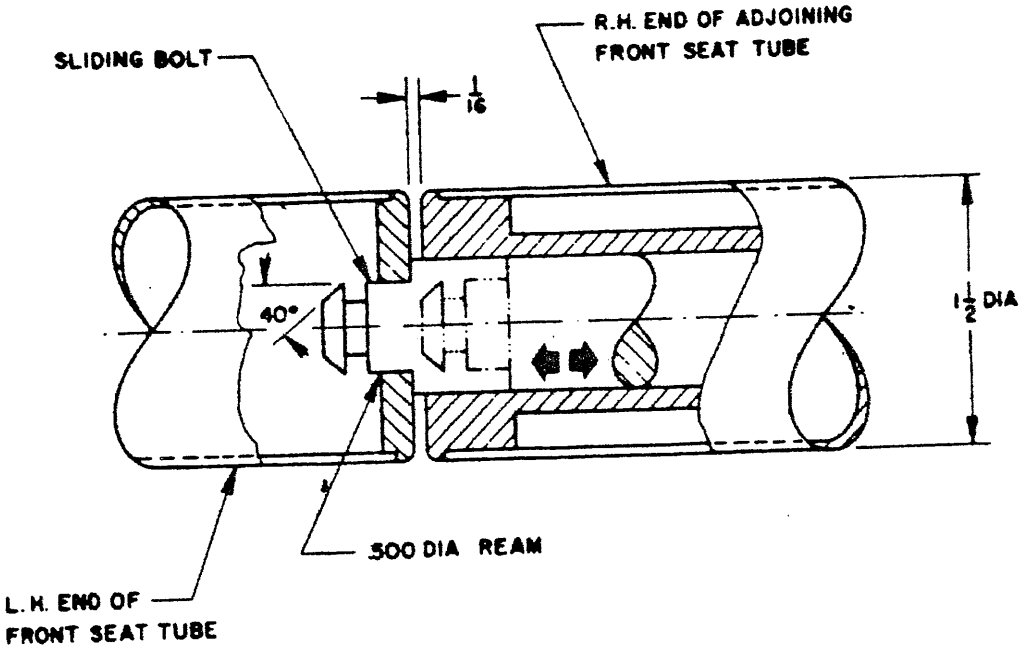

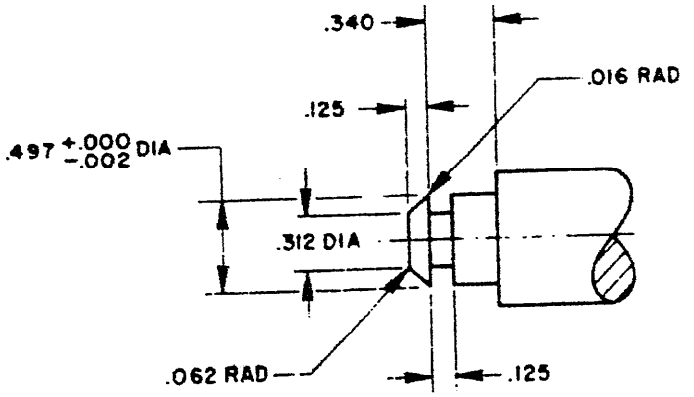

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED,
TOLERANCES: FRACTIONAL DIMENSIONS ± 1/64
DECIMAL DIMENSIONS ± .005

FIGURE 7. DIMENSIONS OF FRONT SUPPORT TUBE LOCKING MECHANISM

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

3.6.2 Projections. The surfaces of the seats shall be free from projections that could catch or damage by abrasion the clothing of the occupant. The exterior surfaces of all the metal parts shall be free from sharp edges or any projections which might scratch the hands or clothing of the occupant.

3.7 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The drawing number requirements of DOD-D-1000 shall govern changes in the manufacturer's part numbers.

3.8 Weight. The weight of the seat including all parts and adequate finish coating shall not exceed the following.

Type I - 5 pounds
Type II- 8.5 pounds

3.9 Color. Unless otherwise specified by the procuring activity, the material for the seat back and seat bottom shall be vat dyed maroon (red) conforming to color number 21136 of FED-STD-595.

3.10 Finish. Aluminum alloy parts shall be anodically treated in accordance with MIL-A-8625, type II and noncorrosive resisting steel parts shall be zinc plated in accordance with ASTM B-633-78, primer MIL-P-23377, top coat TT-L-20 Color 36231.

3.11 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.12 Workmanship. The seat, including all parts and accessories, shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of welding, riveting, machine-screw assemblies, freedom of parts from burrs and sharp edges, unraveled edges of cloth, and straightness of stitched seams.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein, Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of the seats shall be classified as follows:

a. Acceptance tests

b. First article inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:03Z
Check the source to verify that this is the current version before use.

4.3 Acceptance tests. Acceptance tests shall consist of:

a. Individual tests

b. Sampling plans and tests

4.3.1 Individual tests. Each seat shall be subjected to the examination of product test as described under 4.4.

4.3.2 Sampling plans and tests. Sample seats shall be selected at random from each lot on the same material order, in the quantities specified below, and subjected to all of the tests in 4.4, except that proof loads shall be applied instead of ultimate loads:

a. Two seats from each lot of 200 or fraction thereof.

b. Three seats from each lot of 500 or fraction thereof.

c. One seat from each additional 500 or fraction thereof above 500.

4.3.2.1 Rejection and retest. When one or more items from a lot fail the specified tests, this is cause for rejection of the lot. Before resubmitting the lot, the contractor shall fully explain to the inspector both the corrections made and the cause of previous rejections.

4.4 Test methods.

4.4.1 Examination of product. Each seat shall be carefully examined to determine conformance to this specification and pertinent drawings with respect to design, standard parts, finish, adjustments, dimensions, workmanship, material, weight and marking.

4.4.2 Functional tests. The sample seat shall be mounted in a suitable jig or fixture by utilizing the normal tie-down provisions. The seat shall then be subjected to and required to withstand without failure the following loads . The attitude of the seat during the test may be changed to facilitate testing if the direction of the loads with respect to the seat remains the same. The loads may be applied by means of hydraulic or pneumatic press, jacks, shot bags, or any other suitable method.

4.4.2.1 Seat bottom. The seat bottom of each type of seat shall withstand the loads as tabulated below. The loads shall be acting downward on and uniformly distributed over the seat bottom. If shot bags or other high density materials are used to load the type I and type II seats simultaneously, care shall be taken to avoid bridging by placing bags or materials in separate piles to represent an occupant.

Type	Ultimate Load (Pounds)	Proof Load (Pounds)
I	2,000	1,340
II	4,000	2,670

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:03Z
Check the source to verify that this is the current version before use.

4.4.2.2 Seat back. The seat back of each type of seat shall withstand the loads as tabulated below. The loads shall be acting rearward and uniformly distributed over the seat back.

Type	Ultimate Load (Pounds)	Proof Load (Pounds)
I	600	400
II	1,200	800

4.4.2.3 Side Load. Each type of seat shall withstand side loads as tabulated below. The side load shall act in line with the center line of the front seat tube which supports the front of the seat bottom.

Type	Ultimate Load (Pounds)	proof Load (Pounds)
I	225	150
11	450	300

4.4.2.4 Seat leg locking mechanism. Each seat leg locking mechanism shall support an up load of 1000 pounds ultimate and 670 pounds proof applied while the seat is erected in the testing jig or fixture.

4.4.2.5 Load procedure. The seat units shall be subjected to and required to withstand without permanent set the specified proof loads. The seat bottom loads and the seat side loads shall be applied simultaneously with the back support hanging loosely at ultimate load. During the back load test specified in 4.4.2.2 the seat back and seat bottom shall be adjusted until they are taut. In addition to the above listed tests, the type I and type II seats shall be joined at the seat back, seat bottom and front support tube, and the seat back and bottom loading procedures for the type I seat shall be applied directly over the joint between the seats in order to test the strength of the joint.

4.5 First Article Inspection.

4.5.1 First Article test sample tested by the contractor. The contractor shall subject one seat of each type to the first article test specified in 4.5.4.

* 4.5.2 First Article test report. After the contractor completes the first article tests, he shall prepare a first article test report according to MIL-STD-831 and furnish three complete copies of the report to the procuring activity.

4.5.3 First Article Inspection sample for the procuring activity. Along with the first article test report, the contractor shall submit a sample seat to the procuring activity.

4.5.4 First Article Inspection. First Article Inspection shall consist of all tests described under 4.4.

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

4.6 Inspection of the preservation, packaging, packing and marking for shipment and storage. Sample items or packs and the inspection of the preservation, packaging and marking for shipment and storage shall be in accordance with the requirements of Section 5, or the documents specified therein.

5. PACKAGING

* 5.1 Preservation. Preservation shall be Level A, or commercial as specified (see 6.2).

* 5.1.1 Level A. Each seat shall be preserved and packaged in accordance with MIL-P-116, Method III, in a container conforming to PPP-B-636, class weather resistant.

* 5.1.2 Commercial. The commercial preservation of seats shall be in accordance with the requirements of ASTM D 3951-82.

* 5.2 Packing. Packing shall be Level A, B or Commercial, as specified (see 6.2).

5.2.1 Level A. Seats preserved and packaged as specified in 5.1.1 shall be packed in overseas type shipping containers conforming to PPP-B-601 or PPP-B-621. As far as practicable, shipping containers shall be of uniform shape and size, of minimum cube and tare consistent with the protection required, and contain identical quantities. The gross weight of each shipping container shall not exceed the weight limitation of the specification. Containers shall be closed and strapped in accordance with the specification and appendix thereto.

5.2.2 Level B. Seats preserved and packaged as specified in 5.1.1 shall not be overboxed for domestic shipments. The unit container, closed and strapped in accordance with applicable appendix of the container specification shall be the shipping container.

5.2.3 Commercial. The preserved seats shall be packed in accordance with the requirements of ASTM D 3951-82.

5.3 Physical protection. Cushioning, blocking and bracing shall be in accordance with MIL-STD-1186, except that for domestic shipments, waterproofing requirements for cushioning materials and containers shall be waived when preservation, packaging and packing of the item is for immediate use or when drop tests of MIL-P-116 are applicable.

5.4 Marking.

5.4.1 Levels A and B. In addition to any special or other identification marking required by the contract (see 6.2), each unit pack and exterior shipping container shall be marked in accordance with MIL-STD-129.

5.4.2 Commercial. Commercial marking shall be in accordance with the requirements of ASTM D 3951-82.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:03Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The wall type seats covered by this specification are intended for use in cargo-type aircraft by troops and paratroopers.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. When a first article is required (see 3.1, 4.2, and 6.3).

c. Type of seat required (see 1.2).

d. Applicable levels of presentation, packaging, and packing required (see 5.1 and 5.2).

6.3 First article. When a first article is required, it shall be inspected and approved. The first article should be a preproduction sample. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was clone as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 99

Preparing Activity:
Air Force - 82

Project No. 1680-F521

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 6, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASH DC

POSTAGE WILL BE PAID BY HQ U.S. AIR FORCE

SA-ALC/MMEDO
Kelly AFB, TX 78241

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-27174B(USAF)	Seat Troop, Variable Seating Width

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:03Z
Check the source to verify that this is the current version before use.