MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 11743439 COMMANDERS CONTROL

This specification is approved for use by the Us Army Armament Research and Development command (ARRADCOM) and is available for use by all Departments and Agencies of the Department of Defenses

1. SCOPE

1.1 Scope. This specification establishes the requirements and quality assurance provisions for the Circuit Card Assembly: 11743439 Commanders Control which is the Al component of the Laser Ranging Commanderts Sight and Receiver-Transmitter Control Unit, 11743121.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materials: General Specification Specification Governing the Manufacture and Inspection of
MIL-I-45607	inspection Equipment; Acquisition, Maintenance and Disposition of
MIL-STD-45662	calibration System Requirements

FSC 1240

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:25Z
Check the source to verify that this is the currentversion before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	Environmental Test Methods

DRAWINGS

ARRADCOM

11743439	Circuit Card Assembly: Commanders Control

Inspection Equipment

11750202	Automatic Card and Unit Test Set
11750442	Adapter Computer Unit
11821457	Fixture Shock, Vertical and Horizontal Plane
11821458	Shock Adapter Plate Vib Horz-Vert Plane/Shock-Z
11821520	Automatic Test Assembly, Central processor Unit

Packaging Data Sheet

P11743439	Packaging of Circuit Card Assembly: 11743439 Commanders Control

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officero)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Fabrication. The commanders control circuit card assembly, herein referred to as the assembly, shall be manufactured in accordance with Drawing 11743439 and drawings pertaining thereto and, when assembled, shall meet the requirements of this specification. (See 4.5.1).

3.1.1 Functions. The assembly shall provide the following functions:

	Designation
a.	Continuity
b.	Lamp driver
c.	Readout selection logic
d.	Anode logic

3.1.2 General specifications. The following provisions of MIL-F-13926 apply: (See 4.5.1)

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship

3.1.3 Ambient conditions. Standard ambient conditions shall be as follows:

a. Temperature	730 + 18°F
b. Relative humidity	50 percent ±30 percent
c. Atmospheric pressure	28.5 + 2.0 -3.0 in. Hg.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.2).

3.3 Performance. Unless otherwise specified, the assembly shall meet the performance requirements herein under standard ambient conditions of 3.1.3.

3.3.1 Continuity. With no signals or power applied, direct continuity which is defined as resistance equal to or less than 2.0 ohms, shall exist between pins P1-l and P1-7, pins P1-15 and P1-18, and pins P1-11 and P1-12. (See 4.6.1.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

3.3.2 Lamp driver. With the load (item 1.1) of table I applied and with the digital type-B signal (item 3.2) of table I applied at the logical zero level, the output voltage between pins P1-19 and P1-7 shall be 13.0 ±1.0 volts direct current (Vdc). With the digital type-B signal applied at the logical one level, the voltage between pins P1-19 and P1-7 shall be 11.0 ±1.5 Vdc. (See 4.6.1.2)

TABLE 1. Loads, power and signals.

Item	Conditions	Characteristics	Connections
1.0	Loads		Connected between the following pins:
1.1	Resistor	3.9 kilohms ±5 percent, 1/2 watt	P1-19 and P1-7, when specified
1.2	Resistor	270 ohms ±5 percent, 1/4 watt	P1-24 and P1-11
2.0	Power sources		
2.1	5 Vdc	Tolerance: ±0.2 Vdc Ripple: 25 mV p-p max	Applied, unless otherwise specified, between pins P1-15 (+) and P1-7 (-)
2.2	14 Vdc	Tolerance: ±0.5 Vdc Ripple: 25 mV p-p max	Applied, unless otherwise specified, between pins P1-15 (+) and P1-7 (-)
3.0	Signal sources		
3.1	Digital type-A	Logical one: 4.0 ±1.0 V Source Impedance: 2 kilohms ± 5 percent Logical zero: 0.2 ±0.2 V	Applied as specified
3.2	Digital type-B	Logical one: open circuit Logical zero: 0.2 ±0.2 V	When specified applied between pins P1-5 and P1-7 (rtn)
3.3	Anode inputs		
3.3.1	Signals a, b, c, d and e	Pulse trains as specified on figure 1.	Applied as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Readout selection logic.

Item	Input conditions 1/, 2/ at pins				
	P1-20 3/ (Anode 1)	P1-22 3/ (Anode 2)	P1-21 3/ (Anode 3)	P1-17 3/ (Anode 4)	P1-4 3/ (Anode 5)
1.0	Signal	Signal	Signal	Signal	Signal
1.1	a	b	c	d	e
1.2	a	b	c	d	e
1.3	a	b	c	d	e
1.4	a	b	c	d	e
1.5	a	b	c	d	e
1.6	a	b	c	d	e
1.7	a	b	c	d	e
1.8	a	b	c	d	e
1.9	a	b	c	d	e
1.10	a	b	c	d	e
1.11	a	b	c	d	e
1.12	a	b	c	d	e
1.13	a	b	c	d	e
1.14	a	b	c	d	e
1.15	a	b	c	d	e
1.16	a	b	c	d	e

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Readout selection logic. - continued

Item	Input conditions 1/, 2/ at pins						
	P1-8 4/ (Data $\overline{8}$)	P1-9 4/ (Data $\overline{4}$)	P1-10 4/ (Data $\overline{2}$)	P1-23 4/ (Data $\overline{1}$)	P1-6 4/ (Blanking)	P1-5 5/ ($\overline{\text{LTC}}$)	P1-2 4/, 6/ ($\overline{\text{RBI}}$)
1.0							
1.1	NC	NC	NC	NC	0	0	X
1.2	0	0	0	0	0	0	1
1.3	0	0	0	0	0	1	X
1.4	1	0	0	0	1	0	X
1.5	1	0	0	0	0	0	X
1.6	1	0	0	1	0	0	X
1.7	0	1	1	1	0	0	X
1.8	0	1	1	0	0	0	X
1.9	0	1	0	1	0	0	X
1.10	0	1	0	0	0	0	X
1.11	0	0	1	1	0	0	X
1.12	0	0	1	0	0	0	X
1.13	0	0	0	1	0	0	X
1.14	0	0	0	0	0	0	1
1.15	0	0	0	0	0	0	0
1.16	1	0	1	0	0	0	X

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. Readout selection logic. - Continued

Item	Readouts display conditions 2/, 7/					Output condition at pin P1-24 1/, 8/
	Range					
	1000s	100s	10s	1s	Returns	$\overline{(LT)}$
1.0						
1.1	B	B	B	B	B	HI
1.2	0	0	0	0	0	HI
1.3	8	8	8	8	8	LO
1.4	B	B	B	B	B	HI
1.5	8	8	8	8	8	HI
1.6	9	9	9	9	9	HI
1.7	7	7	7	7	7	HI
1.8	6	6	6	6	6	HI
1.9	5	5	5	5	5	HI
1.10	4	4	4	4	4	HI
1.11	3	3	3	3	3	HI
1.12	2	2	2	2	2	HI
1.13	1	1	1	1	1	HI
1.14	0	0	0	0	0	HI
1.15	B	B	B	B	B	HI
1.16	B	B	B	B	B	HI

1/ Signal condition voltages are referenced to pin P1-7
2/ Input and output terminal legend:

LTC is Lamp test control, RBI is Ripple blanking input; LT is Lamp test.

3/ Input signal condition legend:
Signals a, b, c, d and e are anode input signals, item 3.3.1 of table I.

4/ Input signal condition legend:
a. NC = no connection
b. 1 = logical one digital type - A signal, item 3.1 of table I (4.0 ± 1.0)
c. 0 = logical zero digital type - A signal, item 3.1 of table I (0.2 ± 0.2)

5/ Input signal condition legend:
a. 1 = logical one digital type - B signal, item 3.2 of table I (open circuit)
b. 0 = logical zero digital type - B signal, item 3.2 of table I (0.2 ± 0.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

6/ Input signal condition legend:
X = logical one or logical zero digital type - A signal, item 3.1 of table I (4.0 ± 1.0 or 0.2 ± 0.2)
7/ Readouts display conditions legend:
a. B = blank - not illuminated
b. 0 = zero
8/ Output signal condition legend:
a. HI = 4.0 ± 1.0
b. LO= 0.2 ± 0.2

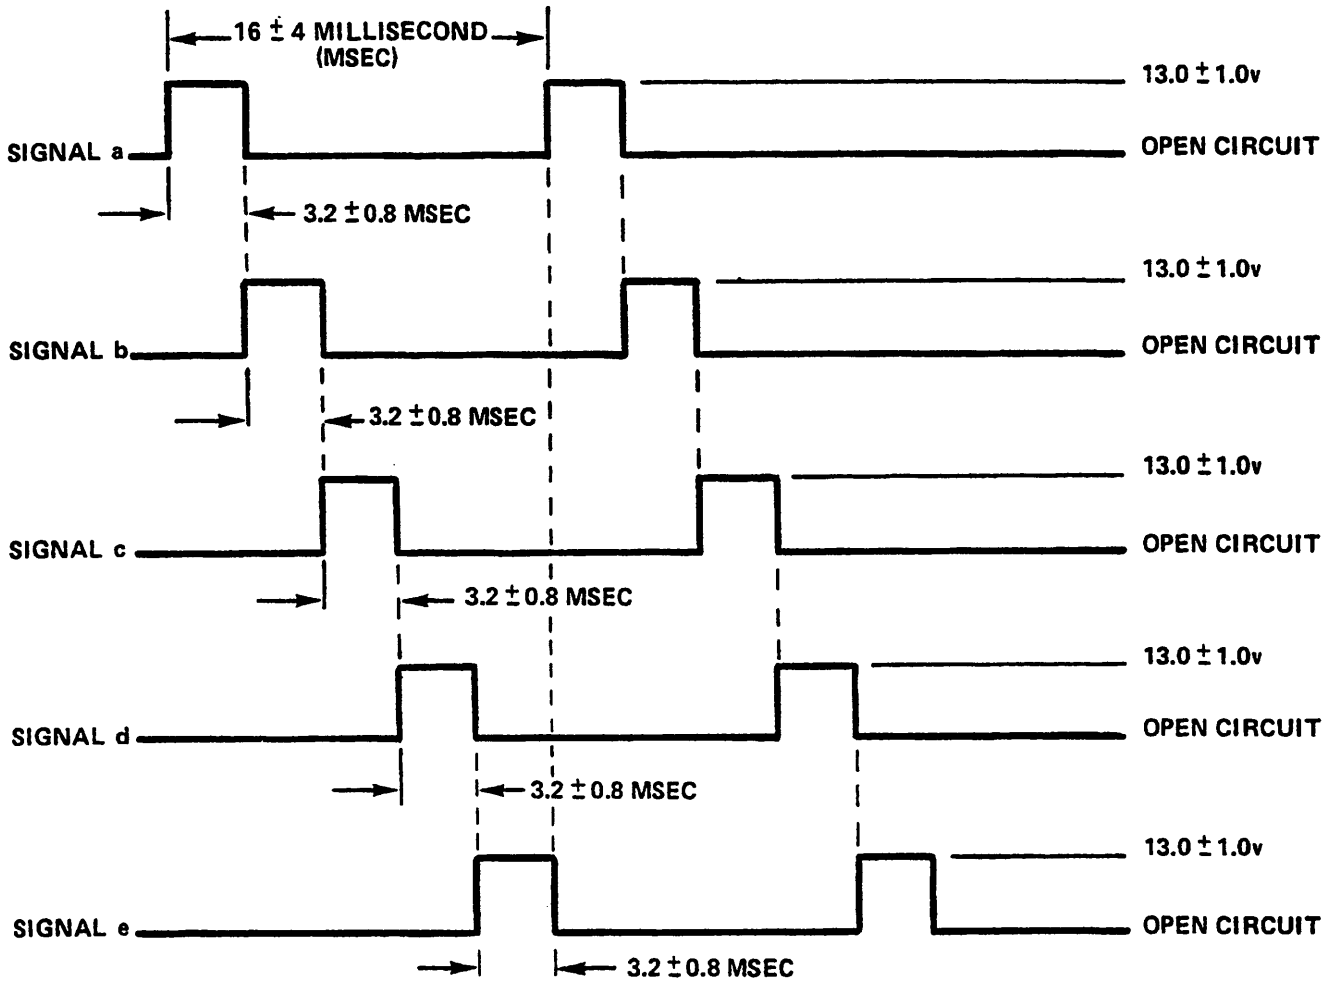


FIGURE 1. Anode input waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

3.3.3 Readout selection logic. With the table II items input conditions established in the item number order, the corresponding ordered readout display conditions shall be as specified therein. (See 4.6.1.3)

3.3.4 Anode logic. With the table III items input conditions established in the item number order, the corresponding ordered readout display conditions shall be as specified therein. (See 4.6.1.4)

TABLE III. Anode logic.

Item	Input conditions 1/, 2/at pins					
	P1-20 (Anode 1)	P1-22 (Anode 2)	P1-21 (Anode 3)	P1-17 (Anode 4)	P1-4 (Anode 5)	P1-5 4/ (LTC)
1	a	NC	NC	NC	NC	1
2	NC	b	NC	NC	NC	1
3	NC	NC	c	NC	NC	1
4	NC	NC	NC	d	NC	1
5	NC	NC	NC	NC	e	1

TABLE III. Anode logic. - Continued

Item	Readout display conditions 3/				
	Range				Returns
	1000s	100s	10s	1s	
1	B	B	B	B	8
2	B	B	B	8	B
3	B	B	8	B	B
4	B	8	B	B	B
5	8	B	B	B	B

1/ Input signal condition voltages are referenced to pin P1-7.
2/ Input signal condition legend:
a. Signals a, b, c, d and e are node input signals, item 3.1 of table I.
b. NC = no connection
c. O = logical zero digital type-a signal, item 3.1 of table 1.
3/ Readout display condtion legend: B = blank - not illuminated
4/ Input terminal legend: LTC is Lamp test control.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:25Z
Check the source to verify that this is the current version before use.

3.4 Environmental.

3.4.1 Shock. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to three half sine wave shock pulses of 20 ±3 gravity units (g) for a duration of 18 ± 3 milliseconds (msec) applied in each direction along three mutually perpendicular axes. In addition, the assembly shall be capable of withstanding three sawtooth shock pulses of 40 ± 4 g for a duration of 9 ± 1.5 msec applied in each direction along three mutually perpendicular axes. (See 4.6.3.1)

3.4.2 Vibration. The assembly shall be capable of operating as specified herein after exposure under the conditions of 3.1.3 to the vibration profile of figure 2. Duration of exposure shall be not less than 80 minutes in each of three mutually perpendicular axes. (See 4.6.3.2)

3.4.3 Operating temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to +125°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

3.4.4 Storage temperature. The assembly shall be capable of operating as specified herein after exposure to storage temperatures ranging from -65°F to +160°F. (See 4.6.3.3, 4.6.3.4 and 4.6.3.5)

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contracts the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproven by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements l

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified? all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

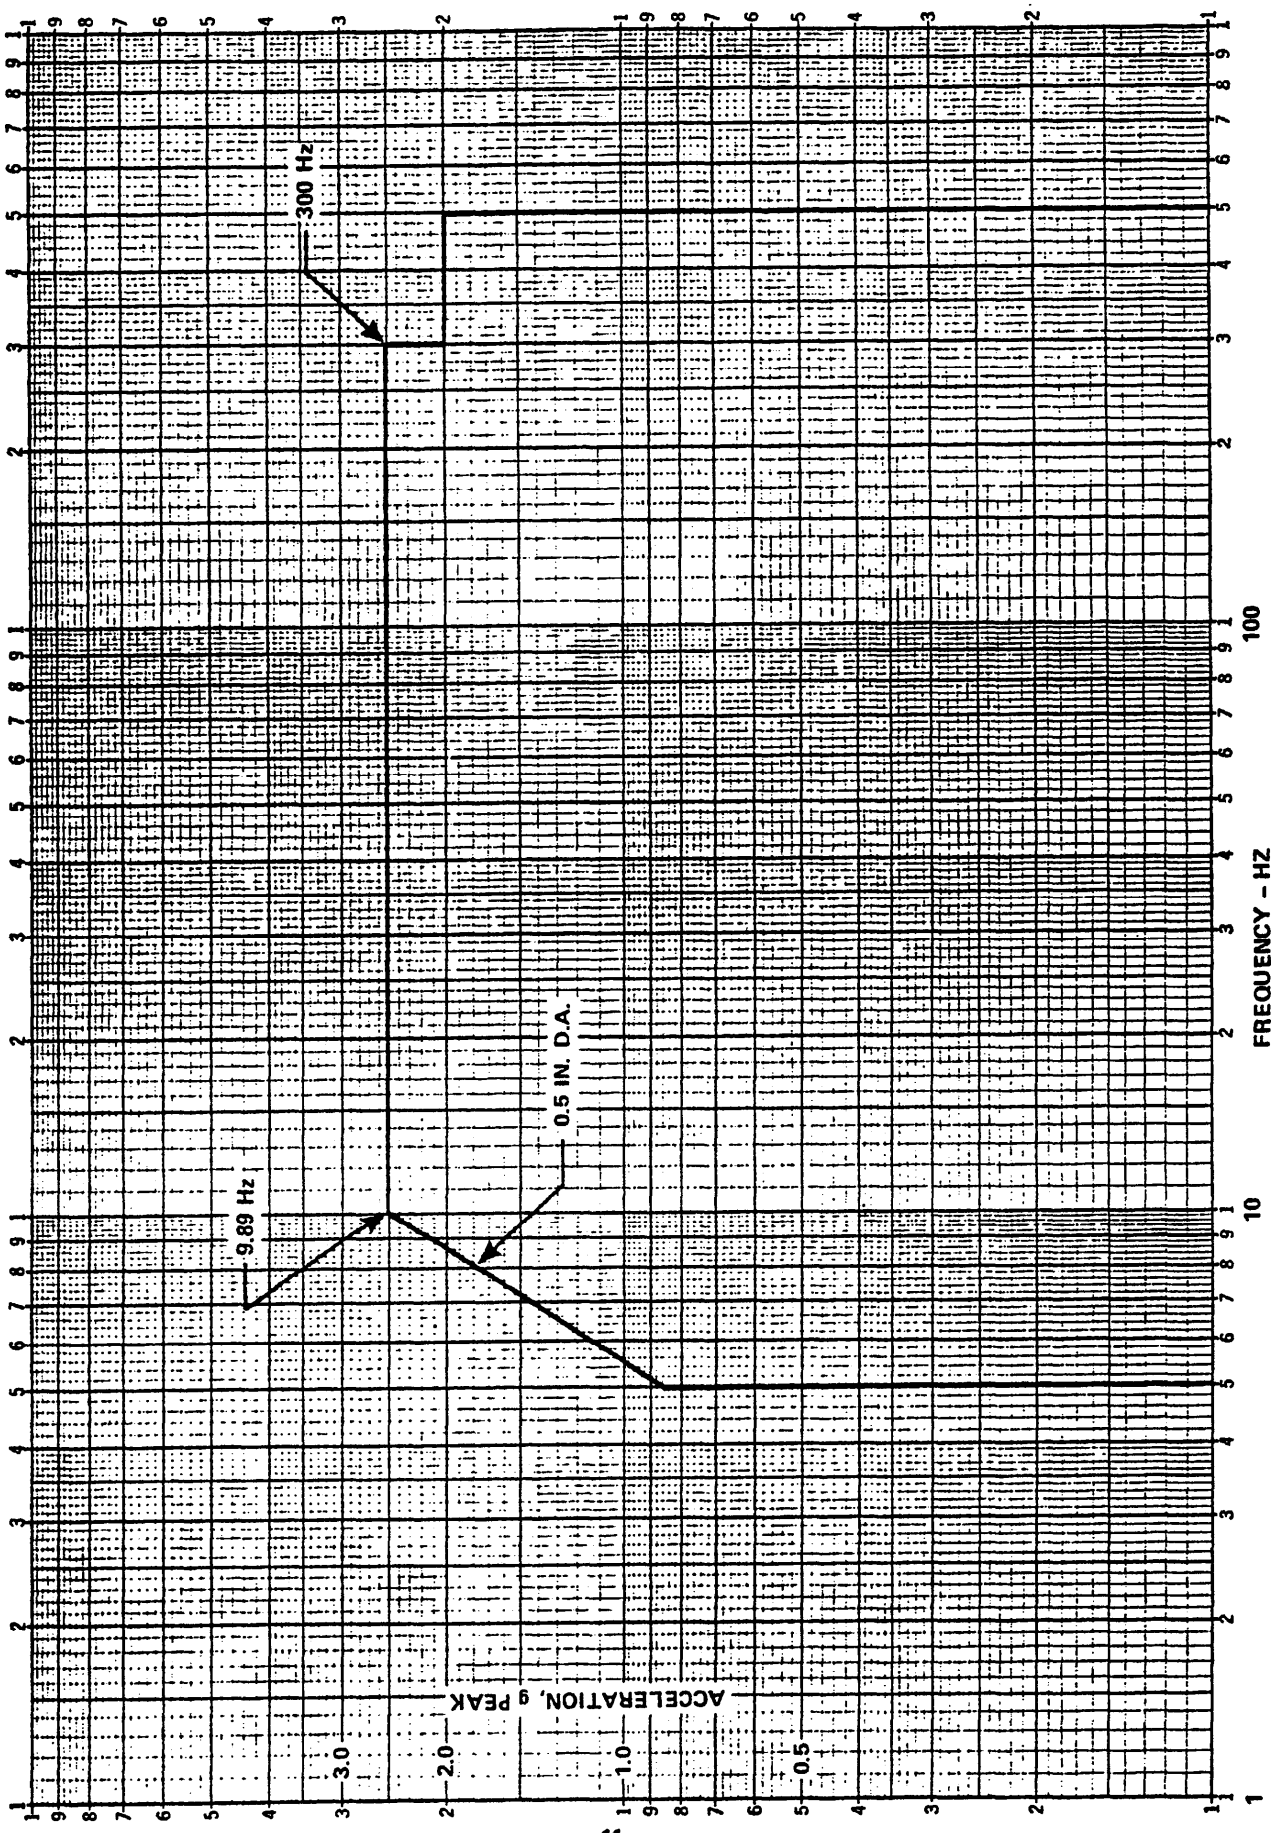


FIGURE 2. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.4 First article. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract.

4.4.1 Sample. The first article sample shall be three assemblies selected at random by the Government representative from the first fifteen production assemblies.

4.4.2 Inspection. The sample shall be subjected to all the inspections specified in tables IV, V and VI.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

TABLE IV. Performance Tests.

Item	Characteristic	Requirement	Test Procedure
101	Continuity	3.3.1	4.6.2.1
102	Lamp driver	3.3.2	4.6.2.2
103	Readout selection logic	3.3.3	4.6.2.3
104	Anode logic	3.3.4	4.6.2.4

TABLE V. General tests.

Item	Characteristic	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General specifications	3.1.2	MIL-F-13926 - Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE VI. Environmental tests.

Item	Characteristic	Requirement	Test Procedure
303	Shock	3.4.1	4.6.3.1
304	Vibration	3.4.2	4.6.3.2
305	High temperature	3.4.3 and 3.4.4	4.6.3.3
306	Low temperature	3.4.3 and 3.4.4	4.6.3.4
307	Temperature cycling	3.4.3 and 3.4.4	4.6.3.5

4.5 Quality conformance inspection.

4.5.1 Procurement conditions. The following inspection plans shall apply where the assembly is procured for use as a:

Use	Plan
a. Logistics spare assembly apart from the next higher assembly	A and C
b. Component assembly of the next higher assembly	B and C

4.5.2 Inspection plan A.

4.5.2.1 General sample and tests. One assembly, as a control samples shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to all the tests in the table V.

4.5.2.2 Environmental sample and tests. Three assemblies, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month's production, whichever occurs first. All the tests in table VI shall be applied separately to each assembly in the sample.

4.5.2.3 Acceptance. Where any one assembly of either sample fails to meet any specified requirement the lot shall be rejected. Rejected lots shall be subject to the provisions of MIL-STD-105.

4.5.3 Inspection plan B.

4.5.3.1 Sample and tests. The sample shall be selected by the Government representative in accordance with the provisions of MIL-STD-105. All the tests in table V and only the test of item 307 in table VI shall be applied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.5.3.2 Acceptance. Acceptance and rejection shall be in accordance with M1L-STD-105O

4.5.4 Inspection plan C.

4.5.4.1 Sample and tests. Each assembly in every lot shall be subjected to all the tests in table Iv and shall be examined visually for completeness improper assembly and evidence of poor workmanship.

4.5.4.2 Acceptnce. Where any one assembly fails to meet any specified requirement the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.5 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662.

4.5.6 Packaging inspection. The sampling and inspectio of the preservation - packaging, packing ad container marking shall be in accordance with the provisions of packaging data sheet P11743439.

4.6 Methods of inspection.

4.6.1 Test equipment. Unless the assembly is procued apart from the next higher assembly, the test equipment in table VII shall be used where specified to perform the required test.

TABLE VII. Test equipment.

Item	Part Number	Nomenclature
1	11750202	Automatic Card and Unit, Test Set
2	11750442	Adapter, Computer Unit
3	11821457	Fixture Shock, Vertical and Horizontal Plane
4	11821458	Shock Adapter, Plate Vib Horz-Vert Plane/ Shock - Z
5	11821520	Automatic Test Assembly, Central Processor Unit

4.6.2 Performance tests.

4.6.2.1 Continuity. Use items 1, 2 and 5 of table V1l or suitable equipment to determine compliance with 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:25Z
Check the source to verify that this is the current version before use.

4.6.2.2 Lamp driver. Use items 1, 2 and 5 of table VII or suitable equipment to determine compliance with 3.3.2.

4.6.1.3 Readout selection logic. Use items 1, 2 and 5 of table VII or suitable equipment to determine compliance with 3.3.3.

4.6.2.4 Anode logic. Use items 1, 2 and 5 of table VII or suitable equipment to determine compliance with 3.3.4.

4.6.3 Environmental tests.

4.6.3.1 Shock.

4.6.3.1.1 Basic design. Use items 3 and 4 of table VII or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810 method 516.2, procedure I, figure 516.2-2. Apply three half sine wave shock pulses in each direction along the three axes. Peak amplitude shall be 20 ± 3 g with a time duration of 18 ± 3 msec measured at the 10 percent amplitude points. At the conclusion of this test, subject the assembly to the performance tests of table IV.

4.6.3.1.2 High intensity. Use items 3 and 4 of table VII or mount the assembly in a suitable shock fixture and subject it to the shock test specified in MIL-STD-810 method 516.2 procedure IV, figure 516.2-1. Apply three sawtooth shock pulses in each direction along the three axes. Peak amplitude shall be 40 ± 4 g with a time duration of 9 ± 1.5 msec measured at the 10percent amplitude points. At the conclusion of this test subject the assembly to the performance tests of table IV.

4.6.3.2 Vibration. Vibration A as specified in 4.6.3.2.1 shall be conducted only for first article inspection. Vibration B as specified in 4.6.3.2.2 shall be conducted only for quality conformance inspection.

4.6.3.2.1 Vibration A. Use item 4 of table VII or mount the assembly in a suitable vibration fixture and subject the assembly to the vibration test specified in MIL-STD-810 method 514.2, procedure VIII, except that the test level shall be the vibration curve shown in figure 2 and duration of exposure shall be not less than 80 minutes per axis. At the conclusion of this test, subject the assembly to the performance tests of table IV.

4.6.3.2.2 Vibration B. This test shall be conducted as in 4.6.3.2.1 except that the period of vibration shall be not less than 15 minutes in each axis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

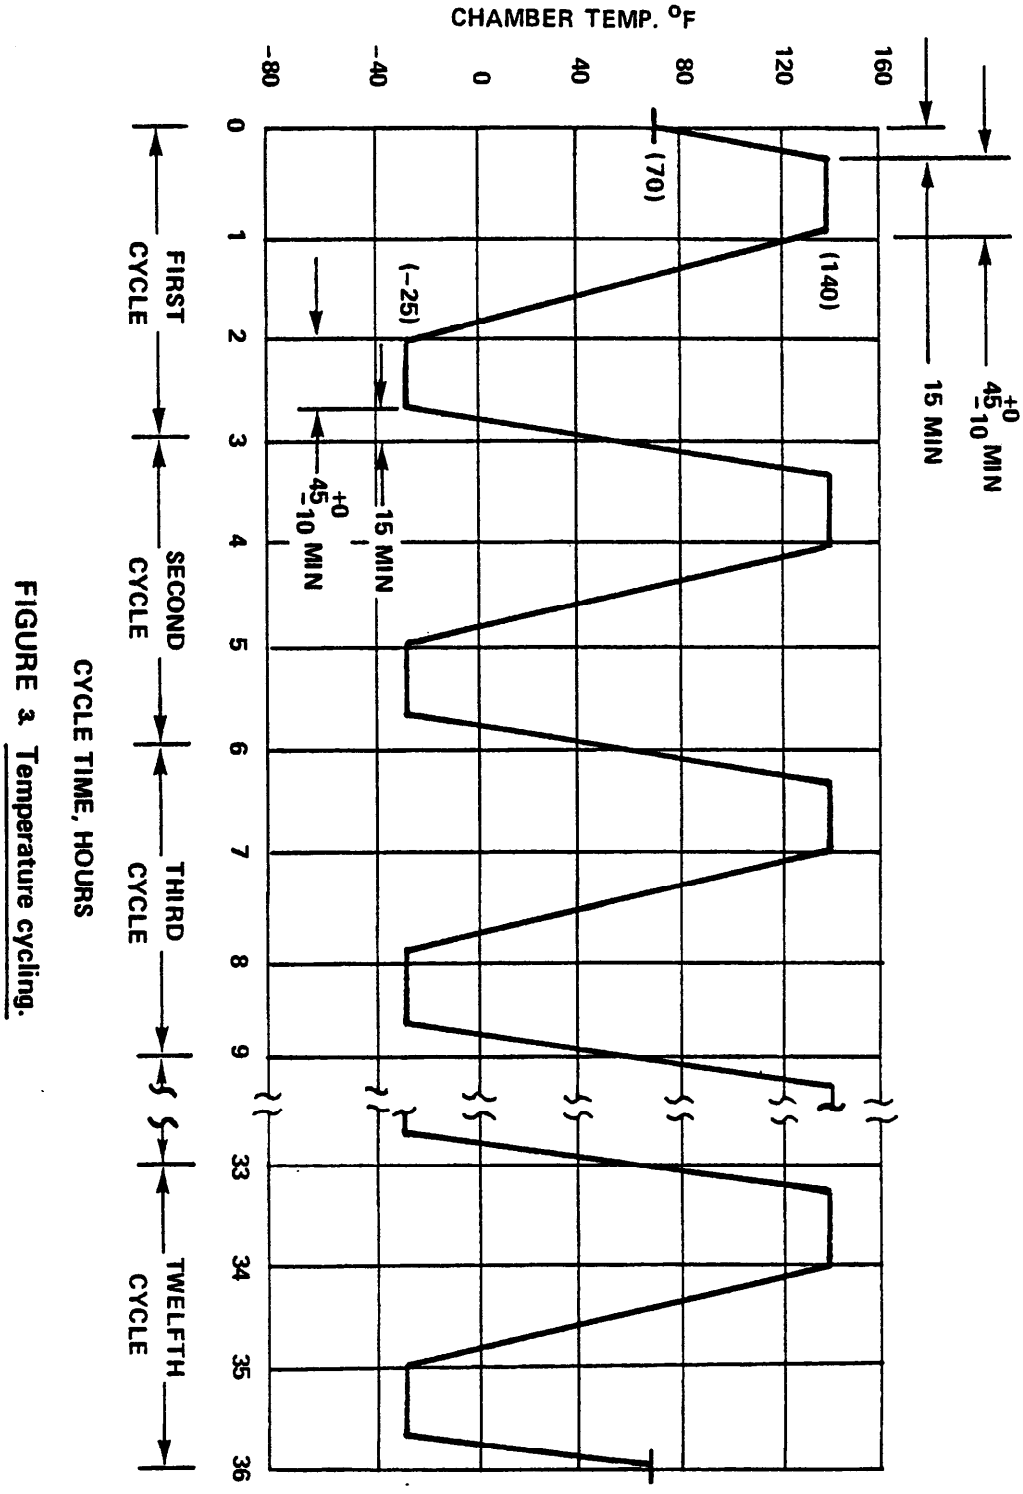


FIGURE 3. Temperature cycling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.6.3.3 High temperature. Subject the assembly to the high temperature test specified in MIL-STD-810, method 501.1, procedure I. The highest operating temperature shall be 125°F. The performance tests of table IV shall be applied.

4.6.3.4 Low temperature. Subject the assembly to the low temperature test specified in MIL-STD-81O, method 502.1, procedure I. The storage temperature shall be -65°F. The lowest operating temperature shall be -25°F. The performance tests of table IV shall be applied.

4.6.3.5 Temperature cycling. With power and loads of table I applied, subject the assembly to the temperature profile specified in figure 3. At the conclusion of this test, subject the assembly to the performance tests of table IV.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet P11743439. The level of protection shall be as specified in the procurement document. (See 4.5.6)

6. NOTES

6.1 Intended use. The Commanders Control Circuit Card Assembly is used for the display of range and returns for the Laser Fire Control Range Finder (AN/VVG-2).

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Special tests and examination as required, the type of inspection required, and the activity responsible for testing and its facility.

c. Applicable packaging data sheet number (See 5.1).

d. Selection of applicable levels of preservation, packaging, and packing:,

e. Applicable stock number.

f. First article inspection requirements.

6.3 Previous revisions of MIL-C-62202B was for the US Army Armament Research and Development command’s internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

custodian:
Army-AR

Preparing Activity:
Army-AR
Project 1240-A773

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-62202B CIRCUIT CARD ASSEMBLY: 11743439 COMMANDERS CONTROL

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN:: DRDAR-QAF
DOVER, NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

INCH-POUND

MIL-C-62202B(AR)
AMENDMENT 1
24 November 1993

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 11743439, COMMANDERS CONTROL

This amendment forms apart of MIL-C-62202B(AR), dated30 June 1981, and is approved for use by the U.S. Army Armament, Munitions, and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1, Drawings, under Inspection Eguipment, add: "(REF)" following each inspection equipment drawing.

PAGE 6

Table II, Item 1.16: Delete in its entirety and substitute:

*	1.16	1	0	1	0	1	0	x

PAGE 14

4.6.1: Delete in its entirety and substitute:

"4.6.1 Test equipment. The test equipment in table VII may be used where specified to perform the required test. If alternate test equipment is to be used, the contractor shall submit inspection equipment designs for review and approval in accordance with the terms of the contract (see 6.4)."

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:25Z
Check the source to verify that this is the current version before use.

PAGE 17

Add new paragraph 6.4 as follows:

"6.4 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander U.S. Army ARDEC, ATTN: SMCAR-QAF-1, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract DAta Requirements List, DD Form 1423 in the contract."

Custodian:
Army - AR

Preparing Activity:
Army - AR

(Project 1240-A972)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.