MILITARY SPECIFICATION

FUZE, PIBD, XM740, SECOND ENVIRONMENT SENSOR ELECTRONIC MODULE FOR

This specification is approved for use by the US Army Armament Research and Development Command and is available for use by all Departments and Agencies of the Department of Defense.

1.0 SCOPE

1.1 This specification establishes the requirements for the manufacture and acceptance of the Second Environment Sensor Electronics Assembly (SESE) critical item.

2.0 APPLICABLE DOCUMENTS

2.1 Government documents - Except as noted, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

PPP-T-97	Tape, Pressure Sensitive, Adhesive, Filament Reinforced

Military

MIL-B-81705	Barrier Materials, Flexible, Electrostatic-Free, Heat Sealable.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

FSC:1390

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn: DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-331	Fuze and Fuze Components, Environmental and Performance Tests For
MIL-STD-810	Environmental Test Methods

DRAWINGS

Army

9307285	Printed Wiring Board Assembly, Second Environment Sensor
9307286	Sensor Electronics Assembly, Second Environment
9303583	Standoff

Other Publications

AR700-15	Packaging of Material

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3.0 REQUIREMENTS

3.1 Item definition - The second environment sensor electronics assembly (SESE) is mounted within a projectile and is used in combination with two second environment sensors. The sensors are physically spaced a known distance apart, one aft of the other. The SESE, using the input from the two sensors, provides an electrical signal output. The signal is the second environment utilized in the arming sequence of the fuze system to assure the projectile has been safely launched. The forward sensor provides both start signal and power for the SESE. The aft sensor provides a second signal to the SESE as it exits from the gun tube. The time between the two sensor signals is used to detect projectile velocity and determine if the velocity ensures that a minimum arming distance will be achieved.

3.2 Characteristics

3.2.1 Performance

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

3.2.1.1 Output signals - The SESE shall provide either a "go" (arm) signal or a "no go" (not arm) signal, depending upon the condition and timing of the input signals. The #1 input signal will be a single pulse with a voltage rise from 0 to 16 volts in 80 +5, -0 microseconds and a decay to less than 10 volts at 100 ± 10 microseconds and will be applied to terminals 1 and 2 with terminal 1 positive and terminal 2 negative. The #2 input signal will be a single pulse with a voltage rise from 0 to 16 volts in 40 ± 5 microseconds and will be applied to terminals 3 and 4 with terminal 3 positive and terminal 4 negative. The "go" signal shall occur within 100 microseconds following the application of the #2 input signal.

3.2.1.1.1 Go output signal - A "go" signal shall be a pulse which changes from less than +0.2vdc to +4.0vdc minimum with the voltage maintained at greater than 4.0vdc for 0.7 seconds minimum. This signal shall be measured at terminals 6 and 5 with terminal 6 positive and terminal 5 negative. The "go" signal shall occur when input signal #1 is applied 180 microseconds or less prior to input signal #2.

3.2.1.1.2 No-go output signal - A "no-go" signal shall be a voltage of not greater than 0.2vdc. This signal shall be measured at terminals 6 and 5 with terminal 6 positive and terminal 5 negative. The "no-go" signal shall occur when the input signal #1 is applied 270 microseconds or more prior to input signal #2.

3.2.2 Environmental conditions - Except for temperature testing, these conditions apply with the SESE mounted in a projectile or a simulated projectile.

3.2.2.1 High temperature - The SESE shall meet the performance requirements specified in 3.2.1.1 when stabilized at temperatures up to 145°F.


3.2.2.2 Low temperature - The SESE shall meet the performance requirements specified in 3.2.1.1 when stabilized at temperatures down to -25°F.

3.2.2.3 Acceleration high g - The SESE shall meet the performance requirements specified in 3.2.1.1 following exposure to acceleration of 9000 +1500, −300 g's at temperatures from -25°F to 145°F. The direction of acceleration is shown in Figure 1. The acceleration time curve shall have no sharp discontinuities and shall remain above 8000 G's for at least 1.5 milliseconds.


3.2.2.4 Transportation vibration - The SESE shall meet the performance requirements specified in 3.2.1.1 following exposure to vibration levels at temperatures from -50°F to +160°F.

Frequency (Hz)	Level ± 10%
5-11	0.4 inch displacement, peak to peak
12-37	2.5 g acceleration, peak
38-52	0.036 inch displacement, peak to peak
53-500	5.0 g acceleration, peak

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

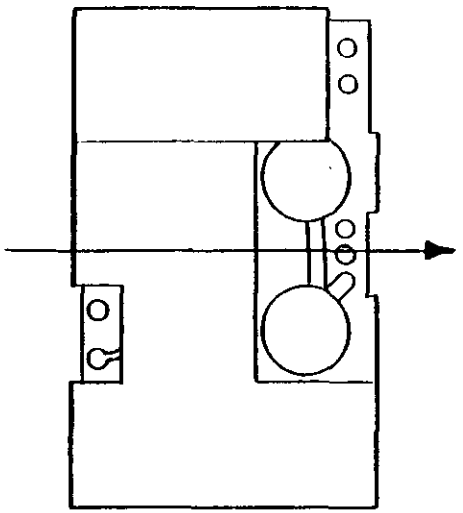

High g Acceleration

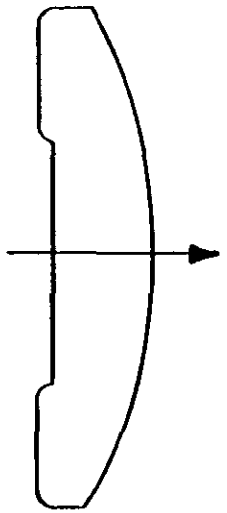

Lateral Acceleration

Figure 1 Direction of Applied Acceleration Forces

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

3.2.2.5 Humidity - The SESE shall meet the performance requirements specified in 3.2.1.1 following exposure to atmosphere with a relative humidity of 94 ± 4 percent over a temperature range of 68°F to 149°F.

3.2.2.6 Five-foot drop - The SESE shall meet the performance requirements specified in 3.2.1.1 following a drop of 5 feet onto a steel plate solidly supported by concrete.

3.2.2.7 Thermal shock - The SESE shall meet the performance requirements specified in 3.2.1.1 following thermal shock between -50°F and 160°F in a one minute period.

3.2.2.8 Lateral acceleration - The SESE shall meet the performance requirements specified in 3.2.1.1 following exposure to a shock load of 750 ± 50 g's for a period of less than one millisecond along the longitudinal axis of the SESE. The direction of the acceleration force shall be as shown in Figure 1.

3.3 Design and construction

3.3.1 Production drawings - The SESE shall be fabricated and assembled in accordance with the requirements specified on Drawing 9307286 and the applicable specifications referenced thereon.

3.3.2 Workmanship - All parts shall be fabricated and finished in a thorough workmanlike manner. Except as otherwise specified, the parts shall be free of cracks, scratches, burrs, dents, gouges, surface defects or any surface discontinuities. The items shall be free from dirt, chips, grease, corrosion, and other foreign material. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat and sharply defined. Exterior surface coatings shall be continuous except for voids not exceeding 0.25 inch wide, 0.25 inch long and 0.125 inch deep which do not expose components, circuitry, printed wiring board or side of the standoff.

3.4 First article inspection - This specification makes provision for the first article inspection. First article samples shall meet all the requirements of this specification. Requirements for submission of the first article samples by the contractor shall be specified in the contract.

4.0 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the procuring activity. The procuring activity reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection - The following types of inspections shall be conducted in this item:

(a) First article inspection (4.3)

(b) Quality conformance inspection (4.4)

4.3 First article inspection

4.3.1 Submission - The contractor, when required by contract, shall submit a first article sample of 20 assemblies, for examination and test by the procuring activity in accordance with Table I. The first article sample shall have been inspected in accordance with Table II. The contractor shall additionally submit 5 complete sets of parts and subassemblies as listed in "Classification of Defects and Tests," Table II. Environmental tests shall be conducted in the sequence indicated. Performance of each assembly shall be as indicated in each environmental test method. The testing shall be considered destructive and the tested assemblies shall not be returned to a lot for delivery. All assemblies and components shall have been produced by the contractor or furnished by a supplier using the same production processes, procedures, and equipment which will be used in fulfilling the contract. All parts and material shall be obtained from the same source(s) of supply as will be used in regular production. Prior to submission, the contractor shall inspect the sample to the degree necessary to ensure that it conforms to the requirements of the contract and submit a record of this inspection with the sample, including statements of findings for materials, processes, and tests. A sample containing known defects will not be submitted unless specifically authorized by the procuring activity. A first article sample, or portion thereof, as directed by the procuring activity, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days, or whenever a change occurs in manufacturing process, material used, drawing or specification, such as to significantly affect the product uniformity as determined by the procuring activity.

4.3.2 Inspections to be performed - First article test specimens may be subjected by the procuring activity to any or all of the examinations and tests specified in this specification and to any or all requirements of the applicable drawings.

4.3.3 First article rejection - If any test specimen fails to comply with any of the applicable requirements, the first article samples shall be rejected. The procuring activity reserves the right to terminate its inspection upon failure of any test specimen in the sample to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot - Unless otherwise specified herein or by the procuring activity, inspection lot size, lot formation, and presentation of lots shall be in accordance with the inspection and sampling procedures herein and the "submission of product" provisions of MIL-STD-105. Lot size shall be not greater than 1 month's production. Parts and subassemblies shall each be of one dash number of the same drawing number.

4.4.2 Inspections

4.4.2.1 Sampling inspection - Each lot of assemblies shall consist of hardware which has been inspected per Table II. Unless otherwise specified, sampling shall be to level II of MIL-STD-105. Lots failing to meet the requirements of Table II shall be rejected.

4.4.2.2 Lot acceptance testing - Each lot of assemblies shall be inspected in accordance with Table III. Sampling shall be to level S-3 of MIL-STD-105. Tests shall be conducted in the sequence shown except that the High and Low Temperature tests may be interchanged. The sample shall meet the requirements of Table III for acceptance of the lot. If the sample fails to meet these requirements the lot shall be rejected.

4.5 Test methods

4.5.1 Test conditions

4.5.1.1 Environmental conditions - Unless otherwise specified for the purpose of test, testing shall be conducted at the following conditions:

(a)	Temperature	$72^{\circ} \pm 18^{\circ}F$ ($22.2^{\circ} \pm 10^{\circ}C$)
(b)	Relative Humidity	90 percent maximum
(c)	Barometric Pressure	28 to 32 inches of mercury

4.5.1.2 Test tolerances - All tolerances specified herein are absolute with no allowance made for measuring equipment inaccuracy. Measurements shall ensure that the values measured are within the tolerances or limits specified.

4.5.1.3 Inspection equipment - The inspection equipments required to perform the examinations and tests prescribed herein are described in the "Paragraph Reference/Inspection Method" column in the inspection tables included herein. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6.4.

4.5.2 Performance - The SESE is an active electronic device and requires an outside power source. This source is the pulse(s) from the Second Environment Sensor (SES) in application or from test equipment simulating the pulse(s) during test. The SESE shall meet the requirements of 3.2.1 when tested as follows.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

4.5.2.1 Go signal output - With the #1 input signal defined by 3.2.1.1 applied to terminals 1 and 2 of the SESE with terminal 1 positive and terminal 2 negative; and the input signal #2 defined by 3.2.1.1 applied to terminals 3 and 4 of the SESE with terminal 3 positive and terminal 4 negative; and with signal input #2 delayed 180 microseconds or less after signal input #1; the output measured at terminals 5 and 6 with an instrument of 10 ± 2% megohm input impedance across a 1.1 ± 1% megohm resistor shall be as specified in 3.2.1.1.1.

4.5.2.2 No go signal output - With the #1 input signal defined by 3.2.1.1 applied to terminals 1 and 2 of the SESE with terminal 1 positive and terminal 2 negative; and the #2 input signal defined by 3.2.1.1 applied to terminals 3 and 4 of the SESE with terminal 3 positive and terminal 4 negative, and with signal input #2 delayed 270 microseconds or more after signal input #1; the output measured at terminals 5 and 6 with an instrument of 10 ± 2% megohm input impedance across a 1.1 ± 1% megohm resistor shall be as specified in 3.2.1.1.2.

4.5.3 Physical and dimensional characteristics - The physical and dimensional characteristics shall be inspected to the requirements of Drawing 9307286.

4.5.4 Workmanship - The SESE shall be examined to verify conformance with the workmanship requirements of 3.3.2.

4.5.5 Marking - The marking shall be as specified on Drawing 9307286.

4.5.6 Packaging and shipping - The packaging and preservation for shipping shall be inspected for compliance with the requirements of 5.0.

4.5.7 Environmental tests - With the exception of high and low temperature tests the SESE shall be mounted in a projectile or a test fixture simulating a projectile in its normal position by its normal mounting means.

4.5.7.1 High temperature - The SESE shall be conditioned at 145 ± 5°F for a minimum of one hour. The units shall be tested as specified in 4.5.2. The tests may be performed out of the temperature chamber if accomplished within one minute after removal from the chamber.

4.5.7.2 Low temperature - The SESE shall be conditioned at -25 ± 5°F for a minimum of one hour. The units shall be tested as specified in 4.5.2. The tests may be performed out of the temperature chamber if accomplished within one minute after removal from the chamber.

4.5.7.3 Acceleration high-g, high temperature - The SESE assembly shall be mounted in a carrier. The carrier/SESE assembly shall then be conditioned at 145 ± 5°F for a minimum of one hour. The carrier/SESE assembly shall be mounted in a test projectile or simulated projectile and subjected to the acceleration of 3.2.2.3 within 10 minutes after removal from the temperature chamber.

Remove the carrier/SESE assembly from the test projectile. Remove the SESE from the carrier and condition it at 145 +5°F, -0°F for one hour. Remove the unit from the temperature chamber and within 1 minute test as specified in 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

4.5.7.4 Acceleration high-g, low temperature - The SESE assembly shall be mounted in a carrier. The carrier/SESE assembly shall then be conditioned at -25 ± 5°F for a minimum of one hour. The carrier/SESE assembly shall be mounted in a test projectile or simulated projectile and subjected to the acceleration of 3.2.2.3 within 10 minutes after removal from the temperature chamber.

Remove the carrier/fuze assembly from the test projectile. Remove the SESE from the carrier and condition it at -25 ± 5°F for one hour. Remove the unit from the temperature chamber and within 1 minute test as specified in 4.5.2.

4.5.7.5 Transportation vibration

4.5.7.5.1 First article - The SESE shall be tested to the requirements as specified in MIL-STD-331, Test 119, Procedure 1, with the following exceptions:

(a) The cold temperature shall be -50°F rather than -65°F.

(b) The stabilization time shall be 1 hour rather than 4 hours.

Following vibration, the SESE shall be tested as specified in 4.5.7.1 and 4.5.7.2.

4.5.7.5.2 Lot acceptance - The SESE shall be tested to the requirements as specified in MIL-STD-331, Test 119, Procedure 2, except that the units shall be vibrated in each axis for 30 minutes with a sweep time of 15 minutes. Following vibration the SESE shall be tested as specified in 4.5.2.

4.5.7.6 Humidity - The SESE shall meet the requirements of 4.5.2 after being subjected to humidity in accordance with MIL-STD-810, Method 507.1, Procedure II.

4.5.7.7 Five-foot drop - The SESE shall meet the requirements of 4.5.2, after being subjected to a five foot drop at ambient conditions in accordance with MIL-STD-331, Test 111.1, Procedure 1, Criteria B. One SESE shall be dropped in each orientation and no SESE shall be subjected to more than one drop.

4.5.7.8 Thermal shock - The SESE shall meet the requirements of paragraph 4.5.2, after being subjected to temperature shock per MIL-STD-810, Method 503.1, with the following exceptions:

(a) The cold temperature in each cycle shall be -50 ± 2.5°F.

(b) The exposure time at each temperature in a cycle shall be one hour.

(c) The transfer time from one temperature to the other shall be less than one minute.

4.5.7.9 Lateral acceleration - The SESE shall meet the requirements of 4.5.2, after being exposed to a shock load of 750 ± 50 g's with a shock pulse of less than one millisecond. The direction of the applied acceleration force shall be as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

5.0 PREPARATION FOR DELIVERY

5.1 Preservation and packaging - Place each item in a non-conductive bag in accordance with MIL-B-81705, Type II and heat seal. Place the bagged items in a 275 pound test corrugated fiberboard carton having 0.050 inch solid fiber partitions with cell size of 2.5 inches by 1.5 inches by 1.0 inch high. Seal the carton with filament tape in accordance with PPP-T-97, Type IV. Preservation shall be in accordance with AR700-15, Level B.

5.2 Packing - Overpack the sealed cartons in quantities such that the gross weight will not exceed 65 pounds in 200 pound test corrugated boxes using anti-static cushion dunnage to ensure a light, secure pack. Seal the overpack with reinforced sealing tape.

5.3 Marking - The shipping boxes shall be marked in accordance with MIL-STD-129.

6.0 NOTES

6.1 Intended use - The item described by this specification is intended for use in the XM712 Projectile.

6.2 Ordering data - Procurement documents shall specify the following:

6.2.1 Procurement requirements

(a) Title, number and date of this specification.

(b) Quantity required and delivery schedules.

(c) Serialization requirements, if applicable.

(d) Quality Conformance Inspection, if other than specified in Section 4 of this specification.

(e) First Article Sample requirements, if other than specified in Section 4 of this specification.

(f) Packaging requirements, if other than specified in Section 5 of this specification.

(g) Certificates of conformance for each lot or shipment of product.

(h) Requirements for lot control.

6.2.2 Contract data requirements

(a) Contract data requirements for inspection equipment designs (conforming to Data Item Description DI-E-1118 or DI-R-1714 with appropriate addendum to each).

(b) Data Cards - When required by incorporation of DD Form 1423 into the contract, data cards shall be prepared for each lot in accordance with Data Item Description DI-L-1410, except that for propellant or explosive lots, Acceptance and Description Sheets will be prepared in accordance with MIL-STD-1171.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

6.3 Definitions

6.3.1 Contractor - Unless otherwise specified, the word contractor used throughout this specification shall mean any supplier or producer of items or material to the Government. This shall include commercial contractors, subcontractors, Government Owned, Contractor Operated (GOCO) plants.

6.3.2 Technical data package (TDP) - A technical description of an item adequate for use in procurement. The description defines the required design configuration and assures adequacy of item performance. It consists of all applicable technical data such as plans, drawings, and associated lists of specifications, standards, models, performance requirements, quality assurance provisions, and packaging data.

6.4 Inspection equipment design - Inspection equipment designs are of two types--Government Special Inspection Equipment (SIE) designs and contractor designs. SIE designs are designated by drawing numbers under the "Method of Inspection" heading in Section 4, or on the equipment lists referenced on the equipment tabulation, whichever is specified in the item detail specification. Design responsibility for all other inspection equipment is assigned to the contractor. The contractor need not furnish any design when a complete government SIE design is provided. Unless otherwise specified, however, the contractor may submit alternate or modified contractor designs of SIE in accordance with 6.4.2 and 6.4.3 should he elect to do so.

6.4.1 SIE designs - SIE designs may consist of any of the following:

(a) Detailed drawings which completely depict all information necessary for the fabrication and use of the item of inspection equipment.

(b) A source control drawing or a specification control drawing as defined in MIL-STD-100.

(c) An envelope drawing, as defined in MIL-STD-100, which establishes the criteria which a detailed design shall meet. When envelope drawings are specified, the contractor shall prepare designs which comply with the criteria therein.

6.4.2 Contractor design - Contractor designs are required for all inspection equipment for which SIE designs are not specified and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by the general public). Contractor designs shall include appropriate operation instructions, calibration procedures and maintenance procedures. Commercial equipment shall be fully described by catalog listings or other means which provide sufficient information to permit identification and evaluation by the Government and may include illustrations and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial equipment, or with SIE designs if not otherwise covered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

6.4.3 Submission of designs for approval - Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Designs shall be submitted for approval in accordance with the stipulations, time frame and distribution specified in the Contract Data Requirements Lists (DD Form 1423). Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

TABLE I
FIRST ARTICLE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title Electronics Assembly, Second Environment Sensor	Sheet 1 of 3		Drawing Number 9307286
				Next Higher Assembly 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
Critical	None defined			
Major				
101	Mounting surface profile	100%	Dwg.	Gage
102	Go signal output	100%	3.2.1.1.1	4.5.2.1
103	Go signal initiation	100%	3.2.1.1.1	4.5.2.2
104	No go signal output	100%	3.2.1.1.2	4.5.2.3
105	No go signal initiation	100%	3.2.1.1.2	4.5.2.4
106	Standoff thread (2) (pitch dia.)	100%	Dwg. 9303583	
107	Standoff location (2)	100%	Dwg. 9307285	
Minor				
201	Workmanship	100%	3.3.2	4.5.4

Notes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

TABLE I
FIRST ARTICLE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title: Electronics Assembly Second Environment Sensor	Sheet 2 of 3		Drawing Number 9307286
				Next Higher Assembly 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
	GROUP I - 10 SESE ASSEMBLIES			
Critical	None defined			
Major				
108	Performance	100%	3.2.1	4.5.2
109	Thermal shock	100%	3.2.2.7	4.5.7.8
110	Lateral acceleration	100%	3.2.2.8	4.5.7.9
111	Five foot drop	100%	3.2.2.6	4.5.7.7
112	High temperature*	100%	3.2.2.1	4.5.7.1
113	Low temperature*	100%	3.2.2.2	4.5.7.2
Minor	None defined			

Notes:
* Five units at each temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

TABLE I
FIRST ARTICLE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title: Electronics Assembly Second Environment Sensor	Sheet 3 of 3		Drawing Number: 9307286
				Next Higher Assembly: 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
	GROUP II - 10 SESE ASSEMBLIES			
Critical	None defined			
Major				
114	Performance	100%	3.2.1	4.5.2
115	Humidity	100%	3.2.2.5	4.5.7.6
116	Transportation vibration	100%	3.2.2.4	4.5.7.5.1
118	Acceleration high-g*		3.2.2.3	
	High temperature	100%	--	4.5.7.3
	Low temperature	100%	--	4.5.7.4
Minor	None defined			

Notes:
* Five units at each temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

TABLE II
CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title	Sheet 1 of 2		Drawing Number
	Electronics Assembly, Second Environment Sensor			9307286
				Next Higher Assembly
Category	Examination or Test	AQL Or 100%	Require-ment Paragraph	9308000
				Paragraph Reference / Inspection Method
Critical	None defined			
Major				
101	Mounting surface profile	0.40%	Dwg.	Gage
102	Go signal output	100%	3.2.1.1.1	4.5.2.1
103	Go signal initiation	100%	3.2.1.1.1	4.5.2.2
104	No go signal output	100%	3.2.1.1.2	4.5.2.3
105	No go signal initiation	100%	3.2.1.1.2	4.5.2.4
106	Standoff thread (2) (pitch dia.)	0.40%	Dwg. 9303583	Gage
107	Standoff location	0.40%	Dwg. 9307285	Gage
Minor				
201	Workmanship	0.65%	3.3.2	4.5.4

Notes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

TABLE II
CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title: Printed Wiring Board, Assembly Second Environment Sensor	Sheet 2 of 2		Drawing Number: 9307285
				Next Higher Assembly: 9307286
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
Critical	None defined			
Major				
101	Standoff location (2)	0.40%	Dwg.	Gage
102	Conformal coating	0.40%	Dwg.	Visual
Minor	Workmanship	0.65%	3.3.2	4.5.4

Notes:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

TABLE III
LOT ACCEPTANCE TESTS
CLASSIFICATION OF DEFECTS & TESTS

Paragraph	Title Electronics Assembly Second Environment Sensor	Sheet 1 of 1		Drawing Number 9307286
				Next Higher Assembly 9308000
Category	Examination or Test	AQL Or 100%	Requirement Paragraph	Paragraph Reference Inspection Method
Critical	None defined			
Major				
101	Thermal shock	1.0%	3.2.2.7	4.5.7.8
102	Transportation vibration	1.0%	3.2.2.4	4.5.7.5.2
103	High temperature	1.0%	3.2.2.1	4.5.7.1
104	Low temperature	1.0%	3.2.2.2	4.5.7.2
Minor	None defined			
Notes:				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

CUSTODIAN
ARMY-AR

PREPARING ACTIVITY
ARMY-AR

PROJECT NUMBER;1320-A207

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-P-63231 FUZE,PIBD, XM740, Second Enviroment Sensor Electronic

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

Module For

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.