MILITARY SPECIFICATION

NETWORK, PULSE FORMING: 11740288

This specification is approved for use by the US Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the pulse forming network (PFN) board assembly. This network provides the charge and discharge path which is used to form the modulator output pulse. The board assembly is an integral assembly in the klystron power supply, a part of the AN/VPS-2 Radar Set.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	-	Fire Control Material: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	-	Parts, Equipment and Tools for Army Materiel; Packaging and Packing of
MIL-S-19500	-	Semiconductor Devices, General Specification for
MIL-C-46357	-	Computer, Gun Direction; M18 Manufacturing Processes and Inspection of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn: AMSMC-QA, Dover, New Jersey 07801-5001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1285

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-454	-	Standard General Requirements for Electronic Equipment
MIL-STD-810	-	Environmental Test Methods

2.1.2 Other Government documents, drawings and publications. The following Government drawings form a part of this specification to the extent specified herein.

DRAWINGS (See 6.4)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER (ARDC)

D10548200	-	Reactor, Charging
D10548201	-	Transformer, Pulse
C10548248	-	Diode
C10548901	-	Board Assembly
C11736110	-	Diode Assembly
C11740288	-	Board Assembly
C9183C3012	-	Transistor, SCR

PACKAGING DATA SHEET

11740288	-	Packaging of Pulse Forming Network

(Copies of specifications, standards, drawings and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the reference cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Fabrication. The board assembly shall be manufactured in accordance with Drawing C11740288 and drawings pertaining thereto. The subassemblies of the (PFN board) shall have been inspected and accepted in accordance with their respective drawings or specifications prior to their installation into the (PFN board).

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:32Z
Check the source to verify that this is the current version before use.

3.2 General specifications. Where applicable, the board assembly shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

3.2.1 MIL-F-13926.

a. Dimensions and tolerances.

b. Inorganic protective surface finishings.

c. Part identification and marking.

d. Workmanship.

e. Soldering electrical connections.

3.2.2 MIL-C-46357.

a. Etched circuit assembly.

b. Wiring.

c. Threaded fasteners.

d. Marking.

e. Finishes.

3.3 Environmental service conditions.

3.3.1 Vibration. The board assembly shall meet the requirements of 3.4 and 3.5 after being subjected to continuous vibration for two hours along each of three mutually perpendicular axes within the frequency range and amplitude as follows:

Frequency Range (Hz ± 2 Percent)	Excursion (double amplitude) (inches ± 10 percent)
5 to 15	0.06 inch
15 to 25	0.04 inch
25 to 55	0.02 inch

The rate of change of frequency at each frequency range shall not exceed one cycle per second per second (1 cps/sec). Vibration tests shall be conducted under ambient room conditions.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:32Z
Check the source to verify that this is the current version before use.

3.3.2 Shock. The board assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The shock impulses shall have an acceleration of 15 gravity units (G's) and a pulse duration of 11 ±1 milliseconds (ms). The G value of each impulse shall be within ±10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5.5 ms.

3.3.3 Altitude.

3.3.3.1 Operating. The board assembly shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

3.3.3.2 Non-operating. The board assembly shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure enountered at 40,000 feet above sea level (5.5 inches Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The board assembly shall meet the requirements of 3.4 and 3.5 during exposure at any temperature between -40°F and +155°F and after it is thermally stablized at both low and high ambient temperature extremes.

3.3.4.2 Non-operating (storage). The board assembly shall not suffer permanent damage when subjected to the constant temperature extremes of -60°F for a period of 24 hours and +160°F for a period of 48 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The board assembly shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the pulse forming network board assembly.

3.5 Performance. When supplied with the inputs specified in Table I, the board assembly shall yield the outputs specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:32Z
Check the source to verify that this is the currentversion before use.

TABLE I. Input and output characteristics.

REQUIREMENT	CHARACTERISTICS	TERMINALS
Input power	-285 ±1 Vdc, dc regulated, capacity 300 mA.	E1(-), E2 (RET)
Input signals	-525 $^{+0}_{-45}$ V pulse, pulse width 25 ±5 us, PRF 20 kHz	L7-1
Output signals	CAUTION: The output pulse present during the test is extremely dangerous.	
Output pulse	See Figure 3. Amplitude, 5.0 kV minimum. Width 0.6 us minimum at 4.3 kV points; rise time 0.4 us maximum at 4.3 kV points; delay from main trigger, 0.67 us maximum from 50% main trigger point with respect to the 4.3 kV point.	E5 (Test fixture item 7 of Table V).

3.6 First article. Unless otherwise specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.7 Workmanship. The requirements of MIL-STD-454 and other applicable specifications shall apply.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be listed in MIL-STD-109.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:32Z
Check the source to verify that this is the current version before use.

4.2 First article (initial production) submission. The requirement for first article approval and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three board assemblies manufactured in the same manner, using the same materials, equipment processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product. Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassembies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provision (SQAP) listed in the technical data package (TDP). In the absence of SQAP's, the applicable quality assurance provisions of MIL-F-13926 and MIL-S-19500 shall apply.

4.3.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in 4.3.2.3 and 4.4 herein. Examination and test for packaging and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in 4.3.2.3 and 4.4 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:32Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects
(100 percent inspection)

Test	Requirement	Test Procedures
CRITICAL: NONE		
MAJOR:		
101. Electrical	3.4	4.6.2
102. Performance	3.5	4.6.3
MINOR: NONE		

4.3.3 Rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling. One board assembly shall be selected at random by a Government representative as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table III. Three board assemblies shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control samples shall meet the requirements and tests in Table IV.

TABLE III. Special sampling.

Control Test	Requirement	Test Procedures
301. Fabrication	3.1	Applicable Drawings/ Visual
302. General specifications	3.2	MIL-F-13926 & MIL-C-46357/Visual

TABLE IV. Special sampling, environmental.

Characteristic	Requirement	Test Procedures
303. Vibration	3.3.1	4.6.1.1
304. Shock	3.3.2	4.6.1.2
305. Altitude	3.3.3	4.6.1.3
306. Temperature	3.3.4	4.6.1.4
307. Humidity (nonoperating)	3.3.5	4.6.1.5

4.4.1 Failure of sample. Failure of a special sample will be cause for rejection of the lot represented. Acceptance of the material will be withheld until failure analysis/corrective action has been completed and is acceptable to the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:32Z
Check the source to verify that this is the currentversion before use.

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of the Technical Data Package (TDP).

4.5.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of the TDP.

4.5.2 Contractor-furnished inspection equipment.

4.5.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

4.5.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of inspection" specified in 4.6 and with the Component Inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.3 Test equipment. In conjunction with 4.5.2, the standard test equipment listed in Table V shall be utilized in performing the applicable test of 4.6.

TABLE V. Test equipment list.

Item number	Description
1. Power Supply	Dc, 300 vdc at 500 mA, regulated 0.1%.
2. Voltmeter	Dc, 0 to 300 Vdc, accuracy of 0.1%, 20,000/V.
3. Oscilloscope	Input sensitivity: 10mV/division. Input impedance: 1 megohm. Vertical passband: dc to 50 MHz. Horizontal deflection: 20 ns/division.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

4.	HV probe	Attenuation: 1000x. Input resistance: 100 megohms. Input capacity: 2.7 PF. Probe rise time: 12 ns. Voltage rating: 20kV rms.
5.	Pulse generator	Repetition rate: 10 Hz to 10MHz. External trigger: 0.25 to 5.0 Vdc average. Pulse operation: gated and single. Pulse delay: 30 ns to 10 ms, 70% duty cycle. Pulse width: 30 ns to 10 mV, 70% duty cycle. Pulse output: 10 V into 50-ohm rise and fall time, typical 5 ns.
6.	Pulse generator	Same as item 5.
7.	Test fixture	As specified in Figure 1; see Table VI for parts list.

4.6 Methods of inspection.

4.6.1 Environmental. Environmental tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

4.6.1.1 Vibration. The board assembly shall be mounted on the vibration table in normal service position. The test shall be performed as specified in Method 514, Procedure I, Category I, of MIL-STD-810 as modified by paragraph 3.3.1 herein. After vibration, the board assembly shall be tested as given in 4.6.2 and 4.6.3 for compliance with 3.3.1.

4.6.1.2 Shock. This test shall be performed as specified in Procedure I Method 516 of MIL-STD-810 except that shock pulses shall be as 11 $\pm$ 1 ms and 15'g. The G value of each impulse shall be within $\pm$10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5.5 milliseconds. After the shock impulses, the board assembly shall be tested as specified in 4.6.2 and 4.6.3 for compliance with 3.3.2.

4.6.1.3 Altitude (nonoperating and operating). This test shall be performed as specified in Procedures II and III, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.6.3 for compliance with 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:32Z
Check the source to verify that this is the current version before use.

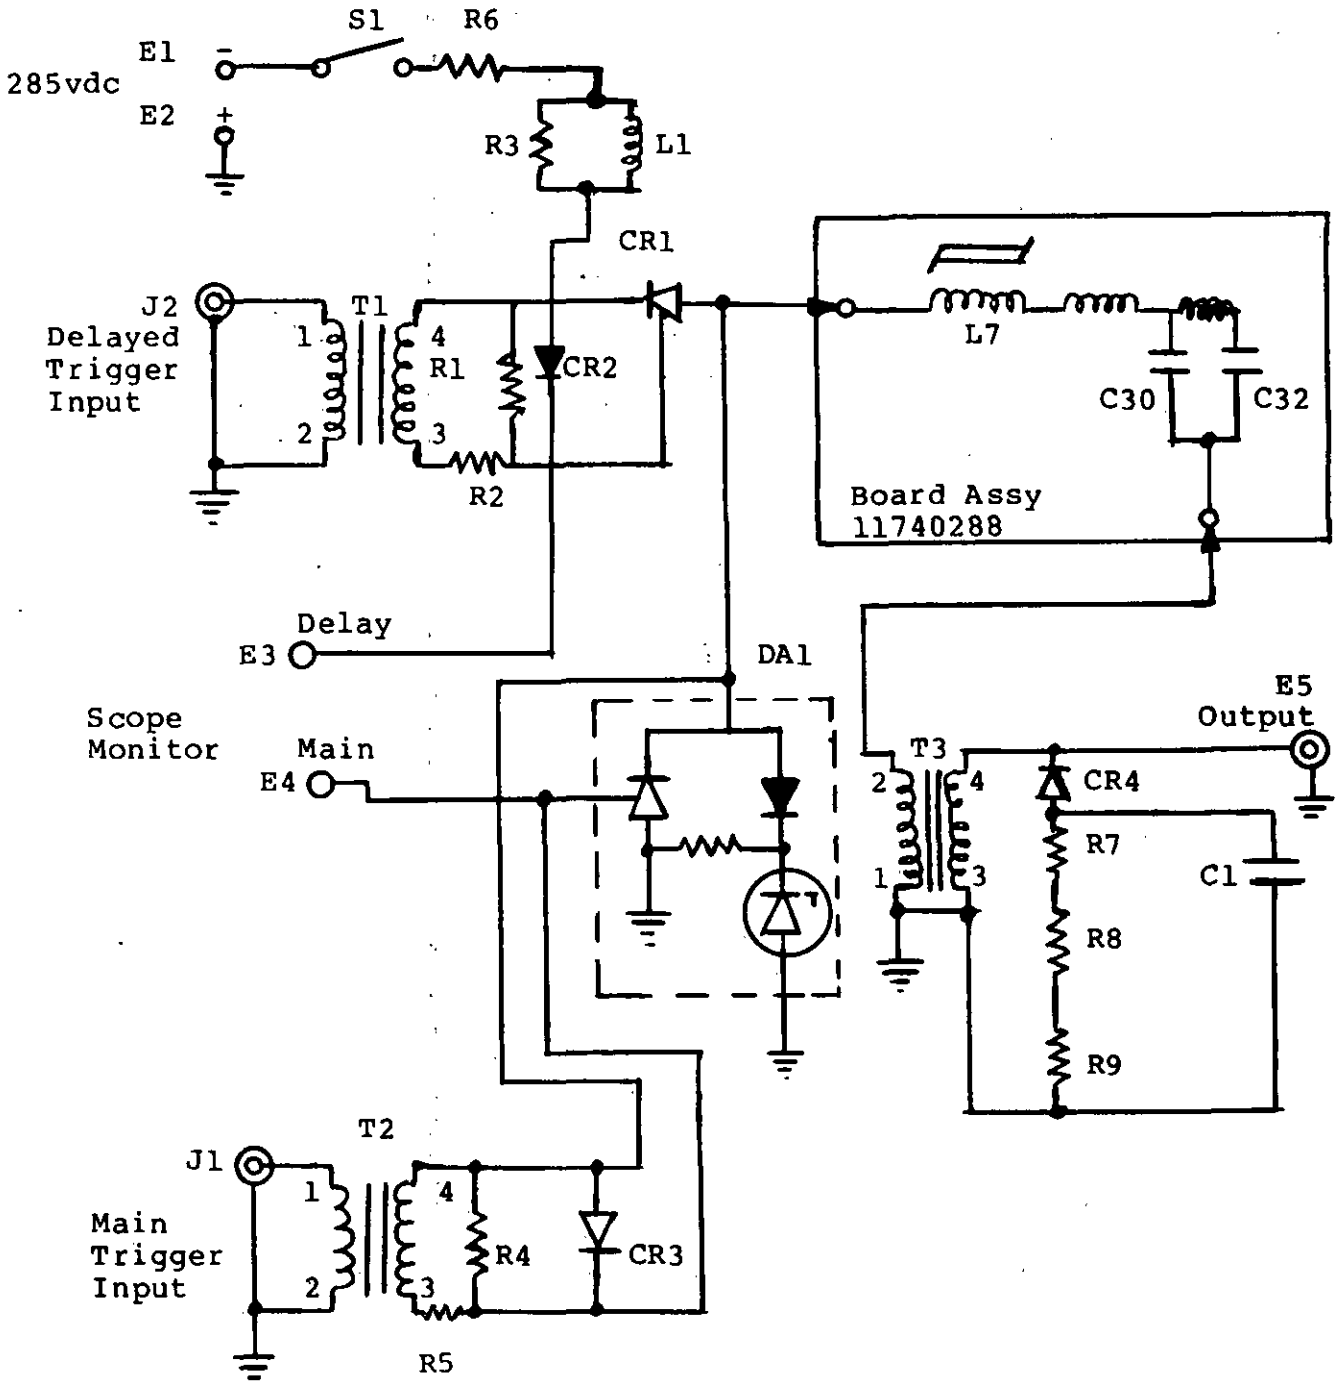


FIGURE 1. Test fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

TABLE VI. Test fixture parts list.

Designation	Nomenclature and Description
C1	Capacitor, CM07F103J03
CR1	SCR, 9183C3012
CR2, CR3	Diode, JAN 1N914/MIL-S-19500
CR4	Diode, 10548248
DA1	Diode assembly, 11736110
E1	Binding post, E.F. Johnson 111-102 red.
E2	Binding post, E.F. Johnson 111-103 black.
E3, E4	Binding post, E.F. Johnson 111-104 green.
E5	Meter jack, high voltage (10,000 Vdc).
J1, J2	Connector, UG625/U BNC.
L1	Reactor, charging, 10548200.
R1, R4	Resistor, RL07S510J.
R2, R5	Resistor, RC20GF100K.
R3	Resistor, RLR32C822JM.
R6	Resistor, 100 ohms, 20W, 10%.
R7, R8, R9	Resistor, RW56V751.
S1	Switch, SPST, general purpose, 300 V rated.
T1, T2	Transformer, pulse 10548201.
T3	Board assembly, 10548901.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and nonoperating). This test shall be performed as specified in Procedure I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.6.2 and 4.6.3 for compliance with 3.5.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:32Z
Check the source to verify that this is the currentversion before use.

4.6.1.4.2 Low (operating and nonoperating). This test shall be performed as specified in Procedure I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.6.2 and 4.6.3 for compliance with 3.5.

4.6.1.5 Humidity (nonoperating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the end of the tenth cycle (day) only, at standard ambient conditions.

4.6.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4.

4.6.3 Performance. The selected board assemblies shall be tested as follows: connect the test equipment listed in Table V as shown in Figure 2. Adjust power supply, item 1, to deliver the output voltage described in Table I. Connect the pulse generators, item 5 and item 6, to the oscilloscope, item 3. Adjust the pulse generator output to obtain the following signals.

Item 5:	amplitude	+10V
	width	1.2 us
	PRF	20kHz
Item 6:	amplitude	+10V
	delayed width	1.3 us
	delay	22 us from item 5

4.6.3.1 Connect pulse generators, items 5 and 6, to the test fixture, item 7: J1 to item 5 and J2 to item 6.

4.6.3.2 Connect the HV probe, item 4, from channel 1 of the oscilloscope, item 3 to the test fixture, item 7, E5 output jack.

4.6.3.3 Connect channel 2 of the oscilloscope, item 3, to terminal E4 scope monitor on test fixture, item 7. Adjust the oscilloscope to the following settings:

Channel 1	Gain	0.1 V/cm
Channel 2	Gain	10 V/cm
Horizontal time		0.2 us/cm
Mode		alternate

4.6.3.4 Apply power and energize S1 on test fixture, item 7.


CAUTION: The -285 Vdc and the 5000 V pulses present during this test are extremely dangerous.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

4.6.3.5 Observe the scope display for the presence of an output pulse and verify that the parameters are in accordance with Table I and Figure 3.

4.6.3.6 Allow the board assembly to "burn in" for 5 minutes and verify that the output waveshape has no major change from Figure 3.

4.6.3.7 Turn switch S1 on test fixture, item 7 off and on several times at 20-second intervals and verify that the output pulse is present immediately on the oscilloscope display every time switch S1 is turned on.

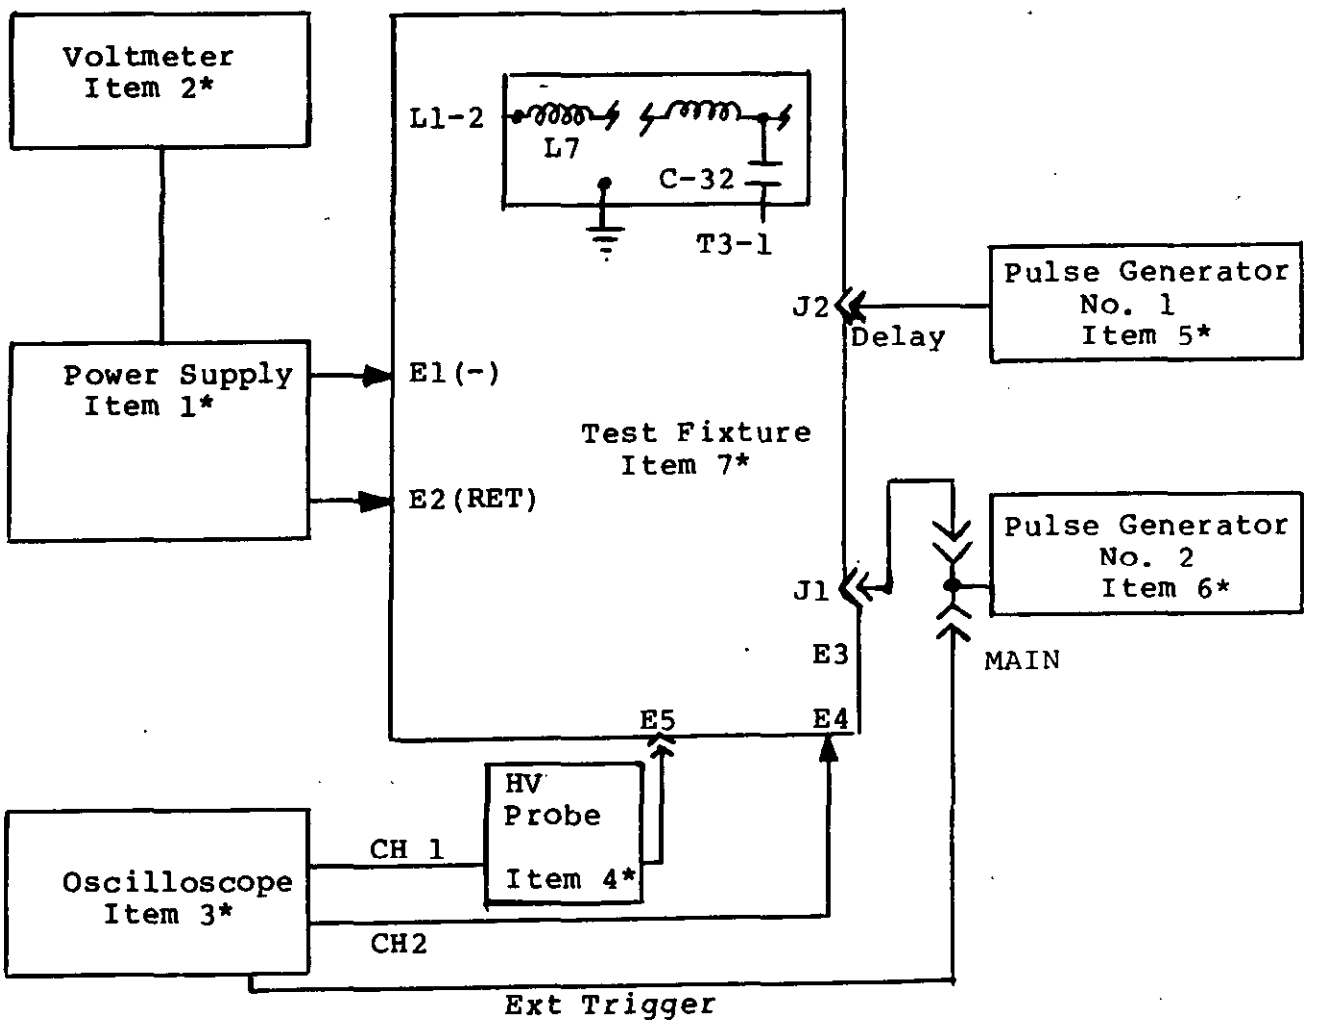

*Refer to 4.5.3

FIGURE 2. Test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:32Z
Check the source to verify that this is the current version before use.

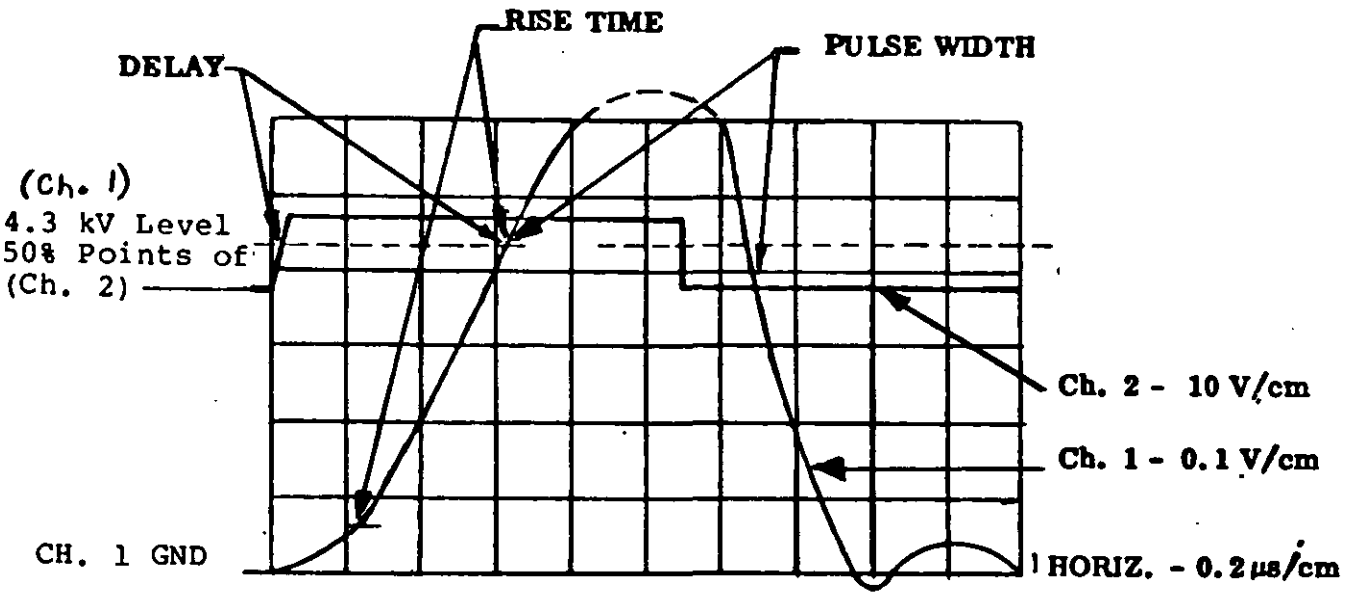


FIGURE 3. Output pulse requirements.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:32Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 11740288. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use. The PFN pulse forming network board assembly is used as an integral assembly, a part of the klystron power supply. The inductors and capacitors are charged during the radar transmit interpulse period and then discharged rapidly to produce the modulator output pulses. The modulator trigger generated by the synchronizing system, determines the time at which the PFN is discharged.

6.2 Ordering data. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this and the item detail specifications.

b. Applicable stock number.

c. A block of serial numbers to identify each test set.

d. Quality Conformance Inspection, if other than specified in Section 4 of item detail specification.

e. First Article Sample requirements, if other than specified in Section 4 of item detail specification.

f. Packaging requirements, if other than specified in Section 5 of item detail specification.

g. Certificate of conformance for each lot or shipment or product.

6.2.2 Contract data requirements.

a. Contract data requirements for inspection equipment designs conforming to Data Item Description DI-R-1714, tailored, with the appropriate addendum to each. See 6.3

b. Data Cards. When required by incorporation of DD Form 1423 into the contract, data cards shall be prepared for each lot in accordance with Data Item Description DI-L-1410.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

6.3 Submission of designs for approval. Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Designs shall be submitted for approval in accordance with the stipulations, timeframe and distribution specified in the Contract Data Requirements Lists (DD Form 1423). Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract. Submit designs as required to: Commander, US Army Armament Research and Development Center, ATTN: AMSMC-QAF-I(D), Dover, NJ 07801-5001.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Center (ARDC) may also include drawings prepared by and identified as US Army Armament Research and Development Command (ARRADCOM), Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal. Technical data originally prepared by these activities is now under the cognizance of ARDC.

6.5 Changes to previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity
Army-AR

(Project 1285-A567)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT RESEARCH & DEVELOPMENT CENTER
ATTN. SMCAR-QA
DOVER, NJ 07801 5001

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-N-50654A	NETWORK, PULSE FORMING: 11740288

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.