MILITARY SPECIFICATION

LENS ASSEMBLY, EYEPIECE, AN/PVS-4 AND AN/TVS-5

This specification is approved for use by USAERADCOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the Lens Assembly, Eyepiece, AN/PVS-4 and AN/TVS-5 (see 6.1), which is referred to herein as the eyepiece lens.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or requests for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin
NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
QQ-S-781	- Strapping, Steel, and Seals
PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-585	- Boxes, Wood, Wirebound
PPP-B-601	- Boxes, Wood, Cleated-Plywood
PPP-B-621	- Boxes, Wood, Nailed and Lock Corner
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall
PPP-C-1797	- Cushioning Material, Resilient, Low Density, Unicellular, Polypropylene Foam
PPP-S-760	- Strapping, Nonmetallic (and Connectors)
PPP-T-97	- Tape, Packaging/Industrial, Filament Reinforced

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Hq, USA Electronics Research and Development Command, ATTN: DRDEL-E, 2800 Powder Mill Road, Adelphi, MD 20783) by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/1299

FSC 5855

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of
MIL-B-117	- Bags, Sleeves and Tubing - Interior Packaging
MIL-P-11268	- Parts, Materials, and Processes Used in Electronic Equipment
MIL-M-13231	- Marking of Electronic Items
MIL-P-14232	- Parts, Equipment and Tools for Army Materiel, Packaging of

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipping and Storage
MIL-STD-147	- Palletized and Containerized Unit Loads, 40 Inch x 48 Inch Pallets, Skids, Runners, or Pallet-Type Base
MIL-STD-150	- Photographic Lenses
MIL-STD-202	- Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-781	- Reliability Tests: Exponential Distribution
MIL-STD-810	- Environmental Test Methods
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment

DRAWINGS

ELECTRONICS COMMAND

DL-SM-B-850401	- Lens Assembly,Eyepiece, AN/PVS-4 and AN/TVS-5

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The Lens Assembly, Eyepiece is part of the Night Vision Sight, Individual Served Weapon, AN/PVS-4 and Night Vision Sight, Crew Served Weapon, AN/TVS-5.

3.2 First article. When specified in the contract or purchase order, the contractor shall furnish first article eyepiece lenses in accordance with 4.3.

3.3 Construction. The eyepiece lens shall be constructed in accordance with DL-SM-B-850401 and all provisions of this specification as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

3.4 Material. Material shall be as specified herein and as shown on the applicable drawings. Material not specified shall be selected by the contractor, shall be subject to all provisions of this specification and shall conform to MIL-P-11268.

3.5 Components. The eyepiece lens shall consist of optical components assembled within a housing as specified herein.

3.6 Performance characteristics.

3.6.1 Equivalent focal length. The equivalent focal length of the eyepiece lens shall be 26.5, ±0.3 mm.

3.6.2 Flange focal distance. The flange focal distance of the eyepiece at zero diopter shall be 4.42, ±0.10 mm.

3.6.3 Field flatness. The field flatness of the eyepiece lens shall deviate no more than ±1/4 diopter over the full 25 mm flat format.

3.6.4 Linear distortion. The linear distortion of the eyepiece lens shall be between 0 and 9 percent pincushion distortion at the edge of the 25 mm format.

3.6.5 Exit pupil. The exit pupil diameter shall be 5.0, ±0.2 mm at an eye relief of 28.0, ±0.5 mm.

3.6.6 Transmission. The transmission of the eyepiece shall be not less than 80 percent over the full eyepiece aperture for the spectral output of the P-20 phosphor.

3.6.7 Modulation transfer function. The modulation transfer function (MTF) of the eyepiece lens shall not be less than that specified in figure 1.

3.6.8 Diopter adjustment. The diopter adjustment shall operate smoothly without binding throughout its complete range of movement at all operating temperatures specified herein. Dynamic torque shall be between 2 and 20 inch-pounds.

3.6.9 Diopter range. The eyepiece focus range shall not be less than 9 diopters when one rotational stop is set at -6, (+1/4 -0) diopters.

3.7 Environmental.

3.7.1 Vibration. The eyepiece lens shall not be damaged (see 6.3) by simple harmonic motion having an amplitude of 0.015 inch, (0.03 inch total excursion) with the frequency being varied between 10 and 55 hertz (Hz).

3.7.2 High temperature storage and operation. The eyepiece lens shall not be damaged by storage in any temperature from +23° to +68°C and shall operate as specified herein at any temperature from +23° to +52°C.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:04Z
Check the source to verify that this is the current version before use.

3.7.3 Low temperature storage and operation. The eyepiece lens shall not be damaged by storage at any temperature from +23° to -62°C and shall operate as specified herein at any temperature from +23° to -54°C.

3.7.4 Altitude. The eyepiece lens shall not be damaged when operated at a pressure equivalent to 10,000 feet altitude above sea level.

3.7.5 Temperature shock. The eyepiece lens shall not be damaged after being subjected to temperature changes between +23° and +68°C in 5 minutes and between +23° and -62°C in 5 minutes.

3.7.6 Humidity. The eyepiece lens shall not be damaged when operated in an atmosphere with relative humidity of 95, ±5 percent over a temperature range of +27° to +54°C and shall not be damaged after storage up to +65°C minimum with 95, ±5 percent relative humidity.

3.7.7 Immersion. The eyepiece lens shall not be damaged after being immersed in fresh water to a depth of not less than 3 feet for a period of not less than 30 minutes.

3.7.8 High intensity shock. The eyepiece lens shall not be damaged by a sequence of shocks applied in each direction along each of 3 mutually perpendicular axes (horizontal, vertical, and optical axis when the reticle pattern is erect). The shocks shall be half sine pulses and shall have a time duration of 4 milliseconds, ±5 percent. Shock pulses applied along the axes horizontal and perpendicular to the optical axis shall have a peak amplitude of 50 g's, ±15 percent (see 6.3). Shock pulses applied along the other 2 axes shall have a peak amplitude of 100, ±15 g's.

3.8 Reliability. The eyepiece lens shall have a Mean Time Between Failure (MTBF) of not less than 1000 hours when operated under the reliability test conditions specified herein.

3.9 Marking. Unless otherwise specified, the eyepiece lens and all components shall be marked per MIL-M-13231.

3.10 Workmanship. Unless otherwise specified, workmanship of the eyepiece lens shall conform to Requirement 9, MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

4.1.1 Components and materials inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined and tested in accordance with referenced specifications and standards as specified herein.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. First article inspection (4.3).
b. Quality conformance inspection (4.5).
c. Packaging inspection (4.9).

4.3 First article inspection.

4.3.1 Inspection. Each first article eyepiece component shall be inspected in accordance with table I. Presence of one or more defects shall be cause for rejection of that sight.

TABLE I. Inspections.

Defects	Requirement paragraph	In process
101. Performance requirements specified in notes appearing on drawings.	3.3	X
102. Linear or diametral tolerances of 0.002 inch or less.	3.3	X
103. Angular dimension having a tolerance of 15 minutes of arc or less.	3.3	X
104. Machine finishes of 32 micro-inches RMS or finer.	3.3	X
105. Tolerances of position or form 0.002 inch or less.	3.3	X
106. Screw thread Class 3 or better.	3.3	X
107. Load requirements for springs.	3.3	X
108. Lubrication requirements including dry lubricant finishes.	3.3	X
109. Material hardness when specified on drawings	3.3	X
110. Diopter control moves freely without binding	3.6.8.1	X

4.3.2 Tests. Following successful completion of the inspections specified in 4.3.1, each first article eyepiece lens shall be subjected to all inspections in table II. Failure of any inspection shall be cause for rejection of that eyepiece lens. Inspections may be performed in any order.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:04Z
Check the source to verify that this is the current version before use.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test paragraph
Equivalent focal length	3.6.1	4.6.1
Flange focal distance	3.6.2	4.6.2
Field flatness	3.6.3	4.6.3
Linear distortion	3.6.4	4.6.4
Exit pupil	3.6.5	4.6.5
Transmission	3.6.6	4.6.6
Modulation transfer function	3.6.7	4.6.7
Diopter adjustment	3.6.8	4.6.8
Diopter range	3.6.9	4.6.9
Vibration	3.7.1	4.7.1
High temperature storage and operation	3.7.2	4.7.2
Low temperature storage and operation	3.7.3	4.7.3
Altitude	3.7.4	4.7.4
Temperature shock	3.7.5	4.7.5
Humidity	3.7.6	4.7.6
Immersion	3.7.7	4.7.7
High intensity shock	3.7.8	4.7.8
Reliability	3.8	4.8

4.4 Inspection conditions. Unless otherwise specified in the contract or purchase order, inspections shall be performed as specified herein. Tolerances on specified illumination levels shall be ±10 percent. Neutral density filters used in test equipment shall have transmission characteristics within 10 percent of the nominal filter transmission from 0.35 to 1.0 micrometer. When a collimator is used, equivalent focal length (EFL) of the collimator shall be at least six times the EFL of the eyepiece lens under test. The clear aperture of the collimator shall be six inches or greater. Tolerance on 2854 K color temperature shall be ±200 K. References within environmental requirements and tests to "initial measurements", "operate", "pretest", or "performance check during test" shall be defined as the modulation transfer function test.

4.5 Quality conformance inspection.

4.5.1 Group A inspection. During manufacturing, the inprocess inspections of table I shall be performed. Sampling shall be in accordance with MIL-STD-105, Inspection Level II, combined AQL one percent defective. Following completion of the inspections of table I, each eyepiece lens that has passed the inspections, shall be inspected per table III. Failure of any eyepiece lens to pass all the tests of table III shall be cause for rejection of that eyepiece lens. Component tests of table III may be performed prior to assembly of eyepiece lenses for the examination of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

TABLE III. Group A Inspection.

Inspection	Requirement paragraph	Test paragraph
Exit pupil	3.6.5	4.6.5
Transmission	3.6.6	4.6.6
Modulation transfer function	3.6.7	4.6.7

4.5.2 Group B inspection. Eyepiece lenses which have passed the inspections specified in 4.5.1 shall be formed into lots (see 6.3). Sample eyepiece lenses shall be selected and subjected to the inspection of table IV. Sampling shall be in accordance with MIL-STD-105, combined AQL of 1.5 percent for the group, inspection level II. Inspections shall be performed in the order listed.

TABLE IV. Group B inspection.

Inspection	Requirement paragraph	Test paragraph
Equivalent focal length	3.6.1	4.6.1
Flange focal distance	3.6.2	4.6.2
Field flatness	3.6.3	4.6.3
Linear distortion	3.6.4	4.6.4
Diopter adjustment	3.6.8	4.6.8
Diopter range	3.6.9	4.6.9

4.5.3 Group C inspection. Group C inspections shall be conducted on eyepiece lenses selected from lots which have passed the inspections in 4.5.2. The sample(s) shall be subjected to the inspections specified in table V. Samples shall be selected in accordance with 4.5.3.1. Inspections may be performed in any order except that in Subgroup 1, immersion shall be last, and in Subgroup 2, humidity shall be last.

TABLE V. Group C inspection.

Inspection	Requirement paragraph	Test paragraph
Subgroup 1		
Vibration	3.7.1	4.7.1
High temperature storage and operation	3.7.2	4.7.2
Low temperature storage and operation	3.7.3	4.7.3
Immersion	3.7.7	4.7.7
Subgroup 2		
High intensity shock	3.7.8	4.7.8
Temperature shock	3.7.5	4.7.5
Humidity	3.7.6	4.7.6
Altitude	3.7.4	4.7.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

4.5.3.1 Sampling for group C inspection.

Subgroup 1: For this subgroup, 3 eyepiece lenses shall be randomly selected and shall be subjected to the group C, Subgroup 1 inspection specified in table V. The sample shall be selected from the total quantity in lots passing group B inspection each 30 days or from each 100 eyepiece lenses in lots passing group B inspection, whichever occurs first. The first samples selected shall be at the start of the contract from the first quality conformance inspection lot.

Subgroup 2: For this subgroup, 1 eyepiece lens shall be randomly selected from the first quality conformance inspection lot to pass group B inspection. For subsequent group C, Subgroup 2 inspections, 1 eyepiece lens shall be randomly selected every third month from the inspection lots passing group B inspection that month.

4.5.4 Group C failures. Actions required relative to group C failures shall be as specified in the contract or purchase order (see 6.2).

4.5.5 Disposition of group C inspection units. Any eyepiece lenses which have been subjected to group C inspection shall be subjected (after refurbishment if necessary) to the test of tables III and IV prior to acceptance. Failure of any test of tables III and IV shall be cause to reject that eyepiece lens.

4.5.6 Group D inspection. Group D inspection shall be conducted on eyepiece lenses selected from units which have passed the inspection in 4.5.1. Tests shall be conducted in accordance with table VI.

4.5.6.1 Sampling for group D inspection. The acceptance tests shall be performed on the first production lot and every other month, or 100 eyepiece lenses, thereafter, whichever occurs first. Sample size shall be 10.

TABLE VI. Group D Inspection.

Inspection	Requirement paragraph	Test paragraph
Reliability	3.8	4.8

4.5.6.2 Group D failures. Actions required relative to group D failures shall be as specified in the contract or purchase order (see 6.2).

4.5.6.3 Reinspection of group D sample units. Unless otherwise specified, sample units which have been subjected to group D inspection may be accepted on contract or order provided all damage is repaired and the units are resubjected to and pass the tests of tables III and IV.

4.6 Performance characteristics.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:04Z
Check the source to verify that this is the current version before use.

4.6.1 Equivalent focal length. The equivalent focal length of the eyepiece lens shall be measured in accordance with MIL-STD-150. Failure to comply with the requirements of 3.6.1 shall constitute failure of this test.

4.6.2 Flange focal distance. The flange focal distance of the eyepiece lens shall be measured in accordance with MIL-STD-150. Failure to comply with the requirements of 3.6.2 shall constitute failure of this test.

4.6.3 Field flatness. The field flatness for the eyepiece lens shall be measured in accordance with MIL-STD-150. Failure to comply with the requirements of 3.6.3 shall constitute failure of this test.

4.6.4 Linear distortion. The linear distortion of the eyepiece lens shall be measured in accordance with MIL-STD-150. Failure to comply with the requirements of 3.6.4 shall constitute failure of this test.

4.6.5 Exit pupil. Brightly illuminate a cross target at the infinity focal plane of a collimator. Position an opaque mask on the eyepiece at the 28.0, $\pm$0.5 mm eye relief distance. The mask shall have two pinholes (1 mm diameter) 4 mm apart (center to center), centered on the optical axis, and alined in the azimuth direction. Place the eyepiece on a nodal slide so that the mask is between the collimator and the eyepiece. Rotate the eyepiece in azimuth 27°, $\pm$1° in each direction and locate the image of the cross target using a traveling microscope of 20X or greater. Failure to observe the cross target through each of the pinholes at both +27° and -27° rotation from center shall constitute failure of this test.

4.6.6 Transmission. Transmission of the eyepiece shall be measured in accordance with MIL-STD-150. Failure to comply with the requirements of 3.6.6 shall constitute failure of this test.

4.6.7 Modulation transfer function. A sine wave pattern generator with an S-11 photomultiplier tube shall be used. A green filter (Wratten No. 58 or equivalent) shall simulate P-20 illumination in the test setup. If a microscope objective is used to relay the image of the eyepiece lens, the numerical aperture (NA) must be greater than or equal to 0.35 with a minimum magnification of 10X. The pattern-collimator combination must allow the lens to be tested either continuously or at a minimum of eight distinct, evenly distributed points between 0 and 40 lp/mm including 0 lp/mm, referenced to the focal plane of the eyepiece.

4.6.7.1 On-axis MTF. The eyepiece lens shall be measured on-axis with the lens in the normal operation orientation (reticle erect) and then rotated about the optical axis 90° and remeasured in the same focal plane. Failure of either measurement to meet the requirements of 3.6.7 shall constitute failure of this test.

4.6.8 Diopter adjustment. Diopter adjustments shall be made throughout the specified operating temperature ranges. The dynamic torque shall be between 2 and 20 inch-pounds. Failure to meet the requirements of 3.6.8 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

4.6.9 Diopter range. With a target located at the focal plane of the eyepiece, use a dioptometer to determine that the range of the eyepiece is -6, (+1/4 -0) diopter to +2 diopters. Failure to meet the requirements of 3.6.9 shall constitute failure of this test.

4.7 Environmental.

4.7.1 Vibration. The eyepiece lens shall be subjected to Method 201A of MIL-STD-202. The induced vibratory force shall be applied in each of 3 mutually perpendicular planes one of which is perpendicular to the optical axis. The duration of vibration shall be 5 minutes in each plane. Any evidence of damage (see 6.3) shall constitute failure of this test.

4.7.2 High temperature storage and operation. The eyepiece lens shall be subjected to Test Method 501, Procedure I of MIL-STD-810. Operating temperature (Step 4) shall be 52°C for 3 hours. Storage temperature (Step 2) shall be +68°C for 6 hours duration. Any evidence of damage shall constitute failure of this test.

4.7.3 Low temperature storage and operation. The eyepiece lens shall be subjected to Test Method 502, Procedure I of MIL-STD-810. Storage temperature (Step 2) shall be -62°C for 9 hours and operating temperature (Step 4) shall be -54°C for 9 hours. Any evidence of damage shall constitute failure of this test.

4.7.4 Altitude. The eyepiece lens shall be subjected to Test Method 500, Procedure I of MIL-STD-810 except that the minimum chamber pressure shall be equivalent to 10,000 feet above sea level. Any evidence of damage shall constitute failure of this test.

4.7.5 Temperature shock. With the eyepiece lens initially at room temperature, place it in a chamber which has an internal temperature of 68°C and soak for 4 hours. Remove the eyepiece lens from the chamber and soak for 2 hours at room temperature. Place the eyepiece lens in a chamber with an internal temperature of -62°C and soak for 4 hours. Remove the eyepiece lens from the chamber and soak for 2 hours at room temperature. This constitutes one complete 12 hour cycle. Repeat the above cycle for a total test time of 24 hours. Any evidence of damage shall constitute failure of this test.

4.7.6 Humidity. The eyepiece lens shall be subjected to Test Method 507, Procedure II of MIL-STD-810, except that only two continuous 48 hour cycles shall be required. Any evidence of damage shall constitute failure of this test.

4.7.7 Immersion. The eyepiece lens shall be subjected to Test Method 512, Procedure I of MIL-STD-810. Any evidence of damage shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

4.7.8 High intensity shock. The eyepiece lens shall be subjected to Test Method 516, Procedure IV of MIL-STD-810 in accordance with Figure 516.2-2. The shocks shall be half sine pulses having a time duration of 4 milliseconds, ±5 percent and a peak amplitude of 100 g's, ±15 g's except that the shock pulses applied along the axes horizontal and perpendicular to the optical axis shall be 50 g's, ±15 percent. Any evidence of damage shall constitute failure of this test.

4.8 Reliability test. The contractor shall conduct the reliability test on 10 eyepiece lenses. The test shall be performed under the test conditions specified herein.

4.8.1 Test conditions. The reliability test shall be conducted in accordance with Test Level C of MIL-STD-781. Performance shall be measured, at a minimum, once every 112 hours of operating time by at least the following tests or inspections:

a. Transmission
b. Modulation transfer function

A performance test failure shall be presumed to have occurred immediately after the last successful measurement or inspection. An eyepiece lens shall be removed from the test for failure analysis upon the recognition of a failure. Each eyepiece lens shall be submitted to Group A inspection and the inspection of 4.3.1 if and when the eyepiece lens has accumulated 1500 hours. The eyepiece lens shall be submitted to Group A inspection. The following specific requirements of MIL-STD-781 shall apply.

(1) Design and performance tests
(2) Detail reliability test procedure
(3) Inspection
(4) Test facilities
(5) Selection of equipment
(6) Installation of equipment
(7) Testing the setup
(8) Determination of compliance
(9) Failure actions
(10) Failure categories
(11) Analysis of failure
(12) Failure confirmation
(13) Verifying repair
(14) Corrective action
(15) Restoration of failed equipments
(16) Final report

4.9 Packaging inspection. The inspection of the preservation-packaging and interior package marking shall be in accordance with the Group A and B quality conformance inspection requirements of MIL-P-116. The inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:04Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B or commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning and drying. The eyepiece lens shall be cleaned and dried as specified in MIL-P-14232.

5.1.1.2 Preservative application. No preservative required.

5.1.1.3 Unit Packing. Unit packing shall be in accordance with the methods or submethods prescribed in MIL-P-116 as specified herein.

5.1.1.4 Lens Assembly, Eyepiece, AN/PVS-4 and AN/TVS-5. Each eyepiece lens assembly shall be individually unit packed submethod IA-15 as follows: Cushion each assembly by wrapping with cushioning material conforming to PPP-C-1797 as required to protect the assembly. Place the cushioned assembly within a box conforming to PPP-B-566. Place the box within a barrier bag fabricated of material conforming to MIL-B-117, type II, class E, style I. Heat seal the closure, leaving a small opening for exhausting air. Exhaust the entrapped air and complete the seal.

5.1.1.4.1 Intermediate packing. Place 20 eyepiece lenses, unit packed as specified in 5.1.1.3, within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Close the box in accordance with the appendix of the box specification. Intermediate containers shall not exceed a maximum of 1.5 cubic feet, with at least two dimensions not exceeding 16 inches each.

5.1.2 Level B. Cleaning, drying, preservative application, unit packing and intermediate packing shall be as specified in 5.1.1, except that submethod IC-2 shall be used in lieu of submethod IA-15.

5.1.3 Commercial preservation. Preservation shall be in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or commercial, as specified (see 6.2). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. A quantity of eyepiece lenses, unit and intermediate packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:04Z
Check the source to verify that this is the current version before use.

5.2.1.1 Unitization. Palletization shall be required when: containers specified in 5.2.1 do not require skids; quantities per destination exceed either a total of 250 pounds (excluding the pallet) or a volume of 20 cubic feet; and the container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers, packed as specified in 5.2.1 except that container strapping may be omitted, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film conforming to L-P-378, type IV.

5.2.2 Level B. A quantity of eyepiece lenses, unit and intermediate packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-640, class 2, style E or PPP-B-636, type CF, class weather-resistant. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers shall be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A or shrink film conforming to L-P-378, type IV. When a single unit is shipped to a single destination no packing is required; the unit container shall serve as the shipping container. Reinforcing shall be as specified above.

5.2.2.1 Unitization. Palletization shall be required when quantities per destination exceed either a total of 250 pounds (excluding the pallet) or a volume of 20 cubic feet, and the container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of objective lenses, unit and intermediate packed as specified in 5.1, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film conforming to L-P-378, type IV.

5.2.3 Commercial packing. Packing shall be in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.3 Commercial marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-1188.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The eyepiece lens is used for aimed firing at night with the Night Vision Sight, Individual Served Weapon AN/PVS-4 and the Night Vision Sight, Crew Served Weapon AN/TVS-5.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.
b. Desired level of preservation, packaging and packing (see 5.1, 5.2).
c. Quantity and schedule for first article testing (see 4.4).
d. Associate lots for Quality Control Inspection with the monthly requirements established in the contract schedule.
e. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.
f. Necessary actions by the contractor in the event of a group C or D failure (see 4.5.4 and 4.5.6.2).

6.3 Definitions.

6.3.1 Damage. Breakage, loosening, shifting, evidence of corrosion or failure of any finish, hardware, connection or component; leakage or condensation of moisture within the eyepiece lens; or degradation in input or output characteristics.

6.3.3 "g". "g" is defined as an acceleration or deceleration of 32.17 feet per second per second.

6.3.3 Room temperature. Room temperature is defined as $+23^{\circ}C$, $\pm 3^{\circ}C$.

6.3.4 Lot size. A lot is defined as those eyepiece lenses successfully completing Group A inspection for any one month.

Custodian:
Army - ER

User activity:

Army - AR

Preparing activity:
Army - ER

Project 5855-A156

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:04Z
Check the source to verify that this is the current version before use.

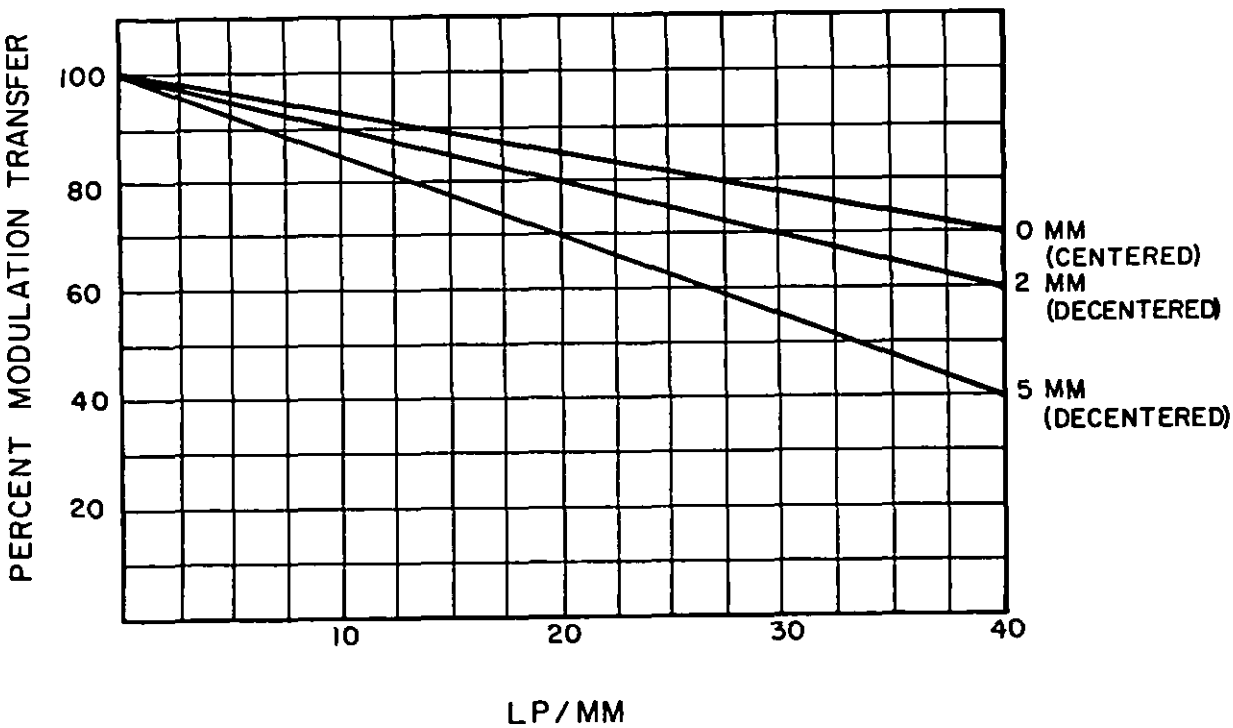


FIG. 1. EYEPIECE MTF ON AXIS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Hq, USA Electronics Research and
Development Command
ATTN: DRDEL-E
2800 Powder Mill Road
Adelphi, MD 20783

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-L-49368(ER)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.