MIL-P-52258B
18 May 1981
SUPERSEDING
MIL-P-52258A
28 January 1974

MILITARY SPECIFICATION

PICKETS, STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers steel pickets to be used as ground anchor or holdfast.

1.2 Classification. The pickets shall be of the following types as specified (see 6.2):

Type I - 1-1/4 inch diameter by 36 inches long.
Type II - 1-1/4 inch diameter by 42 inches long.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.

FSC 5420

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-704	- Treatment and Painting of Materiel.

STANDARDS

FEDERAL

FED-STD-595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ANSI/ASTM)

A108 - Steel Bars, Carbon, Cold-Finished, Standard Quality.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WELDING SOCIETY (AWS)

A5.1 - Mild Steel Covered Arc-Welding Electrodes

A5.18 - Mild Steel Electrodes for Gas Metal-Arc Welding

D1.1 - Structrual Welding Code, Section 5, Qualification

(Application for copies should be addressed to the American Welding Society, Inc. 2501 N.W. 7th Street, Miami, FLA 33125.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Section IX Welding Qualifications

(Applications for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10017.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The picket shall be as shown on the applicable figure and as specified herein.

3.2 First article (preproduction model). The contractor shall furnish one picket for examination within the time frame specified (see 6.2), to prove, prior to starting production, that his production methods will produce pickets that comply with the requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as shown on the applicable figure and as specified herein (see 6.4).

3.4 Identification marking. The picket shall be metal-die stamped as shown on the figure. Die stamping shall be legible after painting.

3.5 Treatment and painting. The picket shall be cleaned, treated, and painted in accordance with MIL-1-704, type B. The color number designation shall be 34087 in accordance with FED-STD-595.

3.6 Type I, 1-1/4 inch diameter by 36 inch long picket. The type I picket shall be as shown in figure 1.

3.7 Type II, 1-1/4 inch diameter by 42 inches long. The type II picket shall be as shown on figure 2.

3.7.1 Welding electrodes. Welding electrodes shall conform to AWS A5.1 or A5.18, classification E60 or E70 Series, size as required.

3.8 Workmanship.

3.8.1 Steel fabrication. Steel used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not deterimental to safety.

3.8.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale that can be removed by chipping and wire brushing, and other foreign matter. Unless otherwise specified (see 6.2), the welding process used in fabrication of the (pickets) shall be at the option of the contractor. All welded parts shall be free from cracks and other imperfections that may reduce the effectiveness of the part.

3.8.3 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

AWS D1.1, Structural Welding Code, Section 5, Qualification.
ASME Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

Contractor who make only horizontal welds need not qualify welders for "all position welding". Subject to approval by the Government, the contractor's standard welder qualification may be substituted in lieu of the above codes provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with AWS or ASME codes.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specifieid herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction picket shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling for examination. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective for major defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

4.5 Inspection procedure.

4.5.1 Examination. The picket shall be examined as specified herein for the following defects:

Major

101. Nonconformance to the dimensions shown on the applicable figure.
102. Material not as specified.
103. Workmanship not as specified.
104. Identification marking incorrect, missing, or illegible.
105. Treatment and painting not as specified.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106. Pickets of unlike description packed together, for level A or B.
107. Boxes not in accordance with the referenced document for level A or B.
108. Boxes not reinforced as specified for level A or B.
109. Strapping not zinc coated for level A.
110. Gross weight of each box exceeds 250 pounds for level A or B.
111. Marking missing, illegible, incomplete or incorrect.

5. PACKAGING

5.1 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.1.1 Level A. The pickets of like description shall be packed in quantities not to exceed 250 pounds gross weight. The container shall be a close-fitting box conforming to PPP-B-621, class 2, style 2, for type 3 load. The ends of the box shall be reinforced by the addition of boards covering the entire inner face of each end. The reinforcing boards shall be the same thickness as the end boards, shall be placed with the grain direction at right angles to that of the end boards, and shall be nailed to them with nail clinched. The pickets shall be packed in layers with the ends alternated in each layer. The sides, top, and bottom of the box shall be nailed to the reinforcing boards in addition to the nailing required by the box specification. The boxes shall be closed and strapped in accordance with the appendix to the box specification. Strapping shall be zinc coated.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:11Z
Check the source to verify that this is the currentversion before use.

5.1.2 Level B. The pickets shall be packed as specified in 5.1.1 for level A except the box shall be class 1 and strapping shall not be required to be zinc coated.

5.1.3 Commercial. The pickets shall be packed in accordance with MIL-STD-1188.

5.2 Marking.

5.2.1 Military. Shipping containers shall be marked in accordance with MIL-STD-129.

5.2.2 Commercial. Marking for commercial shipping containers shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The pickets are intended for use in the ground anchorage or holdfast system of floating and fixed bridges.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Type required (see 1.2).
(c) Time frame required for submission of preproduction model (see 3.2).
(d) Degree of packing required (see 5.1).

6.3 Preproduction model. Any changes or deviations of production pickets from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish pickets conforming to this specification.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).


Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
Navy - MC

Project 5420-0138

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

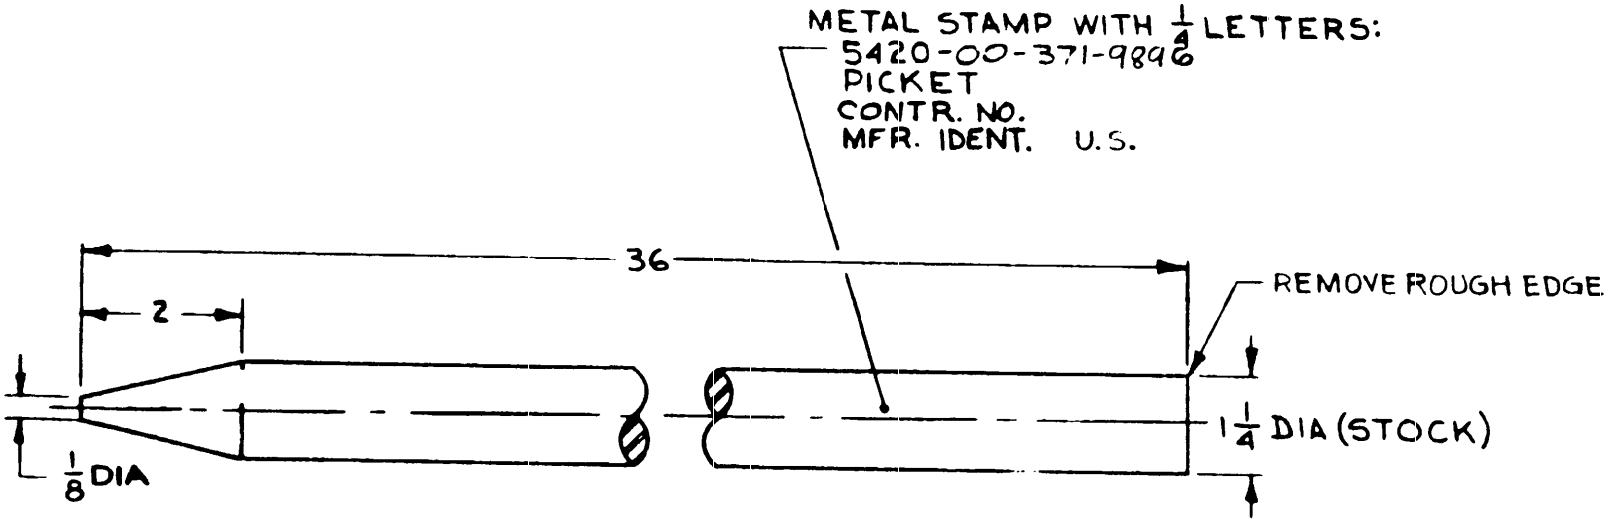


MATERIAL: STEEL, ASTM A108,
UNS G 10200-G 10250

NOTE:
1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ± 1/16

FIGURE 1. Picket, steel, Type I.

X-2452B

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T21:11Z
Check the source to verify that this is the current version before use.

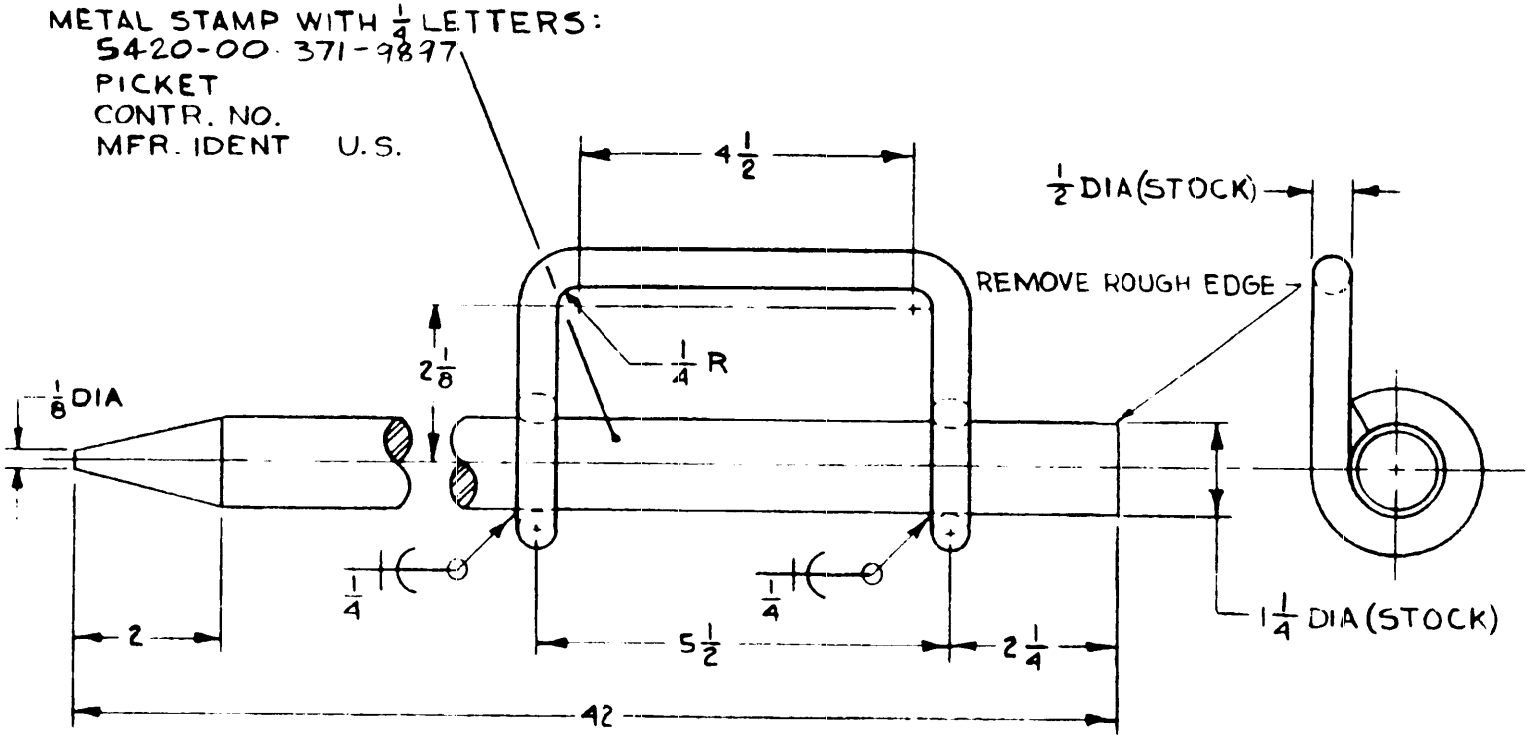

MATERIAL: STEEL, ASTM A108,
UNS G10200-G10250

NOTE:
1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ± 1/16

FIGURE 2. Picket, steel, Type II.

X-2453B

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T21:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE. This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-P-52258B Pickets, Steel

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:11Z
Check the source to verify that this is the currentversion before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:11Z
Check the source to verify that this is the current version before use.