

PROJECT NO. 6125-0145

FED. SUP CLASS
6125 & 6130

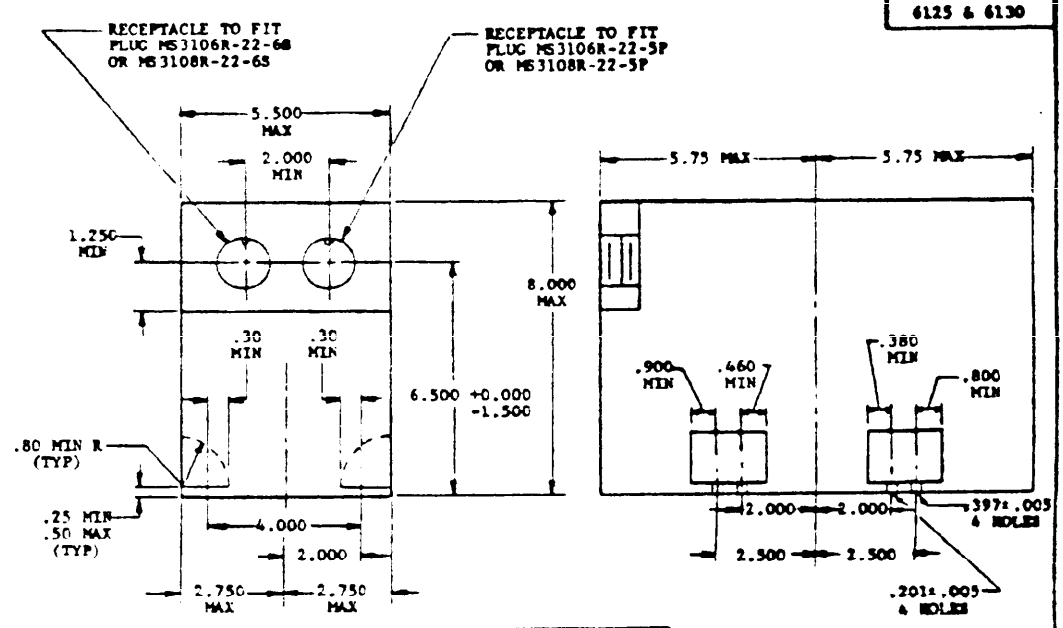

MS17406-1, -1A, -2, -2A

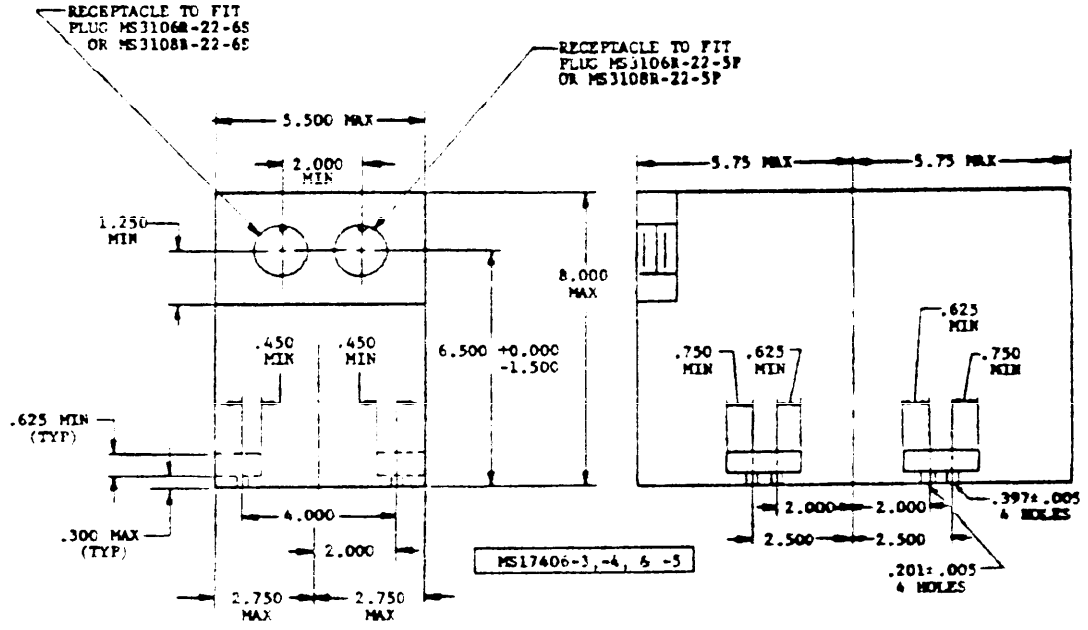

MS17406-3, -4, & -5

MS17406-1 AND -2 ARE INACTIVE FOR DESIGN AFTER USE MS17406-1A AND -2A.
INTERCHANGEABILITY RELATIONSHIP - MS17406-1A AND -2A PARTS CAN UNIVERSALLY REPLACE THE INACTIVATED MS17406-1 AND -2 PARTS.

© ENTIRE STANDARD REVISED & REDRAWN

APPROVED 10 JULY 1962 REVISED (A) 15 OCT 65 (C) 14 JUN 1974

P.A. NAVY - AS Other Cust USAF-82 ARMY-ME	TITLE INVERTER, 750 VA 3/1 PHASE, 750 VA 3 PHASE, & 1000 VA 1 PHASE CLASS B, MULTI-PURPOSE	MILITARY STANDARD MS17406
PROCUREMENT SPECIFICATION MIL-I-7032	SUPERSEDES MS25094	SHEET 1 OF 6

DD FORM 672-1 (Coordinated)

REVIEWER SYMBOLS: ARMY - AV, NAVY, USAF
USER SYMBOLS: NAVY, ARMY - EL


"Review/use information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Distribution for all new engineering and design applications and for replacement use shall be made from this document.


Source: https://assist.dla.mil -- Downloaded: 202610-23T14:08Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
6125 & 6130


AC OUTPUT
PHASE ROTATION A, B, C

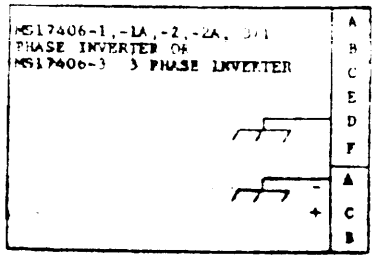


EXTERNAL CONNECTIONS NECESSARY
FOR APPROPRIATE INPUT AND OUTPUT

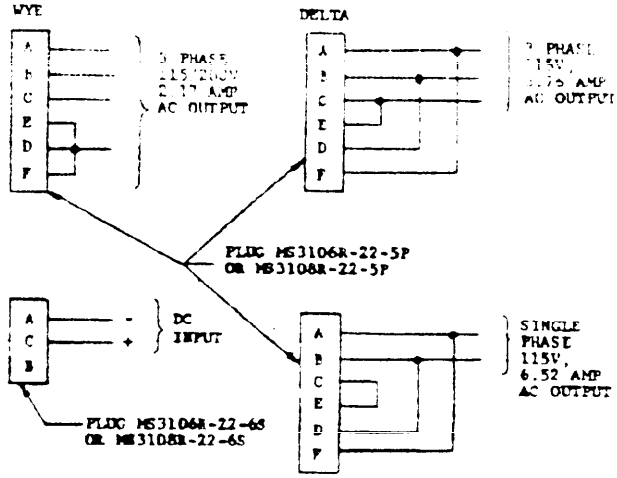

SINGLE PHASE (MS17406-1, -1A, -2, -2A, ONLY)

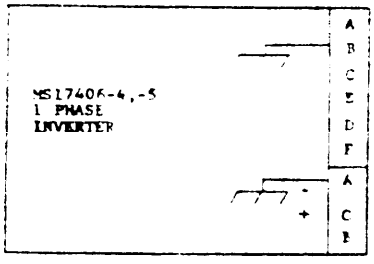

EXTERNAL CONNECTIONS NECESSARY
FOR APPROPRIATE INPUT AND OUTPUT

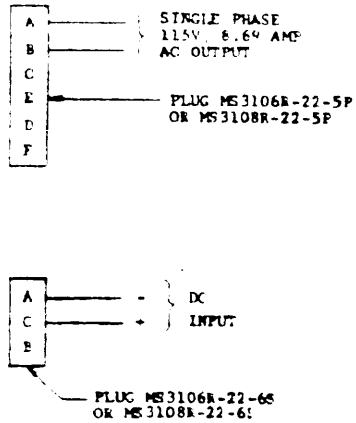

APPROVED 10 JULY 1962 REVISED (C) FOR CHANGES SEE SHEETS 1 THRU 6

P.A. NAVY - AS Other Cust USAF-82 ARMY-ME	TITLE INVERTER, 750 VA 3/1 PHASE, 750 VA 3 PHASE, & 1000 VA 1 PHASE, CLASS B, MULTI-PURPOSE	MILITARY STANDARD MS17406
PROCUREMENT SPECIFICATION MIL-I-7032	SUPERSEDES MS25094	SHEET 2 OF 6

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 22000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6125 & 6130

TABLE I

PART NO.	DESCRIPTION
MS17406-1	3/1 PHASE 750VA ROTARY BRUSH-TYPE INVERTER WITH AIR EXHAUST FROM CENTER (DUPLEX).
MS17406-1A	SAME AS -1 EXCEPT INCORPORATES OVERVOLTAGE PROTECTION AND TIMER.
MS17406-2	3/1 PHASE 750VA ROTARY BRUSH TYPE INVERTER WITH AIR EXHAUST FROM PLUG END (SIMPLEX).
MS17406-2A	SAME AS -2 EXCEPT INCORPORATES OVERVOLTAGE PROTECTION AND TIMER.
MS17406-3	3 PHASE, 750VA, STATIC INVERTER.
MS17406-4	SINGLE PHASE, 1000 VA, STATIC INVERTER.
MS17406-5	SINGLE PHASE, 1000 VA, LOW INPUT VOLTAGE, STATIC INVERTER.

TABLE II

PARAMETERS AND CONDITIONS	NOMINAL VALUES			
	MS17406-1, -1A, -2, -2A		MS17406-3	MS17406-4 & -5
	3ϕ	1ϕ	3ϕ	1ϕ
INPUT: VOLTS, DC	28	28	28	28
OUTPUT: VOLTS, AC	115/200	115	115/200	115
FREQUENCY: Hz	400	400	400	400
VA TO 50,000 FT ALTITUDE	750	750	750	1000
VA TO 65,000 FT ALTITUDE	375	375	750	750
MIN. LAGGING P.F.	.80	.80	.75	.75
MIN. LEADING P.F.	.95	.95	.95	.95
MIN. EFFICIENCY: PERCENT AT FULL LOAD, UNITY P.F., 28 VOLT INPUT SEA LEVEL AND 25 (+15°C AMBIENT	50	45	65	65
MAX WEIGHT: POUNDS	23	23	23	23

APPROVED 10 JULY 1962 REVISED (C) FOR CHANGES SEE SHEETS 1 THRU

REVIEWER SYMBOLS: ARMY - AV, NAVY -, USAF -

USER SYMBOLS: NAVY -, ARMY - EL

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairing are shall be made from this document.

P.A. NAVY - AS; Other Cog: USAF-82, ARMY-ME	TITLE: INVERTER, 750 VA 3/1 PHASE, 750 VA 3 PHASE, & 1000 VA 1 PHASE, CLASS B, MULTI-PURPOSE	MILITARY STANDARD MS17406
PROCUREMENT SPECIFICATION: MIL-I-7032	SUPERSEDES: MS25094	SHEET 3 OF 6

DD FORM MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 22000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.

TABLE III

OPERATING CONDITIONS FOR ANY COMBINATION OF CONDITIONS LISTED WITHIN EACH SECTION BELOW, THE OUTPUT VOLTAGE AND FREQUENCY SHALL REMAIN WITHIN THE INDICATED LIMITS	OUTPUT LIMITS (LIMITS APPLY TO EACH PHASE FOR THREE PHASE OPERATION)					
	MS17406-1, -1A, -2, -2A		MS17406-3 & -4		MS17406-5	
	RMS PHASE VOLTAGE	FREQ (Hz)	RMS PHASE VOLTAGE	FREQ (Hz)	RMS PHASE VOLTAGE	FREQ (Hz)
1. INPUT VOLTAGE VARIED BETWEEN 26 AND 29 VOLTS 2. LOAD VARIED FROM ZERO TO FULL LOAD. 3. AMBIENT TEMPERATURE-ALTITUDE VARIED WITHIN THE RANGE ESTABLISHED BY CURVE 1 OF MS33543 EXCEPT NO OPERATION ABOVE 65,000 FT. ABOVE 85°C OR BELOW -55°C. 4. LOAD POWER FACTOR VARIED FROM .75 LAG OR .80 LAG (AS APPLICABLE) TO .95 LEAD. 5. UNIT MOUNTED IN ANY POSITION.	LOW 112.5 HIGH 117.5	LOW 390 HIGH 410	LOW 112.5 HIGH 117.5	LOW 393 HIGH 407	LOW 112.5 HIGH 117.5	LOW 393 HIGH 407
6. VARIATIONS 2,3,5 ABOVE AND INPUT VOLTAGE VARIED BETWEEN 20 AND 26 VOLTS FOR MS17406-1, -1A, -2, -2A INVERTERS AND BETWEEN 18 AND 26 VOLTS FOR MS17406-3,4, & -5 INVERTERS	LOW 100(a) HIGH 120(a)	LOW 350(a) HIGH 410(a)	LOW 100 HIGH 117.5	LOW 393 HIGH 407	LOW 100 HIGH 117.5	LOW 393 HIGH 407
7. VARIATIONS 1. THROUGH 5. ABOVE EXCEPT LOAD VARIED FROM RATED FULL LOAD CURRENT TO 200% RATED FULL LOAD CURRENT FOR 5 SECONDS	LOW 50 HIGH 117.5	LOW 385 HIGH 410	LOW 50 HIGH 117.5	LOW 393 HIGH 407	LOW 50 HIGH 117.5	LOW 393 HIGH 407
8. INPUT VOLTAGE VARIED BETWEEN 9 AND 18 VOLTS FOR THREE MINUTES. 9. LOAD IMPEDANCE VARIED FROM INFINITY TO 26.5 OHMS FOR THE MS17406-4 & -5 INVERTERS AND FROM INFINITY TO 106 OHMS/PHASE FOR THE MS17406-3 INVERTER. 10. AMBIENT TEMPERATURE VARIED BETWEEN -35°C AND +40°C AT SEA LEVEL WITH INVERTER FULLY WARMED UP AND BETWEEN -35°C AND +85°C AT SEA LEVEL WITH INVERTER NOT PREVIOUSLY WARMED UP. 11. VARIATIONS 4. AND 5. ABOVE.	NO OPERATION REQUIRED	NO OPERATION REQUIRED	LOW 45 HIGH 117.5	LOW 393 HIGH 407	LOW 105 HIGH 117.5	LOW 393 HIGH 407

(a) FOR THIS CONDITION, THE LINE-NEUTRAL FREQUENCY/VOLTAGE RATIO SHALL REMAIN BETWEEN 3.0 AND 4.0.

APPROVED 10 JULY 1962 REVISED (C) FOR CHANGES SEE SHEETS 1 THRU 6

P.A. NAVY - AS Other Cust USAF-82 ARMY-ME	TITLE: INVERTER, 750 VA 3/1 PHASE, 750 VA 3 PHASE & 1000 VA 1 PHASE CLASS B, MULTI-PURPOSE	MILITARY STANDARD MS17406
PROCUREMENT SPECIFICATION MIL-I-7032	SUPERSEDES MS25094	SHEET 4 OF 6

DD FORM 1673-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 22059

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6125 & 6130

REQUIREMENTS: - MS17406-1,-1A,-2,-2A,-3,-4,-5

1. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED. FRACTIONS ±1/64. DECIMALS ±.015.
2. THE AIRCRAFT MANUFACTURER SHALL ALLOW CLEARANCE OF AT LEAST ONE INCH AT EACH END OF THE INVERTER IN ADDITION TO THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION AND VENTILATION.
3. THE WEIGHT AND DIMENSIONS SHOWN ON THIS DRAWING SHALL INCLUDE THE WEIGHT AND DIMENSIONS OF ALL AUXILIARY APPARATUS NECESSARY TO MAKE THIS PRODUCT CONFORM TO THIS DRAWING AND THE PROCUREMENT SPECIFICATION.
4. THE INVERTER SHALL NOT REQUIRE ANY WARM-UP TO MEET ALL REQUIREMENTS OF THIS DRAWING AND THE PROCUREMENT SPECIFICATION.
5. INVERTERS SHALL BE DESIGNED TO BE REPAIRABLE USING STANDARD OR COMMONLY AVAILABLE TOOLS AND TEST EQUIPMENT.
6. THE INVERTER SHALL REQUIRE NO CONDUCTION COOLING UNDER ANY RATED OPERATING CONDITION.
7. FOR THREE PHASE AIRCRAFT APPLICATIONS, THE LOAD ON ANY ONE PHASE SHALL NOT EXCEED ONE THIRD OF THE TOTAL THREE PHASE INVERTER RATING.
8. PERMISSION OF THE PROCURING ACTIVITY SHALL BE OBTAINED FOR AN APPLICATION OF THIS UNIT OUTSIDE OF THE SPECIFIED LIMITS.

REQUIREMENTS: - MS17406-1, 1A, AND -2, 2A ONLY

9. THE INVERTER MAY BE LOADED EITHER THREE PHASE OR SINGLE PHASE BUT NOT SIMULTANEOUSLY. THE UNIT SHALL OPERATE IN THE PROPER MODE WHEN EXTERNAL CONNECTIONS ARE MADE AS SHOWN IN THE CONNECTION DIAGRAM.
10. A VOLTAGE ADJUSTMENT MEANS SHALL BE LOCATED ON THE CONNECTOR END ABOVE THE HORIZONTAL CENTERLINE OF THE INVERTER.
11. TWO PLACARDED PIN JACKS SHALL BE PROVIDED ON THE CONNECTOR END ABOVE THE HORIZONTAL CENTERLINE OF THE INVERTER BETWEEN WHICH THE VOLTAGE BETWEEN PINS A AND D MAY BE MEASURED. THESE PIN JACKS SHALL ACCEPT A PROD PIN .078± .002 INCH IN DIAMETER.
12. THE INVERTER SHALL BE PROVIDED WITH A STATIC SEMI-CONDUCTOR TYPE VOLTAGE AND FREQUENCY REGULATOR DESIGNED AND CONSTRUCTED SO THAT IT MAY BE USED IN MS3371, MS16062-1, MS17404-1 AND -2, MS17407-1 AND -2, MS21983-1, AND MS25202-1 INVERTERS OF THE SAME MANUFACTURER.

REQUIREMENTS: - MS17406-1A AND -2A ONLY

13. THE INVERTER SHALL BE PROVIDED WITH AN OVERVOLTAGE PROTECTION CIRCUIT WHICH SHALL REMOVE INVERTER OUTPUT VOLTAGE WHEN THE VOLTAGE IS BETWEEN 122 AND 130 VOLTS. OVERVOLTAGE TRANSIENTS SHALL NOT EXCEED THE LIMITS OF MIL-STD-704 FOR CATEGORY B EQUIPMENT, ABNORMAL ELECTRIC SYSTEM OPERATION.
14. THE INVERTER SHALL BE PROVIDED WITH A METER, TIME TOTALIZER CONFORMING TO MS17322-10. THE METER SHALL BE LOCATED ON THE LEFT SIDE OF THE CONTROL BOX FACING THE CONNECTOR END.

REQUIREMENTS: - MS17406-3 AND -4

15. THIS INVERTER SHALL BE A STATIC, SEMI-CONDUCTOR DEVICE EMPLOYING NO MOVING PARTS EXCEPT THAT A COOLING FAN SHALL BE ALLOWABLE.
16. THE MS17406-3 INVERTER MAY BE LOADED THREE PHASE ONLY. THE INVERTER SHALL OPERATE EITHER IN THE WYE OR DELTA MODE WHEN EXTERNAL CONNECTIONS ARE MADE AS SHOWN IN THE CONNECTION DIAGRAM.
17. TWO PLACARDED PIN JACKS SHALL BE PROVIDED ON THE CONNECTOR END ABOVE THE HORIZONTAL CENTERLINE OF THE INVERTER BETWEEN WHICH THE VOLTAGE A-D MAY BE MEASURED FOR THE MS17406-3 INVERTER OR A-B FOR THE MS17406-4 INVERTER.
18. FOR THREE PHASE OPERATION, THE PHASE DISPLACEMENT BETWEEN ADJACENT PHASES SHALL BE 120°±6° FOR BOTH BALANCED AND UNBALANCED LOAD CONDITIONS AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.
19. THE OUTPUT VOLTAGE DURING STARTING SHALL BE AT ITS STEADY STATE CONDITION WITHIN TWO SECONDS AFTER APPLICATION OF INPUT VOLTAGE AND SHALL REMAIN AT THAT CONDITION THEREAFTER. DURING THE TWO SECOND STARTING PERIOD, THE MAXIMUM PEAK OUTPUT VOLTAGE SHALL NOT EXCEED 198 VOLTS. THE INVERTER SHALL CONFORM TO THIS REQUIREMENT FROM NO LOAD TO FULL LOAD, FROM 26 VOLTS TO 29 VOLTS INPUT AND ALL RATED TEMPERATURE OR ALTITUDE CONDITIONS.
20. WHEN COMPUTING EFFICIENCY, MEAN (AVERAGE) VALUES OF INPUT VOLTAGE AND CURRENT SHALL BE USED AND ROOT MEAN SQUARE (RMS) VALUES OF OUTPUT VOLTAGE AND CURRENT OR AVERAGE OUTPUT POWER SHALL BE USED.
21. THE TOTAL HARMONIC AND EXTRANEOUS FREQUENCY CONTENT OF THE WAVEFORM SHALL NOT EXCEED 5 PERCENT OF THE FUNDAMENTAL, NOR SHALL ANY INDIVIDUAL HARMONIC OR EXTRANEOUS FREQUENCY EXCEED 3 PERCENT OF THE FUNDAMENTAL UNDER THE CONDITIONS OF THE PARAGRAPH ENTITLED "WAVEFORM" IN MIL-I-7032.
22. THE MINIMUM USEABLE LIFE SHALL BE 2500 HOURS UNDER THE CONDITIONS OF THE LIFE TEST SPECIFIED IN MIL-I-7032. AS A DESIGN OBJECTIVE, THE UNIT SHALL HAVE A USEABLE LIFE OF AT LEAST 10,000 HOURS. FAILURE OF A COOLING FAN, IF USED, SHALL CONSTITUTE INVERTER FAILURE, ALTHOUGH THE INVERTER MAY OPERATE NORMALLY UNDER MOST CONDITIONS WITHOUT ITS USE.
23. THE INVERTER SHALL NOT BE DAMAGED WHEN THE INPUT VOLTAGE IS UNIFORMLY VARIED FROM ZERO TO 32 VOLTS AND BACK TO ZERO OVER A FIVE MINUTE PERIOD UNDER ANY RATED LOAD CONDITION.
24. AFTER DELIVERING SPECIFIED OVERLOAD OR SHORT CIRCUIT CURRENT FOR AT LEAST 5 SECONDS PER MIL-I-7032, THE INVERTER SHALL HAVE AUTOMATIC ELECTRONIC OVERLOAD AND SHORT CIRCUIT PROTECTION. THE INVERTER SHALL THEN OPERATE FOR AT LEAST 15 MINUTES, WITHOUT DAMAGE, INTO THIS OVERLOAD OR SHORT CIRCUIT. OUTPUT VOLTAGE AND/OR CURRENT MAY DROP TO ANY LEVEL AFTER THE FIRST 5 SECONDS. NORMAL OUTPUT VOLTAGE SHALL OCCUR WITHIN 2 SECONDS AFTER REMOVAL OF THE OVERLOAD OR SHORT CIRCUIT.

APPROVED 10 JULY 1962 REVISED © FOR CHANGES SEE SHEET 1

P.A. NAVY - AS Other Cognizance USAF-82 ARMY-ME	TITLE INVERTER, 750 VA 3/1 PHASE, 750 VA 3 PHASE, & 1000 VA 1 PHASE CLASS B, MULTI-PURPOSE	MILITARY STANDARD MS17406
PROCUREMENT SPECIFICATION MIL-I-7032	SUPERSEDES MS25094	SHEET 5 OF 6

DD FORM 672-1 (Coordinated) PLATE NO. 25050

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: - MS17406-3 AND -4 (CONT'D)

25. DURING THE RECOVERY TIME TEST OF MIL-I-7032, THE MAXIMUM PEAK OUTPUT VOLTAGE SHALL NOT EXCEED 198 VOLTS.
26. THE INVERTER SHALL NOT INFLUENCE THE DC POWER SUPPLY SYSTEM IN EXCESS OF THE LIMITS SPECIFIED IN THE PARAGRAPH ENTITLED "INFLUENCE ON ELECTRIC SYSTEM" IN MIL-STD-704. THE DC POWER SUPPLY SYSTEM SHALL BE A STANDARD AIRCRAFT SYSTEM RATED 100 AMPERES OR MORE. PEAK TO MEAN INPUT RIPPLE CURRENTS DRAWN BY THE INVERTER SHALL NOT EXCEED 10 AMPERES WHEN THE INVERTER IS OPERATED FROM A ZERO IMPEDANCE SOURCE. THIS REQUIREMENT SHALL APPLY UNDER OPERATING CONDITIONS 1. THROUGH 5. OF THIS DRAWING.
27. THE INVERTER SHALL MEET ALL REQUIREMENTS OF THIS DRAWING AND THE PROCUREMENT SPECIFICATION WHEN SUPPLIED WITH POWER CONFORMING TO THE REQUIREMENTS OF MIL-STD-704. THE INVERTER SHALL NOT BE DAMAGED BY INPUT SURGE AND SPIKE VOLTAGES AS DEFINED THEREIN AND SHALL MEET ALL REQUIREMENTS WITH INPUT RIPPLE VOLTAGE CONFORMING TO MIL-STD-704.
28. THE INVERTER SHALL NOT HAVE AN EXTERNAL VOLTAGE ADJUSTMENT.
29. THE MS17406-3 INVERTER SHALL MEET ALL THREE PHASE REQUIREMENTS OF THIS DRAWING AND THE PROCUREMENT SPECIFICATION WHEN CONNECTED IN DELTA AS WELL AS WYE CONFIGURATION.
30. BOTH NARROWBAND AND BROADBAND CONDUCTED AND RADIATED ELECTROMAGNETIC INTERFERENCE SHALL BE WITHIN THE LIMITS OF MIL-STD-461 WHEN TESTED IN ACCORDANCE WITH MIL-STD-462, METHODS CE03 AND RE02. THE LOWER TEST FREQUENCY SHALL BE LIMITED TO 150 kHz FOR BOTH TESTS. THE INVERTER SHALL MEET THE REQUIREMENTS UNDER ANY INPUT VOLTAGE AND LOAD CONDITION SPECIFIED BY THIS DRAWING. DURING THIS TEST, THE INVERTER LOAD POWER FACTOR SHALL BE ADJUSTED SUCH THAT THE COMBINED POWER FACTOR OF THE LOAD AND ALL AUXILIARY TEST EQUIPMENT REQUIRED SHALL PRESENT A TOTAL LOAD POWER FACTOR TO THE INVERTER WITHIN THE RANGE SPECIFIED BY THIS DRAWING.

REQUIREMENTS: - MS17406-5 ONLY

31. THE MS17406-5 INVERTER SHALL MEET ALL REQUIREMENTS OF THE MS17406-4 INVERTER IN ADDITION TO MS17406-5 LOW INPUT VOLTAGE OPERATING REQUIREMENTS.
32. TOTAL HARMONIC AND EXTRANEOUS CONTENT SHALL NOT EXCEED 8% OF THE FUNDAMENTAL UNDER ANY RATED OPERATING CONDITION WITH INPUT VOLTAGE BETWEEN 9 AND 18 VOLTS.
33. INVERTER EFFICIENCY SHALL BE 50% MINIMUM AT INPUT VOLTAGES BETWEEN 9 AND 18 VOLTS, SEA LEVEL ALTITUDE, 25°±15°C AMBIENT TEMPERATURE, FULL LOAD, AND UNITY POWER FACTOR.
34. NO OUTPUT VOLTAGE AND FREQUENCY TRANSIENTS SHALL BE GENERATED WHEN INPUT VOLTAGE IS VARIED BETWEEN 9 AND 29 VOLTS.
35. ALL TESTS OF MIL-I-7032 APPLY BETWEEN 9 AND 18 VOLTS INPUT EXCEPT THE FOLLOWING: ACCELERATION, ENDURANCE, PERFORMANCE, LIFE, AND THE AMBIENT TEMPERATURE, ALTITUDE, AND WARMUP PORTIONS OF THE FACTORS AFFECTING VOLTAGE AND FREQUENCY REGULATION TEST.
36. THE INVERTER SHALL BE SUBJECTED TO 1250 CONSECUTIVE CYCLES OF OPERATION CONSISTING OF ONE MINUTE AT 9 VOLTS INPUT AND FULL LOAD AND 4 MINUTES AT 28 VOLTS INPUT AND 1000 VA LOAD. THIS TEST SHALL BE CONDUCTED AT ROOM AMBIENT WITH UNITY POWER FACTOR LOADS. THE INVERTER SHALL MEET ALL SPECIFIED REQUIREMENTS OF THIS DRAWING AND THE PROCUREMENT SPECIFICATION DURING AND AFTER THIS TEST.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

REVISED (Copy CHANGED SEE SHEETS 1 THRU 6)

APPROVED 13 JUN 1967

REVIEWER SYMBOLS: ARMY - AV, NAVY -, USAF -

USER SYMBOLS: NAVY - EL, ARMY -

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft revisions should be based on the information in the current DOD SS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Suggestions for improvements engineering and design applications and for application are shall be made from this document.

P.A. NAVY - AS Other Cost USAF-82 ARMY-ME	TITLE INVERTER, 750 VA 3/1 PHASE, 750 VA 3 PHASE, & 1000 VA 1 PHASE CLASS B, MULTI-PURPOSE	MILITARY STANDARD MS17406
PROCUREMENT SPECIFICATION MIL-I-7032	SUPERSEDES MS25094	SHEET 6 OF 6

DD FORM 1426 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 23089

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL	OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the Government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE	
MS17406C	INVERTER, 750 VA 3/1 PHASE, 750 VA 3 PHASE, & 1000 VA 1 PHASE CLASS B, MULTI-PURPOSE

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:08Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, PA 19112

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316



Engineering Specifications and Standards Department (Code ES)
Naval Air Engineering Center
Philadelphia, PA 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.