REVIEW ACTIVITIES: AIR FORCE - 82

USER ACTIVITIES: ARMY - EL, ME, MI

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6640

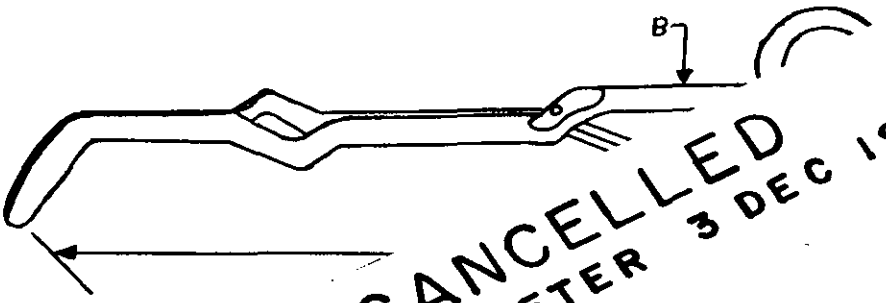

CANCELLED
CANCELLED AFTER 3 DEC 1975
USE MS 36023

B NOMINAL ROD DIAMETER (in.)	.in.)
1/4 to 5/16	18 to 20

MATERIAL: Tongs shall be of cold-rolled steel rod with a heavy nickel plating.

DESIGN: Tongs shall be flattened at the joint to prevent the finger grips from shifting out of alignment. Rivet shall be spun to insure free action without binding.

Finger grips shall be oval and shall give an efficient and comfortable grip.

Inside surfaces of jaw tips shall be serrated.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.

APPROVED 23 DEC 1959 REVISED (A) 15 DEC 1967 REVISED (B) 3 DEC 1975

P.A.	MU	TITLE	MILITARY STANDARD
Other Cust	MS 82	TONGS, LABORATORY crucible, muffle furnace type	MS 36024
Procurement Specification NONE		SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 65 672 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

DATE

DRAWN BY _____ _____

TYPED BY _____ _____

CHECKED BY _____ _____

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32 x 9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8 x 10½ SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10½ SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10½ SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.