FED. SUP CLASS
6640

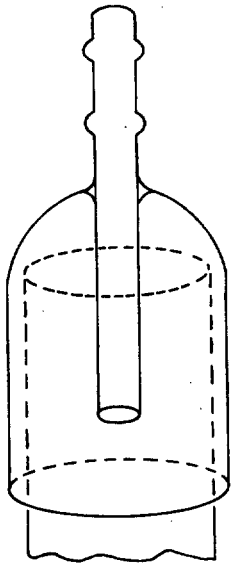

PART NUMBER	NOMINAL FILLING TUBE OD	MAXIMUM OD OF TEST TUBE ACCOMMODATED	NOMINAL OVERALL HEIGHT
MS36166-1	10mm	45mm	85mm

MATERIAL: Borosilicate glass in accordance with Federal Specification DD-G-541, Type I, Class A.

DESIGN: Filling attachment shall be of one piece construction with a ridged hose connection and a reinforced hood rim.

Delivery end shall be recessed within the hood.

NOTES:
1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.
2. Referenced document shall be of the issue in effect on date of invitations for bid.

APPROVED 30 DEC 1960 REVISED (A) 20 June 1969

USER ACTIVITIES: ARMY - EL, ME

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

(A) ENTIRE STANDARD REVISED

P.A. MU	TITLE	MILITARY STANDARD
Other Cust MS	FILLING ATTACHMENT, TEST TUBE	MS 36166
Procurement Specification None	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 63 672 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED.

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. [illegible] BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2

D

T

CHECKED BY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:35Z
Check the source to verify that this is the current version before use.