FED. SUP CLASS
6640

USER ACTIVITIES: ARMY - EL, ME

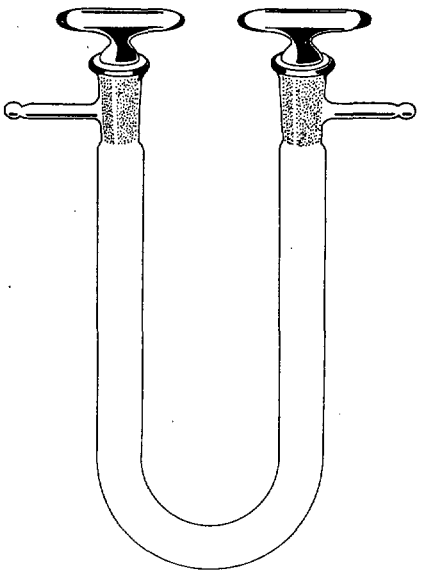

PART NUMBER	TUBE DATA mm		SIDE ARMS DATA mm		STOPPER ℊ SIZE
	OVERALL LENGTH W/O STOPPER	OUTSIDE DIAMETER	LENGTH	OUTSIDE DIAMETER	
MS36177-1	100 ± 3.0	16 ± 1.0	25 ± 3.0	7 ± 1.0	12/18 or 14/20

MATERIAL: Borosilicate glass in accordance with Federal Specification DD-G-541, Type I, Class A.

DESIGN: Drying tube shall be in accordance with Federal Specification NNN-T-792, Type II.

Drying tube shall be U-shaped, with side tubulations and standard tapered joints and stoppers.

Stoppers shall be hollow with an open bottom and shall have a side hole aligned to coincide with the tubulation openings.

NOTES:
1. Drying tube shall be supplied with standard tapered stoppers.
2. For design feature purposes this standard takes precedence over procurement document referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 30 DEC 1960 REVISED (A) 20 June 1969

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

(A) ENTIRE STANDARD REVISED

P.A. MU Other Cust MS	TITLE TUBE, DRYING, LABORATORY U-Tube, Schwartz type	MILITARY STANDARD MS36177
PROCUREMENT SPECIFICATION NNN-T-792	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-393-063/5-90

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:35Z
Check the source to verify that this is the current version before use.