

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-67


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

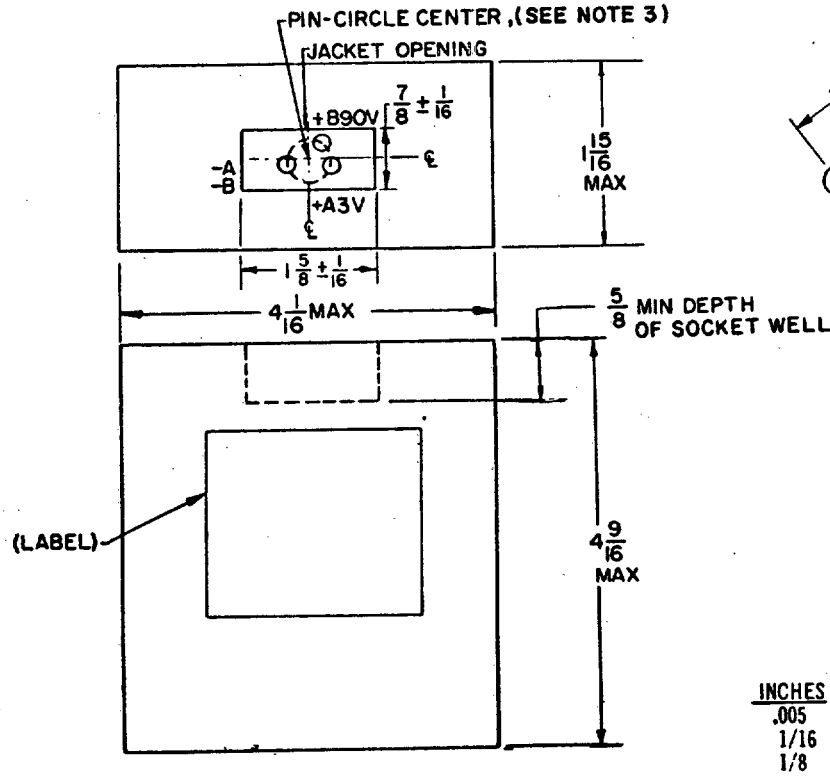

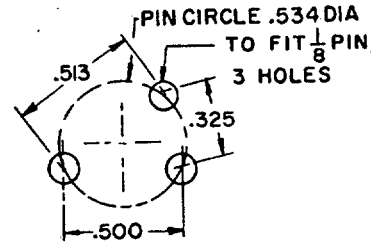

SOCKET DETAIL



TYPICAL SCHEMATIC

INCHES	MM
.005	.13
1/16	1.59
1/8	3.18
.325	8.26
.500	12.70
.513	13.03
.534	13.56

INCHES	MM
1 5/8	41.28
1 15/16	49.21
4 1/16	103.19
4 9/16	115.89

Ⓓ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:43Z
Check the source to verify that this is the current version before use.

FSC-6135

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerances are ±1/16 on fractions and ±0.005 on decimals.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. Pin circle center to be centrally located with respect to battery length and width.

REQUIREMENTS:

Dimensions and configuration: See figure.

		A unit	B unit
Nominal voltages:		3 volts	90 volts
Usual number and type of cell	C	8 "R" cells	60 "P" cells

Usual cell connection: Series - parallel - Series.

Terminals: 3-hole socket.

Weight (maximum): 1 pound, 9 ounces.

(D) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(D) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(D) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:43Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	6 months
	T	90 days

Discharge - The "A" unit shall be discharged through 16 ohms and the "B" unit through 7,500 ohms continuously to a test-end voltage of 2.2 volts for the "A" unit and 68.0 volts for the "B" unit.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use load resistance values noted below:

A	Section	19.95 ohms
B	Section	3,053 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
Unit A - 7	2.76
Unit B - 25	82.8

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:

Project Number: (6135-0155-23)

User activities:
Army - ME
Navy - YD, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:43Z
Check the source to verify that this is the current version before use.