
MIL-B-18/33D
21 May 1985
SUPERSEDING
MIL-B-18/33C
21 August 1976


MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-70


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

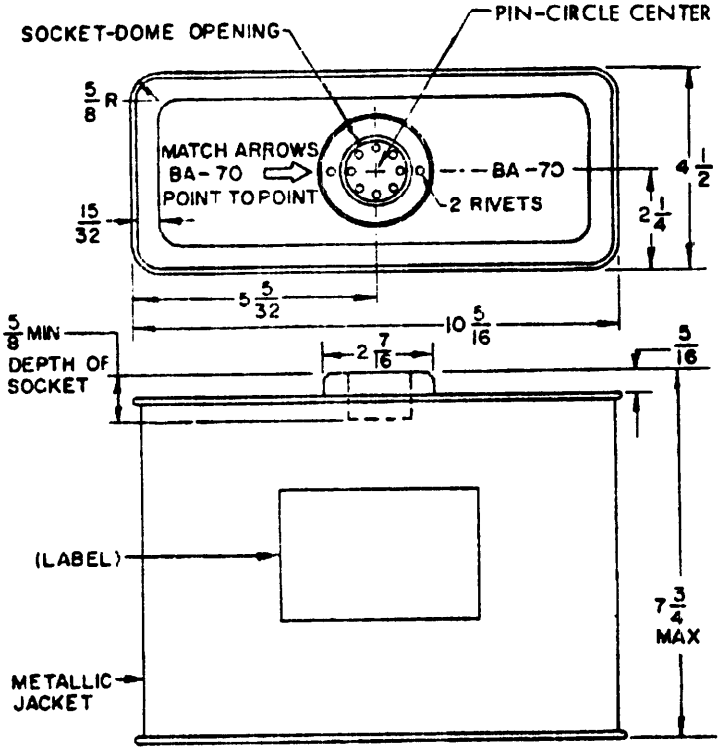




SOCKET MARKING

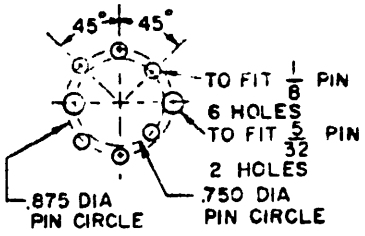

SOCKET DETAIL

INCHES	MM	INCHES	MM
.005	.13	.875	22.23
1/16	1.59	2 1/4	57.15
1/8	3.18	2 7/16	61.91
5/32	3.97	4 1/2	114.30
5/16	7.94	5 5/32	130.97
15/32	11.91	7 3/4	196.85
5/8	15.88	10 5/16	261.94
.750	19.05		

NOTES:



TYPICAL SCHEMATIC

D denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:43Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified tolerances are ±1/16 on fractions, ±0.005 on decimals, and ±1/2° on angles.

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

REQUIREMENTS:

Dimensions and configuration: See figure.

	A unit	B_1 unit	B_2 unit	B_1 and B_2 unit
Nominal voltage:	4.5 volts	90 volts	60 volts 1/	150 volts
Usual number and type of cells:	9 "G"	60 "B"	40 "B"	----
Usual cell connection	Series-parallel	Series	Series	----

1/ When both units are connected in series

Terminals: 8-hole socket.

Weight (Maximum) 16 pounds.

(D) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(D) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(D) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:43Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge: The "A" unit shall be discharged through 10 ohms for 2 minutes, then through 16 ohms for 4 minutes. This cycle shall be repeated continuously to a test-end voltage of 3.6 volts. The B_1 unit shall be discharged through 3,300 ohms continuously to a test-end voltage of 65.0 volts. The "B_1 and B_2" units connected in series shall be discharged through 2,800 ohms for 2 minutes, then on open circuit for 4 minutes while the "B_1" unit is still connected to the 3,300 ohms resistance. This cycle shall be repeated continuously to a test-end voltage of 105.0 volts.

The discharges on all units shall be started simultaneously for the 2-minute and the 4-minute discharge periods, respectively.

The voltage of the "A" unit and the "B_1 and B_2"units, connected in series, shall be read during the last minute of the 2-minute discharge period; the voltage of the "B_1" unit shall be read during the last minute of the 4-minute discharge period.

Closed circuit voltage - Use the TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use load resistance values as noted below:

A Section	7.995 ohms
B_1 Section	1.292 ohms
B_2 Section	856.2 ohms

TO TEST THIS BATTERY WITH TS-183( )/U:

UNIT	USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
A	5	4.20
B_1	23	84.0
B_2	21	56.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:43Z
Check the source to verify that this is the current version before use.

Custodians:

Army - ER
Navy - SH
Air Force - 99

Review activities:
Army - MI

User activities:

Army - AR
Navy - YD, MC

Preparing activity:
Army - ER

Project Number: (6135-0155-24)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:43Z
Check the source to verify that this is the current version before use.