

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-200/U


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

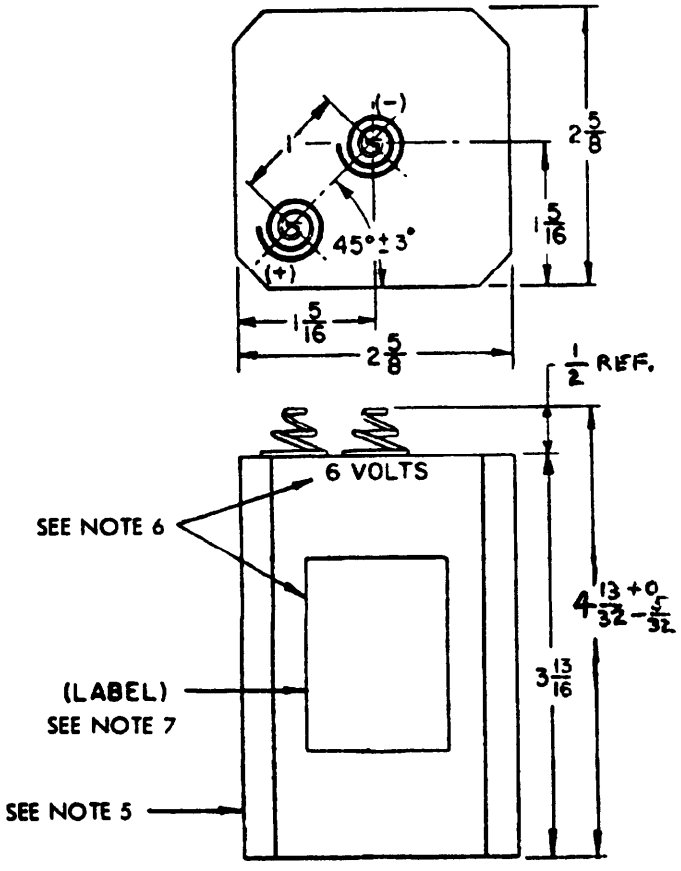

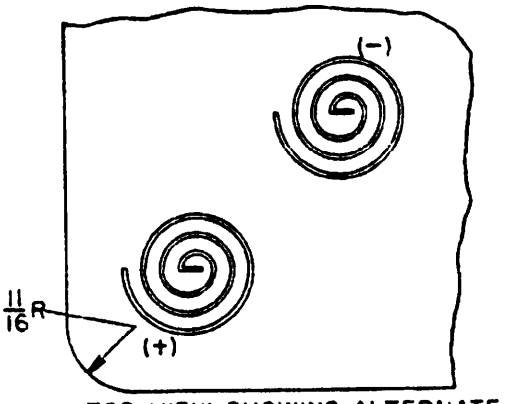

TOP VIEW SHOWING ALTERNATE CORNER CONSTRUCTION

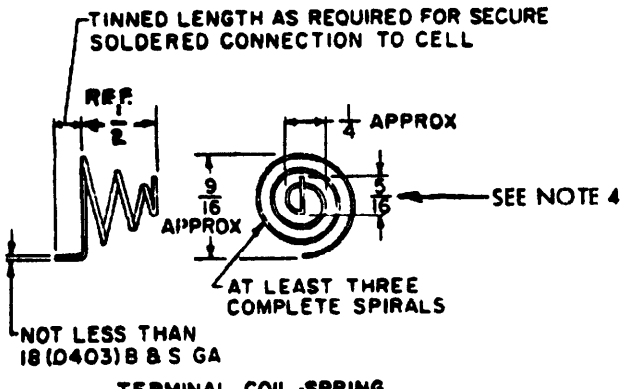

INCHES	MM
1/16	1.59
1/8	3.18
5/32	3.97
1/4	6.35
5/16	7.94
13/32	10.32
1/2	12.70
9/16	14.29
11/16	17.46
1	25.40
1 5/16	33.34
2 5/8	66.68
3 13/16	96.84
4 1/4	107.95

Ⓓ denotes changes

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:44Z
Check the source to verify that this is the current version before use.

FSC-6135

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ±1/16.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. The battery shall pass freely through a cylindrical tube 3.25 inches I.D by 4 inches long.
4. The 5/16 straight portion is optional.
5. A metallic jacket is required.
6. Label and voltage marking shall appear on same side, which may be any one of four.
7. Code date may be shown on bottom of battery with an annotation on the battery label indicating the code date location.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 6 volts.

Usual number and type of cells: 4"F" cells.

Usual cell connection: Series.

Terminals: Two coil springs.

Weight: (Maximum): 1 pound, 8 ounces.

(D) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(D) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(D) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:44Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge - The battery shall be discharged through 40 ohms continuously to a test-end voltage of 4.0 volts.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use a load resistance value of 34.88 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
8	5.60

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:

Army - MI

Project Number: (6135-0155-25)

User activities:
Army - AR
Navy - YD, MC

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:44Z
Check the source to verify that this is the current version before use.