
MIL-B-18/40D
21 May 1985
SUPERSEDING
MIL-B-18/40C
21 August 1976

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-207/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

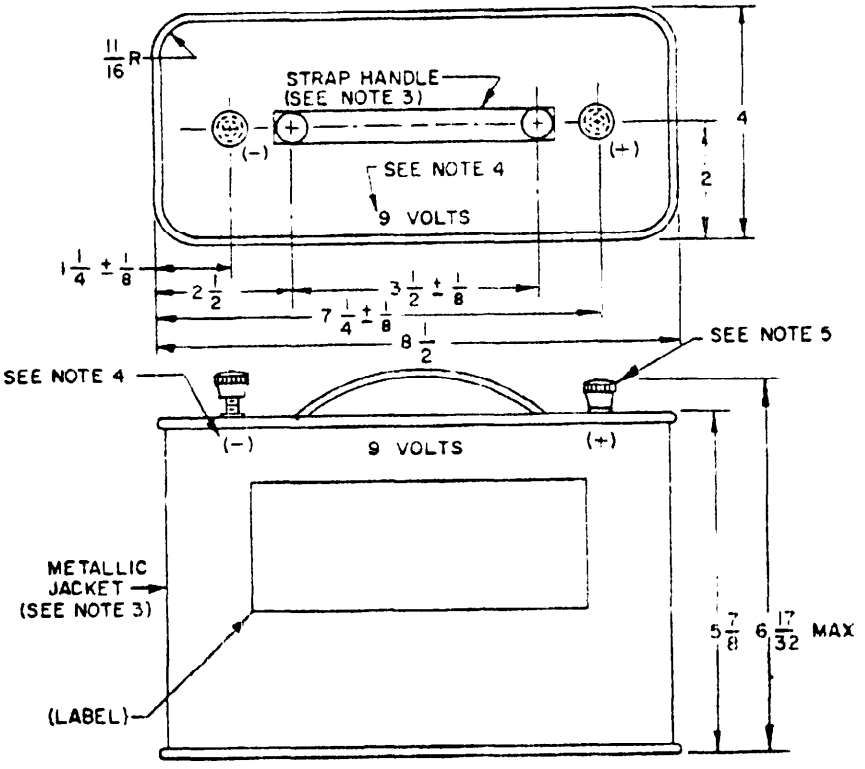

INCHES	MM
1/16	1.59
1/8	3.18
11/16	17.46
1 1/4	31.75
2	50.80
2 1/2	63.50
3 1/2	88.90
4	101.60
5 7/8	149.23
6 17/32	165.89
7 1/4	184.15
8 1/2	215.90

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ±1/16 inch.

(D) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:44Z
Check the source to verify that this is the current version before use.

FSC-6135

NOTES: (Contd)

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

3. For Navy purchases, a metallic or nonmetallic jacket is optional. When a nonmetallic jacket is furnished, the strap handle is not required.

4. Voltage and polarity markings may be placed either on the top or front face of the battery.

5. Insulated knurled nuts with brass inserts are required.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 9 volts .

Usual number and type of cells: 24 "F" cells.

Usual cell connection: Series - parallel.

Terminals: Stud and nut.

Weight (Maximum): 9 pounds, 10 ounces.

(D) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(D) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(D) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 20260-15T16:44Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge - The battery shall be discharged through 16 ohms for 2 periods of 1 hour each, daily. The interval between discharge periods shall be 6 hours and 16 hours respectively. This cycle shall be repeated continuously to a test-end voltage of 5.1 volts.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use a load resistance value of 11.99 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
6	8.40

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:
Army - MI

Project Number: (6135-0155-28)

User activities:
Army - AR
Navy - YD, MC

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:44Z
Check the source to verify that this is the current version before use.