
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-231/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18. (C)

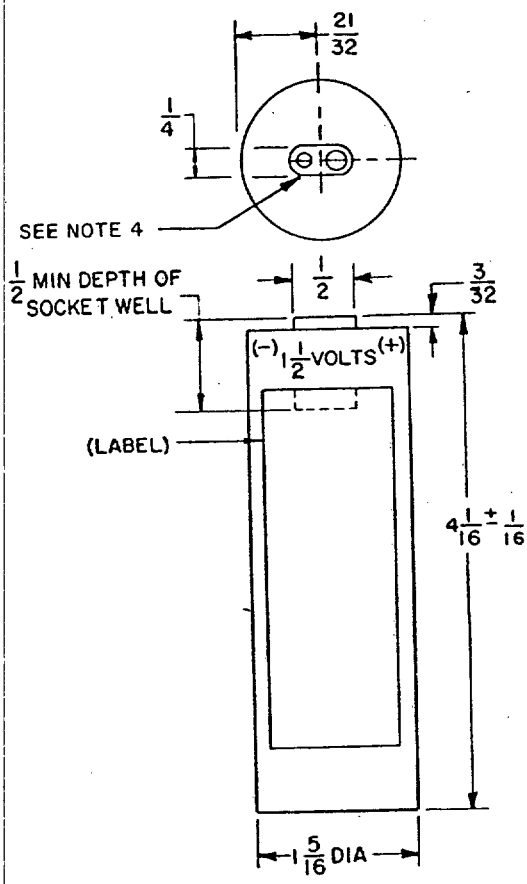

INCHES	MM
1/32	.79
1/16	1.59
3/32	2.38
1/4	6.35
1/2	12.70
21/32	16.67
1 5/16	33.34
4 1/16	103.19

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ±1/32.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. The battery shall be supplied without waterproofing.
4. Socket type I is required. (See general specification for details.) (C)

(C) denotes changes

FSC 6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 1.5 volts.

Number and type of cell: 1 "F" cell.

Terminals: 2-hole socket.

Weight (maximum): 8 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be as specified in Supplement 1.

First Article inspection: (C)

Visual and mechanical (external and internal).
Battery voltage.
Electrolyte leakage.
Waterproofing-of-jacket test. (When applicable)
Capacity, D (without storage).

Quality conformance inspection: (C)

Visual and mechanical (external).
Battery voltage.
Electrolyte leakage.
Waterproofing-of-jacket test. (When applicable)
Capacity, D & T.

Methods of examination and tests: (C)

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	12 months
T	90 days

(C)

Discharge - The battery shall be discharged through 20 ohms for 5 hours per day, 5 days per week. This cycle shall be repeated continuously to a test-end voltage of 0.9 volt.

Electrolyte leakage - The battery shall be discharged through 5 ohms for 24 hours.

(C) Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use a load resistance value of 5.983 ohms.

(C)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:46Z
Check the source to verify that this is the current version before use.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
3	1.40

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodians:
Army - EL
Navy - SH
Air Force - 99

Review activities:
Army - MI

User activities:
Army - PA
Navy - YD, MC

Preparing activity:
Army - EL

(Project 6135-0453)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:46Z
Check the source to verify that this is the current version before use.