
# MILITARY SPECIFICATION SHEET


## BATTERY, DRY, BA-261/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

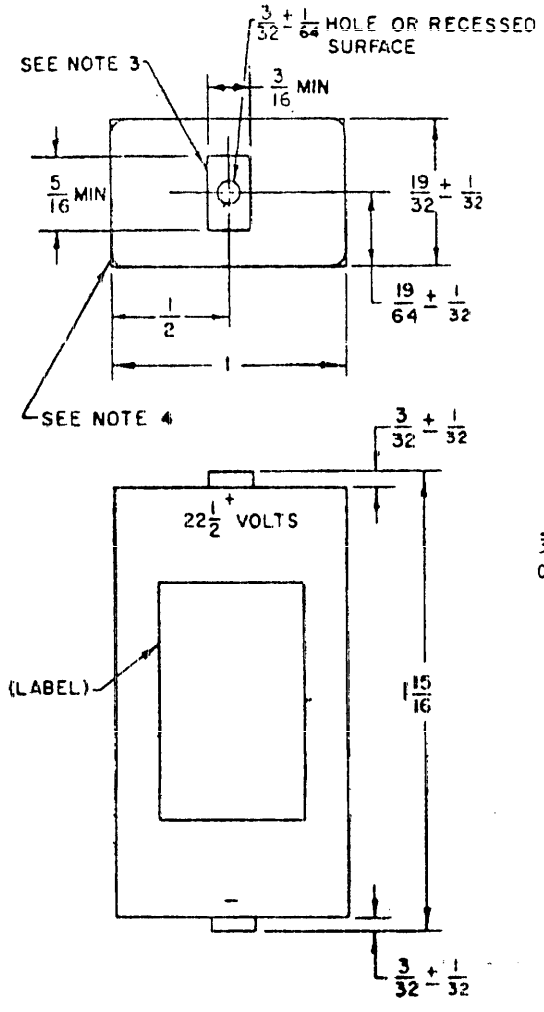


| INCHES | MM |
|---|---|
| 1/64 | .40 |
| 1/32 | .79 |
| 1/16 | 1.59 |
| 3/32 | 2.38 |
| 3/16 | 4.76 |
| © 1/4 | 6.36 |
| 19/64 | 7.54 |
| 5/16 | 7.94 |
| 1/2 | 12.70 |
| 19/32 | 15.08 |
| 1 | 25.40 |
| 1 15/16 | 49.21 |

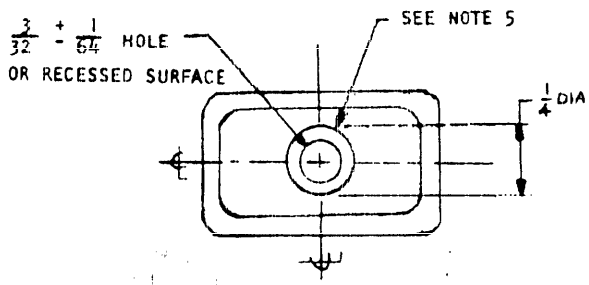


ALTERNATE TERMINAL CONSTRUCTION

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ±1/16.

(D) denotes changes

Source: https://assist.dla.mil -- Downloaded: 202640-15T16:47Z
Check the source to verify that this is the current version before use.



FSC-6135

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

| Storage - | Test | Period |
|---|---|---|
| | D | 12 months |
| | T | 90 days |

Discharge - The battery shall be discharged through 22,500 ohms for 4 hours, then on open circuit for 20 hours. This cycle shall be repeated 5 days per week continuously to a test-end voltage of 17.0 volts.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use a load resistance value of 18,750 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

| USE JACK NO. | MINIMUM PERMISSIBLE VOLTAGE |
|---|---|
| 19 | 20.0 |

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian: (D)
Army - ER
Navy - SH
Air Force - 99

Preparing activity: (D)
Army - ER

Review activities:
Army - EA

Project Number: (6135-0155-42)

User activities:
Army - YD
Navy - MC



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:47Z
Check the source to verify that this is the current version before use.