
MILITARY SPECIFICATION SHEET


BATTERY, DRY, BA-270/U


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

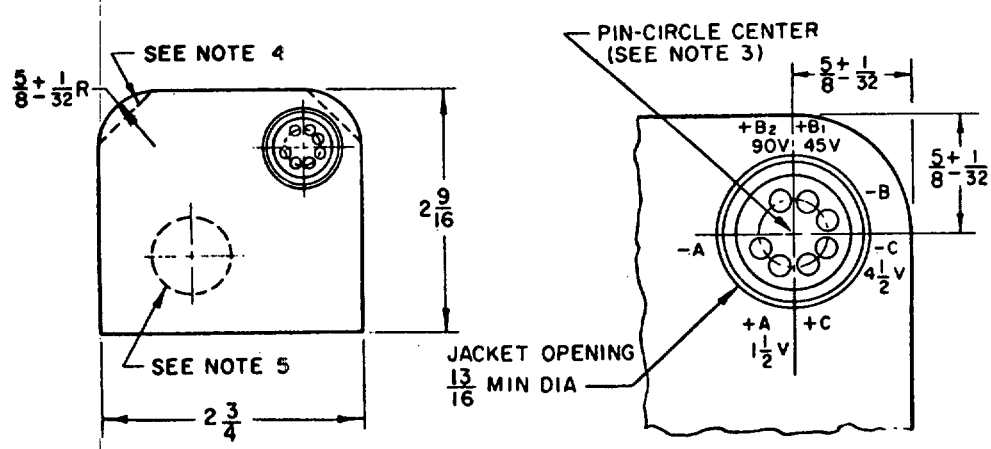

SOCKET PLACEMENT AND VOLTAGE MARKING

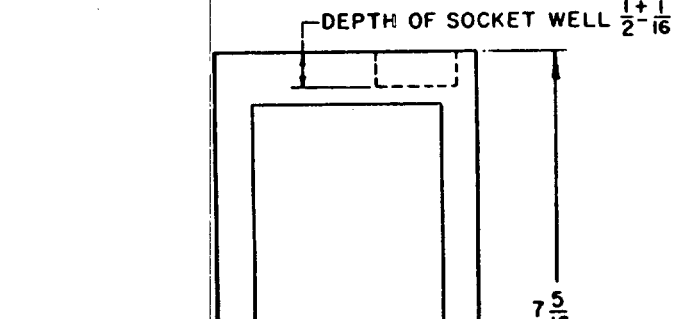



TYPICAL SCHEMATIC

INCHES	MM
1/32	.79
1/16	1.59
3/32	2.38
1/2	12.70
5/8	15.88
13/16	20.64
2 9/16	65.09
2 3/4	69.85
7 5/16	185.74

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is +3/32,-1/16.

(D) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:47Z
Check the source to verify that this is the current version before use.

NOTES: (contd)

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 mm.

3. Electron-tube socket TS102P01 shall be in accordance with MIL-S-12883/2, with the following exceptions:
   (a) Saddle shall be steel, cadmium plated.
   (b) Shield and shield base shall be omitted.
   (c) Contacts and contact tabs shall be cadmium plated.
   (d) Socket face shall be flush with the surface of the jacket or recessed 1/32 maximum below the jacket surface.
4. Diagonal or round corners are optional for the corners indicated.
5. In lieu of terminal markings shown (see socket-placement-and-voltage-marking detail), a printed socket facsimile including terminal markings may be placed in this location, at the option of the supplier.

REQUIREMENTS:	A unit	B_1 unit	B_1 and B_2	C unit
Dimensions and configuration:				
Nominal voltage:	1.5 volts	45 volts	90 volts	-4.5 volts
Usual number and type of cells:	24AA	60 "N"	30 "N" 1/	3 "N"
Usual cell connection:	Parallel	Series - parallel	Series	Series
Terminals: 7-hole socket				
Weight (Maximum) 3 pounds				

1/ B_2 unit only

(D) **Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.**

(D) **First Article inspection:**

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(D) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:47Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	12 months
T	90 days

Discharge - All units shall be discharged concurrently through the resistances listed in load 1 below for 2 minutes, then through the resistances listed in load 2 below for 18 minutes. This cycle shall be repeated continuously to the applicable test-end voltage listed below.

	A unit	B_1 unit	B_1 and B_2 unit	C unit
Resistance:				
Load 1	1.25 ohms	3,750 ohms	2,727 ohms	Open circuit
Load 2	2.5 ohms	3,750 ohms	Open circuit	Open circuit
Test end voltage	1.1 volts	34.0 volts	72 volts	----

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use load resistance values noted below:

A Unit	1.998 ohms
B_1 Unit (-B to $+B_1$)	845.5 ohms
B_2 Unit ($+B_1$ to $+B_2$)	1,267 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U:

UNIT	USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
A	1	1.35
-B to $+B_1$	14	41.4
$+B_1$ to $+B_2$	15	41.4
C	10 (No load)	4.5 1/

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

1/ Minimum permissible voltage with load switch in NO LOAD position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:47Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - SH
Air Force - 99

Review activities:
Army - MI

User activities:
Army - AR
Navy - YD, MC

Preparing activity:
Army - ER

Project Number: (6135-0155-43)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:47Z
Check the source to verify that this is the current version before use.