

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-279/U


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

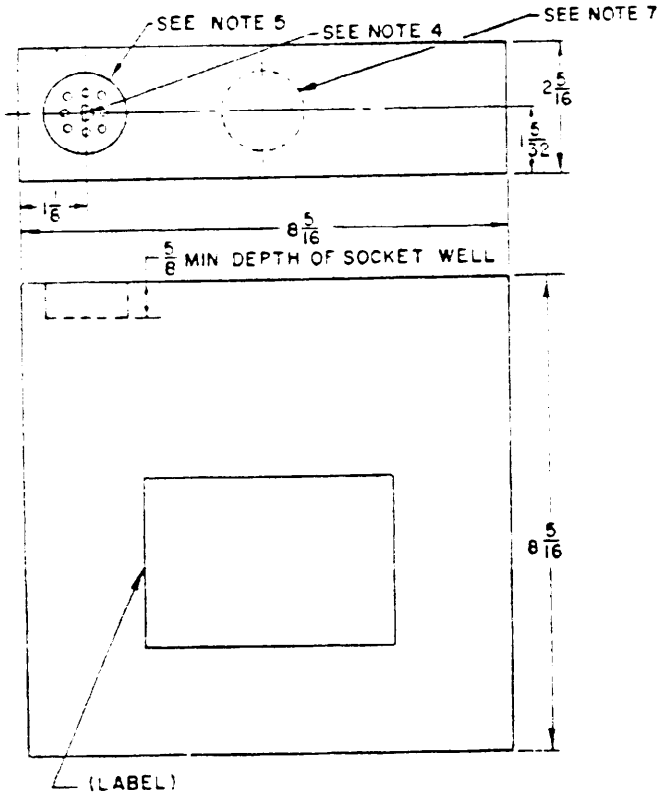


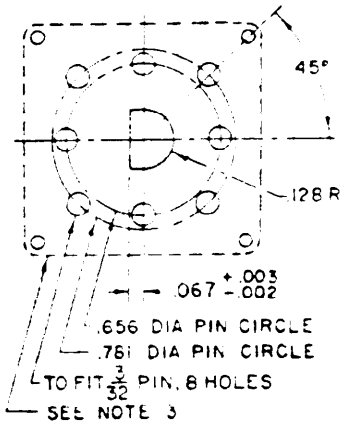

SOCKET DETAIL

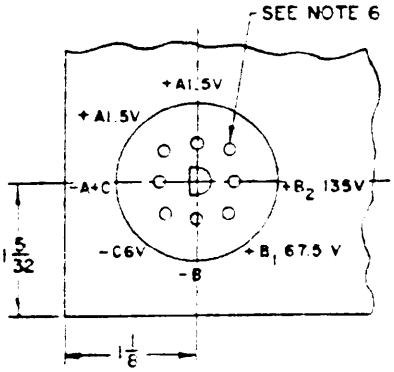

SOCKET PLACEMENT AND VOLTAGE MARKINGS

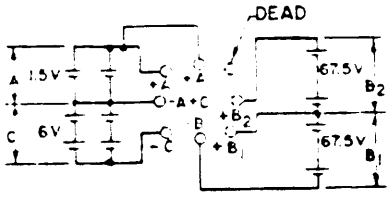

TYPICAL SCHEMATIC

INCHES	MM	INCHES	MM
.002	.05	5/8	15.88
.003	.08	.656	16.66
.005	.13	.781	19.84
.067	1.70	1 1/8	28.58
1/16	1.59	1 1/4	31.75
3/32	2.38	1 5/32	29.37
.128	3.25	2 5/16	58.74
		8 5/16	211.14

(D) denotes changes

FSC-6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:47Z
Check the source to verify that this is the current version before use.

Weight (maximum): 1.2 pounds (0.54 grams).

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerances are ±1/16 on fractions, ±0.005 on decimals, and ±1/2° on angles.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. Insulating plate: size optional.
4. Pin-circle center.
5. The jacket opening shall be 1 1/4 minimum diameter, and shall be positioned so that its center is within a 1/16 diameter circle whose center coincides with the pin-circle center.
6. Socket insert contact is not required for unused pin.
7. In lieu of terminal markings shown (see socket-placement-voltage detail), a printed socket facsimile including terminal markings may be placed in this location at the option of the supplier.

REQUIREMENTS:

Dimensions and configuration: See figure.

	A unit	B_1 unit	B_1 and B_2 unit	C unit
Nominal voltage:	1.5 volts	67.5 volts	135 volts	-6 volts
Usual number and type of cells:	8 "CD"	45 "B"	45 "AA" 1/	8 "C"
Usual cell connection:	Parallel	Series	Series	Series-parallel

1/ B_2 unit only.

Terminals: 8-hole socket.

Weight (maximum): 8 pounds, 8 ounces.

(D) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

Source: https://assist.dla.mil -- Downloaded: 20260-15T16:47Z
Check the source to verify that this is the current version before use.

discharged as follows: [illegible]

(D) First Article Inspection:

Vibration test 1.
Mechanical-shock test 1.
Insulation-resistance test 1.
Visual and mechanical (external and internal).
Battery voltage.
Waterproofing-of-jacket test.
Capacity, D (without storage).

(D) Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Waterproofing-of-jacket test.
Vibration test 1.
Mechanical-shock test 1.
Capacity, D & T

Methods of examination and tests:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	15 months
T	90 days

Discharge - All units shall be discharged concurrently through the resistances listed in load 1 below for 2 minutes, then through the resistances listed in load 2 below for 18 minutes. This cycle shall be repeated continuously to the applicable test-end voltage listed below.

	A unit	B_1 unit	B_1 and B_2 unit	C unit
Resistance:				
Load 1	3.1 ohms	3,910 ohms	2,420 ohms	10.0 ohms
Load 2	2.1 ohms	2,800 ohms	100,000 ohms	6,000 ohms
Test-end voltage	1.1 volts	50.0 volts	100.0 volts	-4.5 volts

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:47Z
Check the source to verify that this is the current version before use.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage specified for TS-183( )/U, use load resistance values as noted below:

A unit (-B to $+B_1$)	1.998 ohms
B unit	995.0 ohms
($+B_1$ to $+B_2$)	
B unit	4.879 ohms
C unit	11.99 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U:

UNIT	USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
A	1	1.35
-B to $+B_1$	22	63.00
$+B_1$ to $+B_2$	27	63.00
C	6	-5.40

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodians:
Army - ER
Navy - SH
Air Force - 99

Review activities:
Army - MI

User activities:
Army - AR
Navy - YD, MC

Preparing activity:
Army - ER

Project Number: (6135-0155-44)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:47Z
Check the source to verify that this is the current version before use.