MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONICS

OSCILLATOR, CRYSTAL, DIGITAL, KEY CODE GVQ

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the procurement of an electronic crystal oscillator module.

* 1.2 Module description. The following electrical parameters reflect the 0° to 60°C and -55° to 100°C end-of-life limits from table I.

Name	Oscillator, crystal
Family	Digital
Key code	GVQ
Size	1A
Weight	35 grams maximum
Environment	Class I or Class II as specified in MIL-STD-1389

	Class I	Class II	Unit
Failure rate	0.263	0.286	Failures/10^6 hours maximum
Power supply	5.0 ±10%	5.0 ±10%	Vdc
Power dissipation (outputs not loaded)	330 max	330 max	mW
Frequency	12.28677 min, 12.28923 max	12.28677 min, 12.28923 max	MHz
Pulse width	36.6 min, 44.8 max	36.6 min, 44.8 max	ns
Propagation delay time (Q to $\overline{Q}$ outputs)			
t_{PLH} (C_L = 130 pF)	2 min, 15 max	2 min, 15 max	ns
t_{PHL} (C_L = 130 pF)	2 min, 15 max	2 min, 15 max	ns
Output voltage			
Low level (I_{OL} = 20 mA)	0.0 min, 0.5 max	0.0 min, 0.5 max	V
High level (I_{OH} = -1 mA)	2.5 min, 4.5 max	2.5 min, 4.5 max	V
Output drive current			
Low level (V_{OL} = 0.5 V)	20 max	20 max	mA
High level (V_{OH} = 2.5 V)	-1 max	-1 max	mA

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Electronic Systems Command, ATTN: ELEX 5043, Department of the Navy, Washington, D.C. 20360, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:50Z
Check the source to verify that this is the current version before use.

* 1.3 Module function. This module contains a 12.28800 MHz square waveform oscillator with both a true and a complement output.

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.
MIL-STD-1665 - Test equipment for the Standard Electronic Modules Program.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.2 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

* 3.3 Failure rate requirements. All modules procured to this specification shall have a predicted failure rate no greater than 0.263 failures per million operating hours for class I or 0.286 failures per million operating hours for class II, when predicted in accordance with MIL-STD-1389. When a class II module is used in a class I environment, failure rate for class I shall be used for reliability prediction (see 6.4).

* 3.4 Performance requirements. The module shall conform to the electrical requirements specified in table I. Class I modules shall conform to the electrical requirements of class I only, and class II modules shall conform to the electrical requirements of class I and class II (see 6.4).

3.5 Module configuration requirements. The module confirguration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.5.1 Key code. The module key code shall be GVQ.

3.5.2 Size. The module size shall be 1A.

3.5.3 Weight. The module shall have a maximum weight of 35 grams.

3.5.4 Contact pins. The module shall have 40 contact pins positioned A1 through A40.

3.5.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A.

3.5.6 Depth. The module shall have no additional depth requirements.

3.5.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

* 3.5.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part number M28787/234-1 for class I and M28787/234-2 for class II, except no marking shall interfere with heat dissipation from the fin (for example, affixing a label which may be a heat barrier).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

3.6 Circuit pin configuration. The function diagram and pin assignments shall conform to figure 1.

3.7 Acceptance test. All production modules shall be tested in accordance with notes 1 and 2 of table I.

3.8 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits of table I (see 6.2).

3.9 Power supply voltage. The module shall be capable of conforming to the requirements of table I for a power supply voltage (V_{CC}) of 5.0 ±0.5 Vdc.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

* 4.3 Test equipment. The following test equipment is necessary to conduct acceptance test for this module. Test equipment shall be as specified in MIL-STD-1665 and that listed below:

Equipment	MIL-STD-1665 designator	No. required (maximum per test figure)
DC power supply	Item P01	2
Counter-timer	Item T01	1
Megohm bridge	Item R06	1
DC ammeter	Item X01	1
Oscilloscope	Item D05	1
Oscilloscope probe	Item Y01	2
Pulse generator	Item J01	1
Resistors		
274Ω ±1%, 1/4 W		2
2.5 kΩ ±1%, 1/8 W		2
Value as required for figure 9, note 4, 1/8 W		2
100Ω ±1%, 1/8 W		1
50Ω ±5%, 1 W		1
Capacitors		
130 pF ±20%		2
Value as required for figure 9, note 2		2
Diode		
1N4150, or equivalent		2


All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified.

4.4 Test procedures. The module shall be tested as specified in table I.

* 4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Program Quality Assurance Activity (SEMP-QAA) and they conform to the requirements of MIL-M-28787.

4.4.2 Order of testing. Test conditions A through N shall be performed in any order with the following exceptions. If test conditions A or B are part of a sequence of tests, the order of testing shall be as follows: A, B where applicable, followed by the remaining tests in the sequence.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:50Z
Check the source to verify that this is the current version before use.

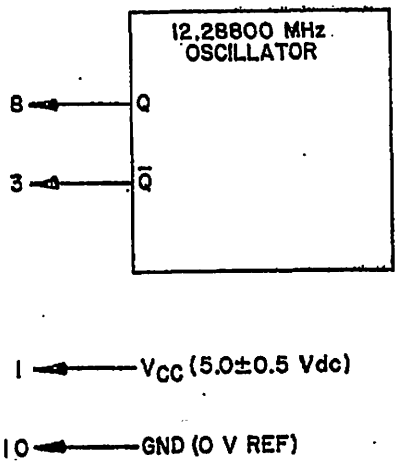

NOTE: Pins 2, 4, 5, 6, 7, 9, and 11 through 40 are not used.

FIGURE 1. GVQ function diagram, crystal oscillator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

* TABLE I. Module electrical requirements.

Test condition	Parameter	Ref test table	Test type 1/-3/	25° ±5°C 4/		Class I 4/				Class II 4/				Unit
						0° ±5°C		60° ±5°C		-55° ±5°C		100° ±5°C		
				Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
A1-A2	V_{CC} stress check	II	S	12.18800	12.38800	12.18800	12.38800	12.18800	12.38800	12.18800	12.38800	12.18800	12.38800	MHz
B1-B2	Isolation	III	S	10	∞	10	∞	10	∞	10	∞	10	∞	MΩ
C	Power supply current	IV	X	6	60	6	60	6	60	6	60	6	60	mA
D1-D4	Frequency check	V	X	12.28677	12.28923	12.28677	12.28923	12.28677	12.28923	12.28677	12.28923	12.28677	12.28923	MHz
E1-E2	Output voltage, high level	VI	X	2.5	4.5	2.5	4.5	2.5	4.5	2.5	4.5	2.5	4.5	V
F1-F2	Output voltage, low level	VI	X	0.0	0.5	0.0	0.5	0.0	0.5	0.0	0.5	0.0	0.5	V
G1-G2	Transition time (t_{TLH}), C_L = 130 pF	VI	X	2	20	2	20	2	20	2	20	2	20	ns
H1-H2	Transition time (t_{THL}), C_L = 130 pF	VI	X	2	20	2	20	2	20	2	20	2	20	ns
J	Propagation delay time (t_{PLH}), Q to $\overline{Q}$, C_L = 130 pF	VI	X	2	15	2	15	2	15	2	15	2	15	ns
K	Propagation delay time (t_{PHL}), Q to $\overline{Q}$, C_L = 130 pF	VI	X	2	15	2	15	2	15	2	15	2	15	ns
L1-L2	Pulse width	VI	X	36.6	44.8	36.6	44.8	36.6	44.8	36.6	44.8	36.6	44.8	ns
M	Power supply transient amplitude	VII	Q	0	400	0	400	0	400	0	400	0	400	mV
N	Power supply filter capacitor check	VIII	S	0.325	0.525	0.325	0.525	0.325	0.525	0.325	0.525	0.325	0.525	V

1/ "X" parameters shall be 100 percent tested during module acceptance tests.
2/ "S" parameters shall be sample acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.
3/ "Q" parameters shall be tested during qualification testing only.
4/ Unless otherwise specified, limits are for initial and end-of-life.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

4.5 Qualification testing. Initial qualification tests and periodic-check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through N in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25° ±5°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions C through N shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2.

4.5.1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 3.

* 4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be operated in the test circuit shown on figure 4. Following the vibration tests, the electrical tests of table I which are marked with and "X" in the test type column, and test condition N, shall be performed using the initial limits at 25° ±5°C ambient.

* 4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests C through N shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements of table I. Following the return of the module to 25°C, electrical tests C through N shall be performed in the order specified in 4.4.2 using the 25° ±5°C ambient end-of-life requirements of table I.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

6. NOTES

6.1 Definitions. Definitions are as specified in MIL-STD-1331.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements of table I, the module is considered to have completed its useful life (see 3.8).

* 6.3 Cross reference of classification. Part number M28787/234-1 supersedes part number M28787/234. The two parts are interchangeable.

6.4 Substitutability. Class II modules are substitutable for class I modules. When class II modules are used in a class I environment, the failure rate for class I shall be used for reliability prediction (see 3.3 and 3.4).


6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire contest irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N110)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

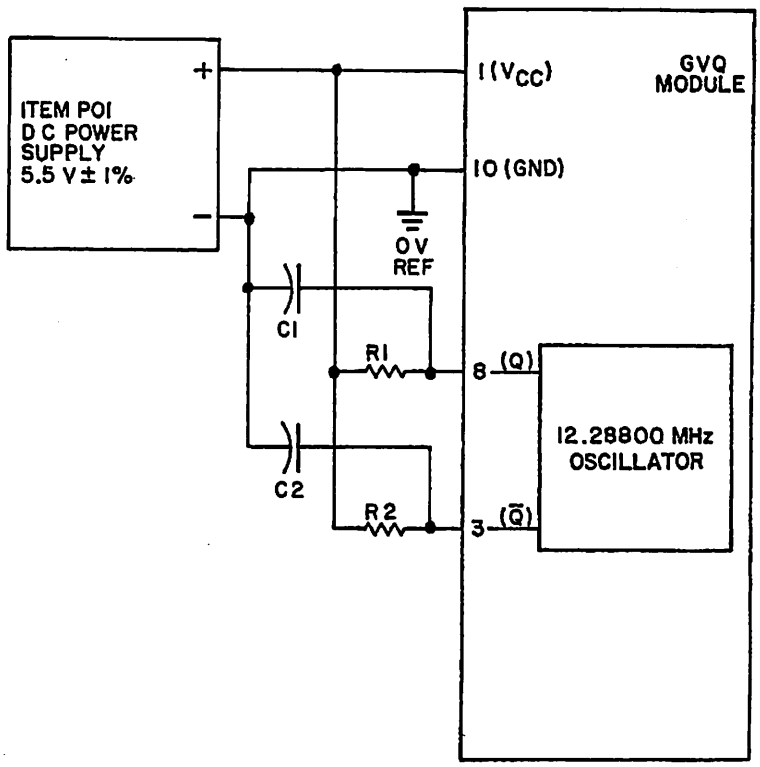

NOTES:
1. R1, R2 = 274Ω ±1%, 1/4 W.
2. C1, C2 = 130 pF ±20%.

FIGURE 2. Operating temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

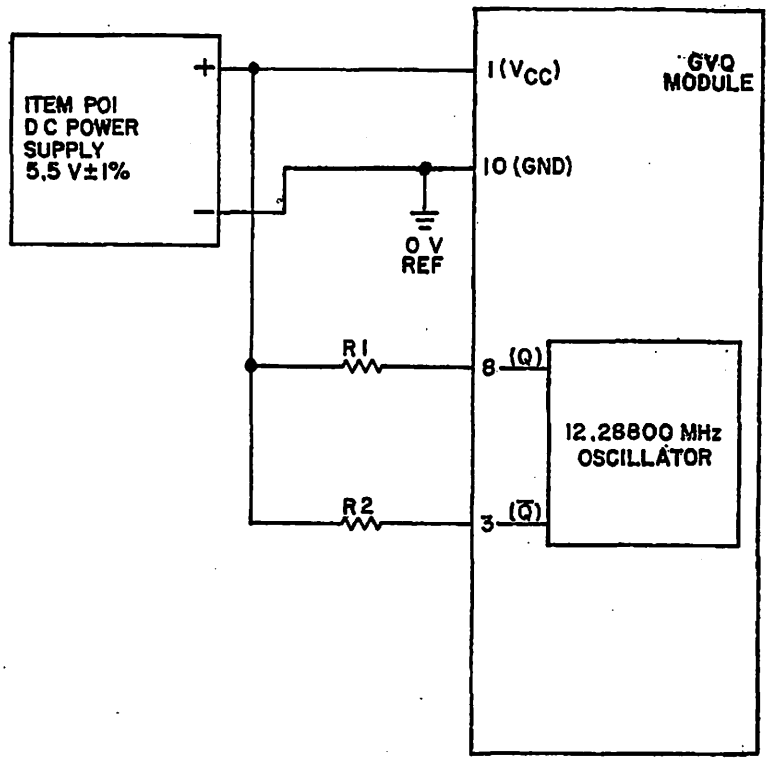

NOTE: R1, R2 = 274Ω ±1%, 1/4 W.

FIGURE 3. Component temperature test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

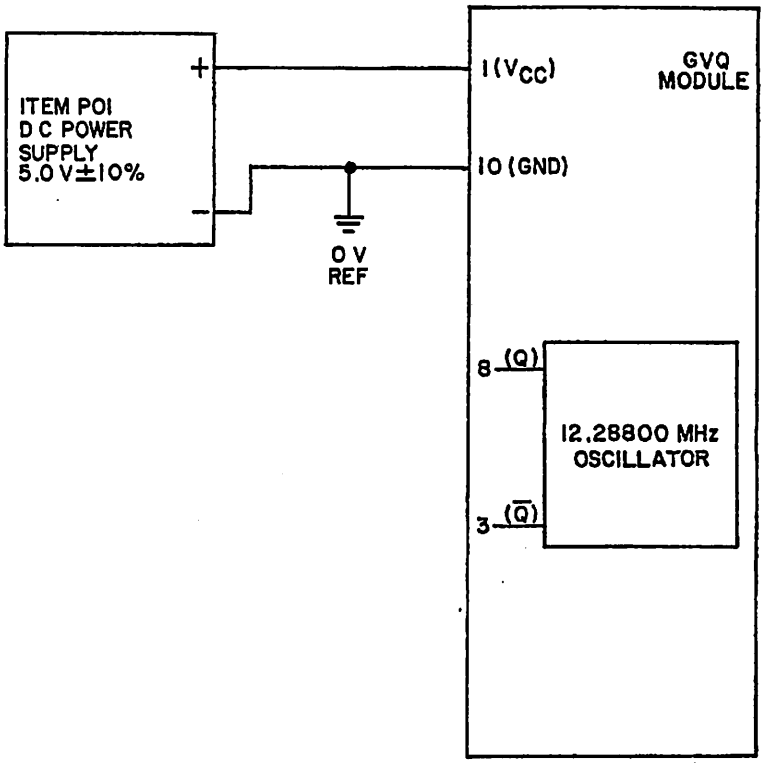


FIGURE 4. Vibration test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

* TABLE II. V_{CC} stress check test.

Test condition	Parameter	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	Min	Max		
A1	Q V_{CC} stress check	8	12.18800	12.38800	MHz	5
A2	$\overline{Q}$ V_{CC} stress check	3	12.18800	12.38800	MHz	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

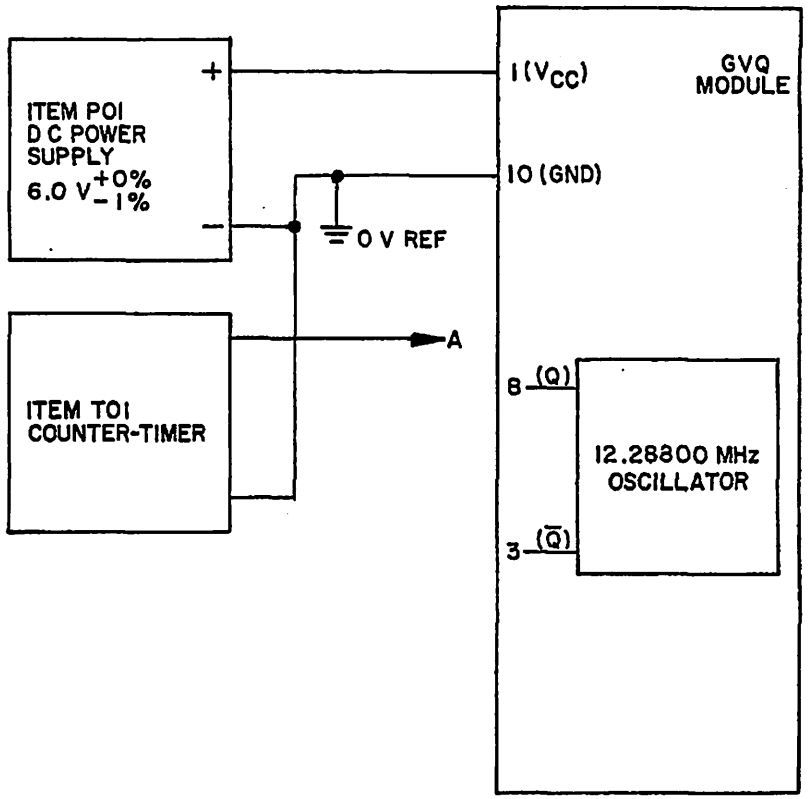



*FIGURE 5. V_{CC} stress check test circuit for table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

TABLE III. Isolation test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
B1	Isolation, used to unused pins	1,3,8,10	All other pins	10	∞	MΩ	6
B2	Isolation, frame to module pins	All pins	Frame	10	∞	MΩ	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

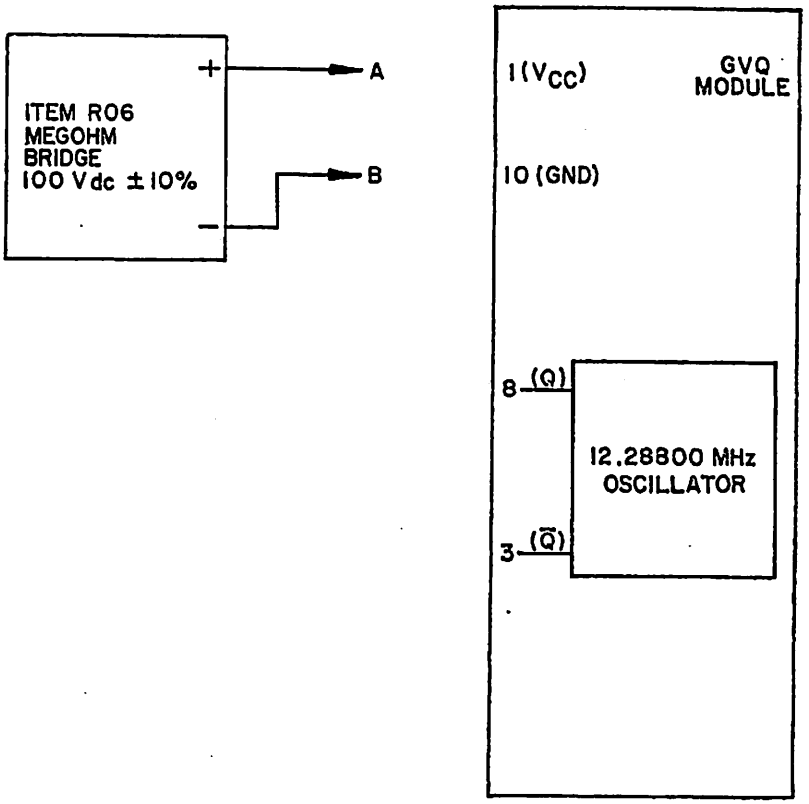

WARNING:

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

NOTE: For test condition B2, penetrate the anodized finish on the module with a sharply pointed probe connected to the negative terminal.


FIGURE 6. Isolation test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

TABLE IV. Power supply current test.

Test condition	Parameter	Initial limits 25° ±5°C Ambient		Unit	Test figure
		Min	Max		
C	Power supply current	6	60	mA	7

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:50Z
Check the source to verify that this is the current version before use.

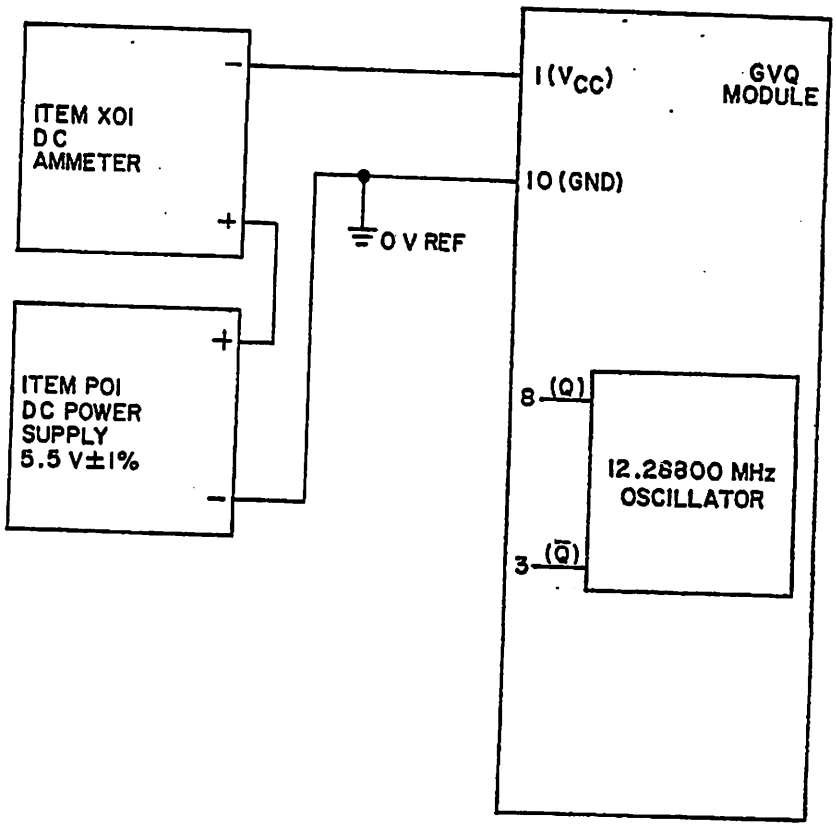

CAUTION:

Do not isolate chassis of ammeter X01 from earth ground.


FIGURE 7. Power supply current test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

TABLE V. Frequency check test.

Test condition	Parameter	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	Min	Max		
D1	Q Frequency check	8	12.28677	12.28923	MHz	8
D2	$\overline{Q}$ ↓	3	↓	↓	↓	↓
D3	Q ↓	8	↓	↓	↓	↓
D4	$\overline{Q}$ Frequency check	3	12.28677	12.28923	MHz	8


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

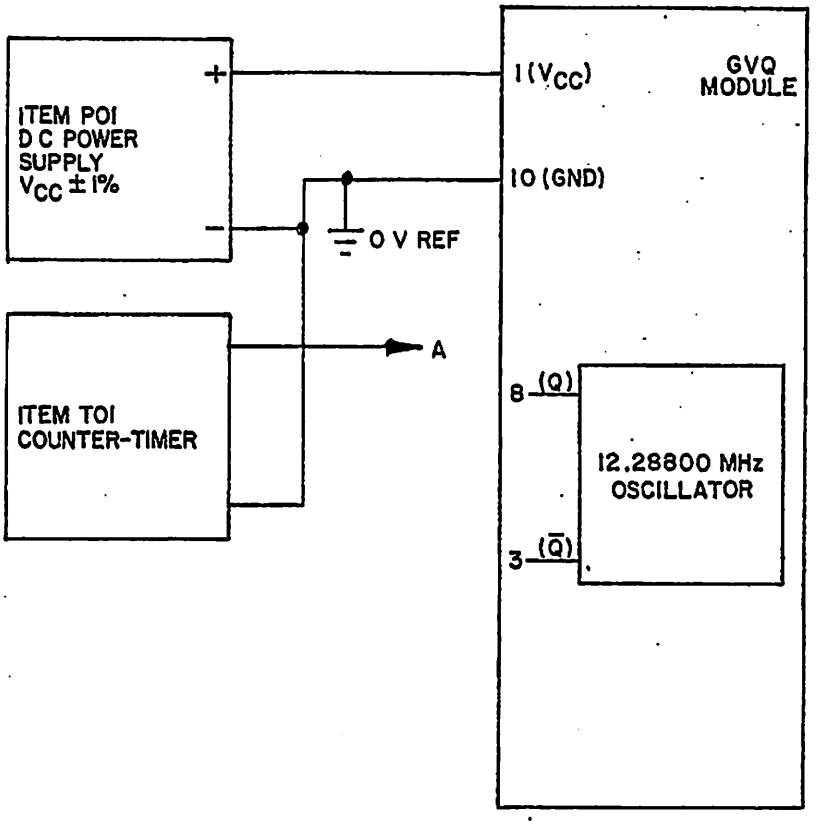

NOTES:
1. For test conditions D1 and D2, V_{CC} = 4.5 V.
2. For test conditions D3 and D4, V_{CC} = 5.5 V.
3. Load each output with a load as specified on figure 9.

FIGURE 8. Frequency check test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:50Z
Check the source to verify that this is the current version before use.

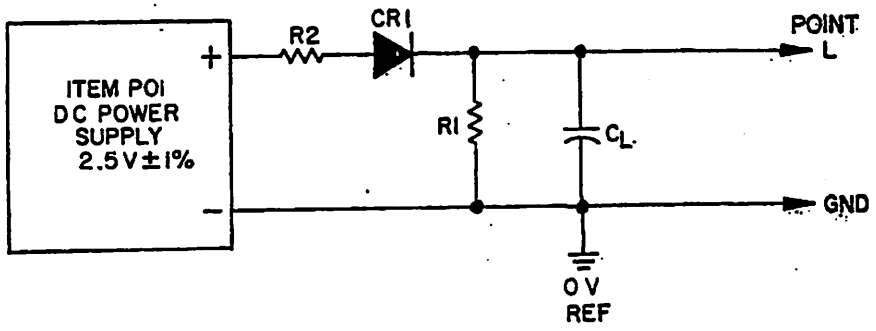

NOTES:
1. CR1 = 1N4150, or equivalent.
2. C_L = 130 ±5 pF (including probe and parasitic capacitance).
3. R1 = 2.5 kΩ ±1%, 1/8 W.
*4. R2 = Select value for current flow of 20 mA ±1% from point L to ground.


FIGURE 9. Logic load circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

TABLE VI. Output voltage (high-level and low-level), transition time (t_{TLH} and t_{THL}), propagation delay time (t_{PLH} and t_{PHL}), and pulse width test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
E1	Q Output voltage, high level	8	Open	2.5	4.5	V	10, 11
E2	$\overline{Q}$ Output voltage, high level	3	↓	2.5	4.5	↓	↓
F1	Q Output voltage, low level	8	↓	0.0	0.5	↓	↓
F2	$\overline{Q}$ Output voltage, low level	3	↓	0.0	0.5	V	↓
G1	Q Transition time (t_{TLH}), C_L = 130 pF	8	↓	2	20	ns	↓
G2	$\overline{Q}$ Transition time (t_{TLH}), C_L = 130 pF	3	↓	↓	↓	↓	↓
H1	Q Transition time (t_{THL}), C_L = 130 pF	8	↓	↓	↓	↓	↓
H2	$\overline{Q}$ Transition time (t_{THL}), C_L = 130 pF	3	Open	↓	20	↓	↓
J	Q to $\overline{Q}$ Propagation delay time (t_{PLH}), C_L = 130 pF	8	3	↓	15	↓	↓
K	Q to $\overline{Q}$ Propagation delay time (t_{PHL}), C_L = 130 pF	8	3	2	15	↓	↓
L1	Q Pulse width (PW)	8	Open	36.6	44.8	↓	↓
L2	$\overline{Q}$ Pulse width (PW)	3	Open	36.6	44.8	ns	10, 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

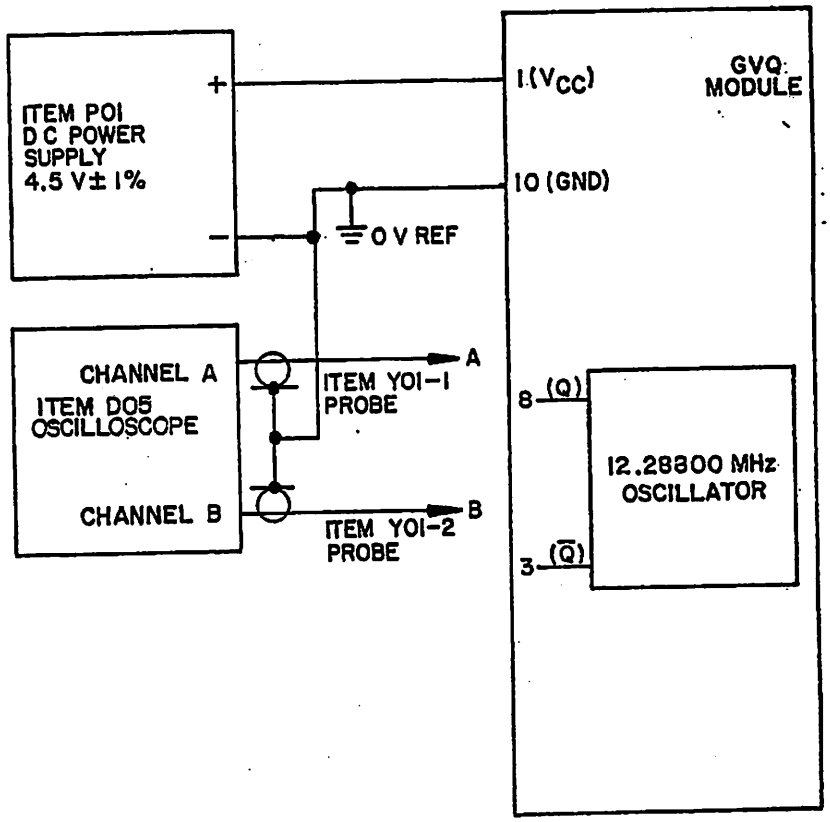

NOTE: Load each output with a load as specified on figure 9.

FIGURE 10. Output voltage (high-level and low-level), transition time (t_{TLH} and t_{THL}), propagation delay time (t_{PLH} and t_{PHL}), and pulse width test circuit for table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

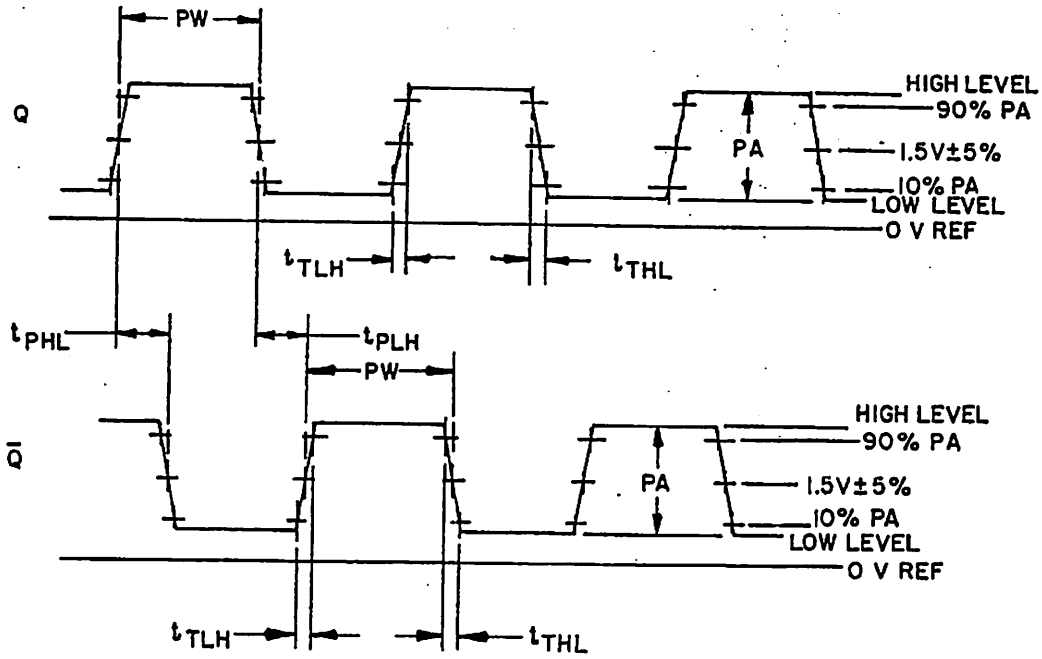



FIGURE 11. Output voltage (high-level and low-level), transition time (t_{TLH} and t_{THL}), propagation delay time (t_{PLH} and t_{PHL}), and pulse width test circuit waveforms for table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

TABLE VII. Power supply transient amplitude test.


Test condition	Parameter	Initial limits 25° ±5°C Ambient		Unit	Test figure
		Min	Max		
M	Power supply transient amplitude	0	400	mV	12, 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

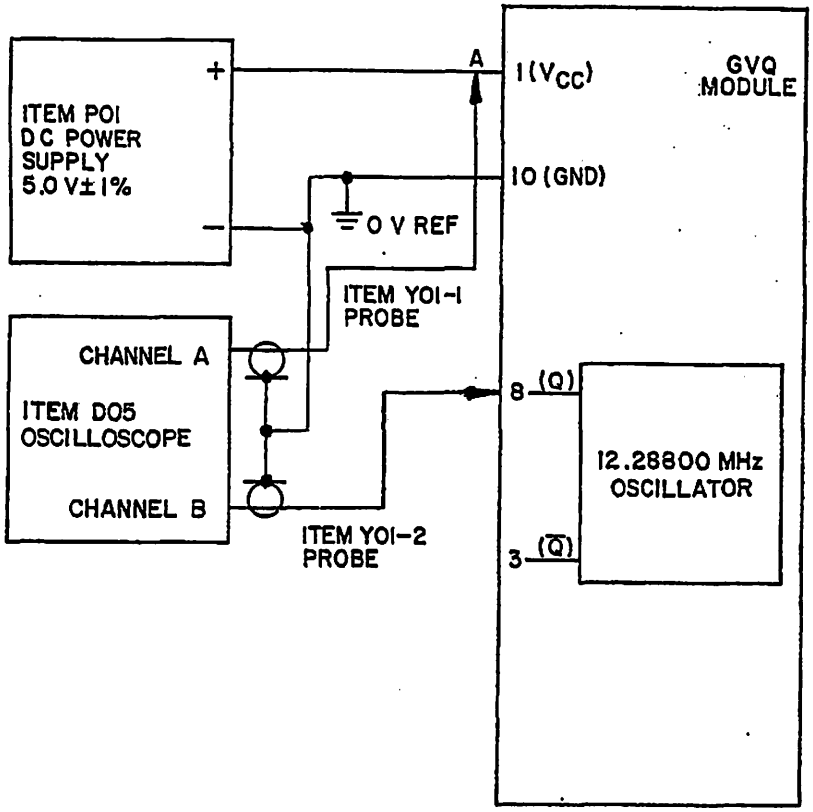

* FIGURE 12. Power supply transient amplitude test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

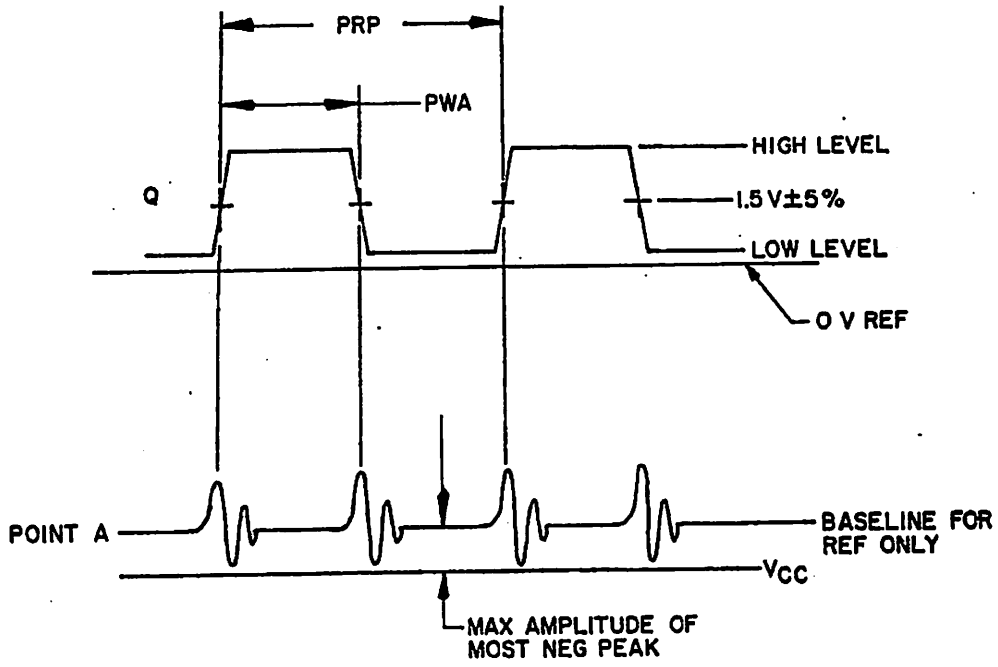

NOTES:
1. PWA = 40.7 ns.
2. PRP = 81.4 ns.


FIGURE 13. Power supply transient amplitude test circuit waveforms for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

TABLE VIII. Power supply filter capacitor check test.

Test condition	Parameter	Initial limits 25° ±5°C Ambient		Unit	Test figure
		Min	Max		
N	Power supply filter capacitor check	0.325	0.525	V	14, 15


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

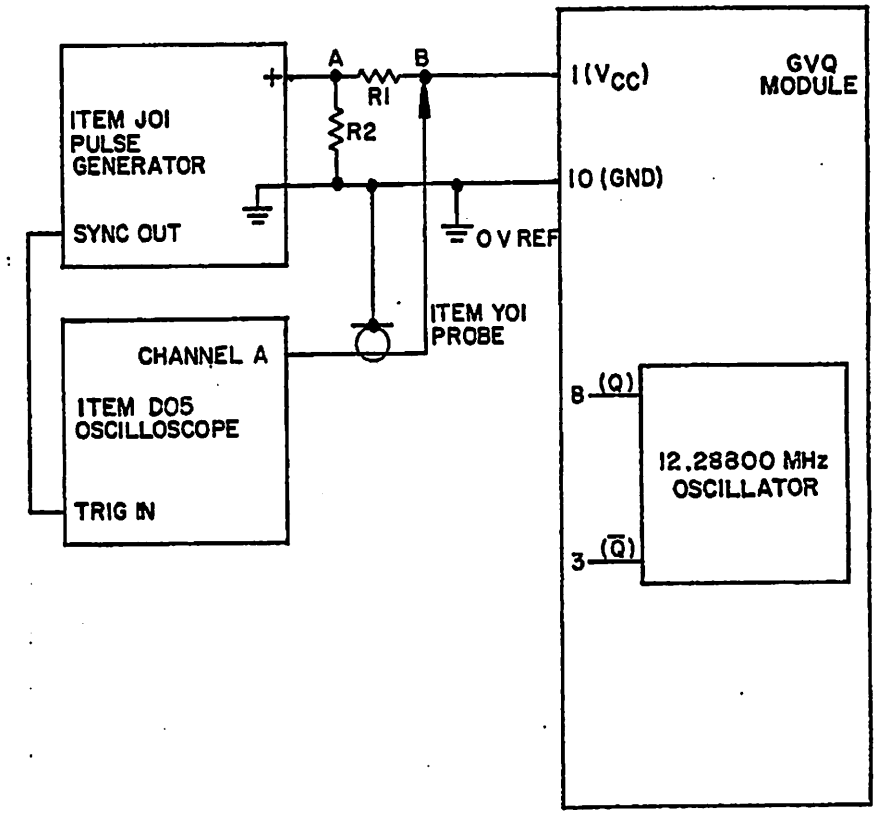

NOTES:
1. R1 = 100Ω ±1%, 1/8 W.
2. R2 = 50Ω ±5%, 1 W.

FIGURE 14. Power supply filter capacitor check test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

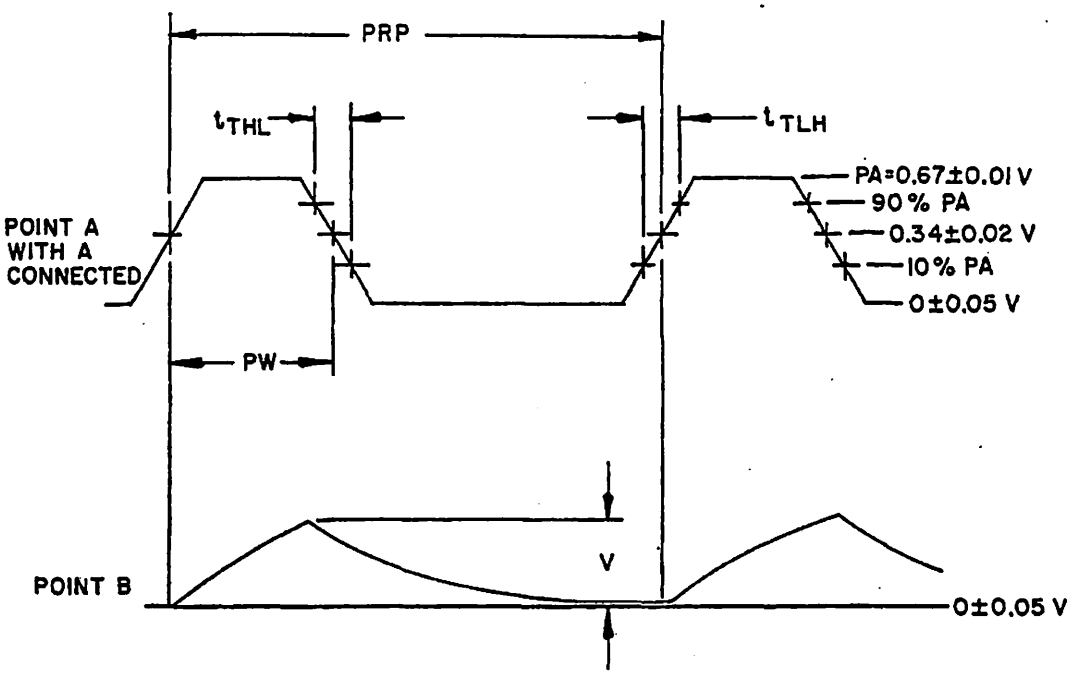

NOTES:
1. PW = 1.5 ±0.1 μs.
2. $t_{TLH} = t_{THL}$ = 25 ±10 ns.
3. PRP = 15 ±1.5 μs.
4. V = peak voltage measurement.

FIGURE 15. Power supply filter capacitor check test circuit waveforms for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.