|INCH-POUND|

MIL-M-28787/239A
AMENDMENT 2
30 July 1993
SUPERSEDING
AMENDMENT 1
12 December 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

DRIVER, NTDS SLOW, DIGITAL, KEY CODE QBQ

This amendment forms a part of Military Specification MIL-M-28787/239A(EC), dated 3 July 1978, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Bottom right side of page: Delete "FSC MISC" and substitute "FSC 5963".

PAGE 2

1.3: Delete first sentence in its entirety.

PAGE 4

3.5.8, second line: Delete "M28787/239" and substitute "M28787/239-1".

PAGES 4 AND 5

4.3: Delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

AMSC N/A FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:52Z
Check the source to verify that this is the current version before use.

PAGE 5

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through U shall be performed in any order with the following exceptions. Test conditions A, B, C, and D are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, or D are part of a sequence of tests, the order of testing shall be as follows: A, B, C, and D where applicable, followed by the remaining tests in the sequence."

*4.5.3: Delete and substitute the following:

"4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests E through Q shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table I. Following the return of the module to 25 ± 5°C, electrical tests E through Q shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table I."

PAGE 9

Add the following new paragraph:

"6.5 Cross reference of classification. Part number M28787/239-1 supersedes part number M28787/239. The two parts are interchangeable."

PAGE 16

FIGURE 6: Delete and substitute new figure 6 as printed on page 4 of this amendment.

PAGE 22

FIGURE 9: Delete and substitute new figure 9 as printed on pages 5 and 6 of this amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:52Z
Check the source to verify that this is the current version before use.

PAGE 29

FIGURE 13: Delete and substitute new figure 13 as printed on page 7 of this amendment.


Custodians:
Army - ER
Navy - NW
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0196)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:52Z
Check the source to verify that this is the current version before use.

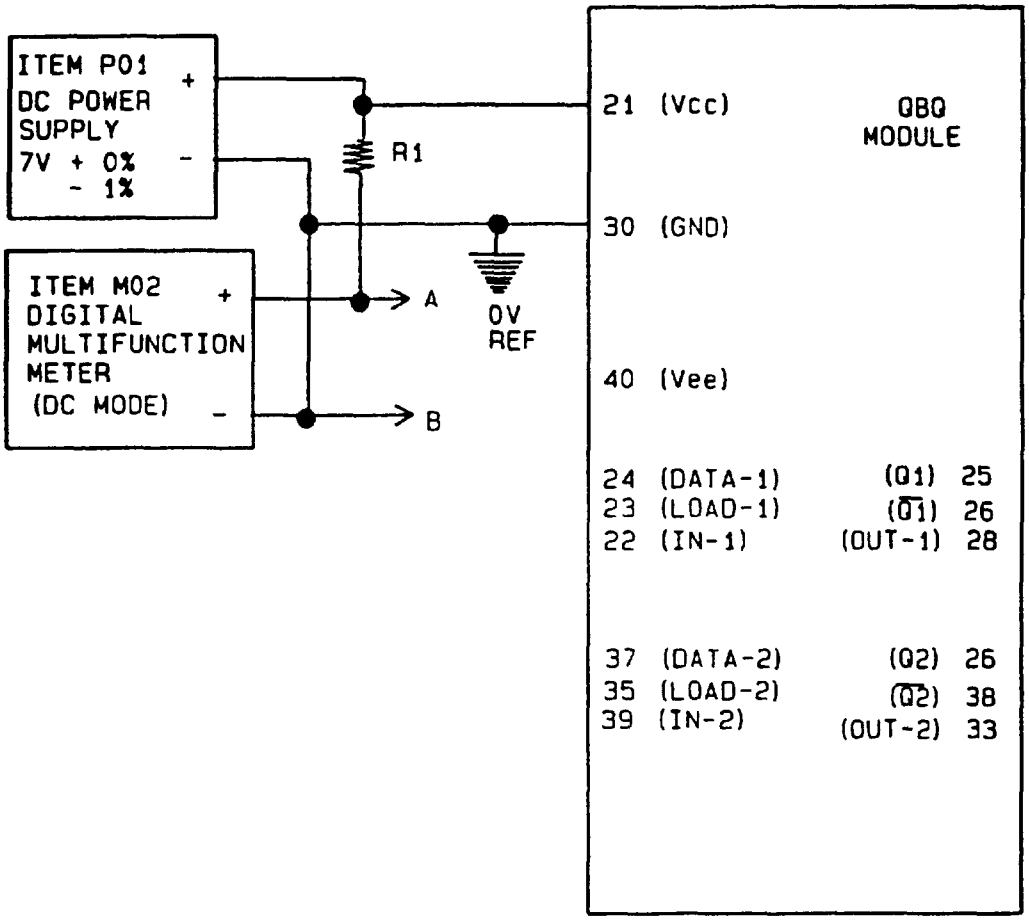

NOTES:
1. R1 = 536 Ohm ± 1%, 1/4W.
2. After point A has been connected to the appropriate module pin, monitor the output for a minimum of 10 seconds before making the measurement.

FIGURE 6. Vout (low-loaded) test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:52Z
Check the source to verify that this is the current version before use.

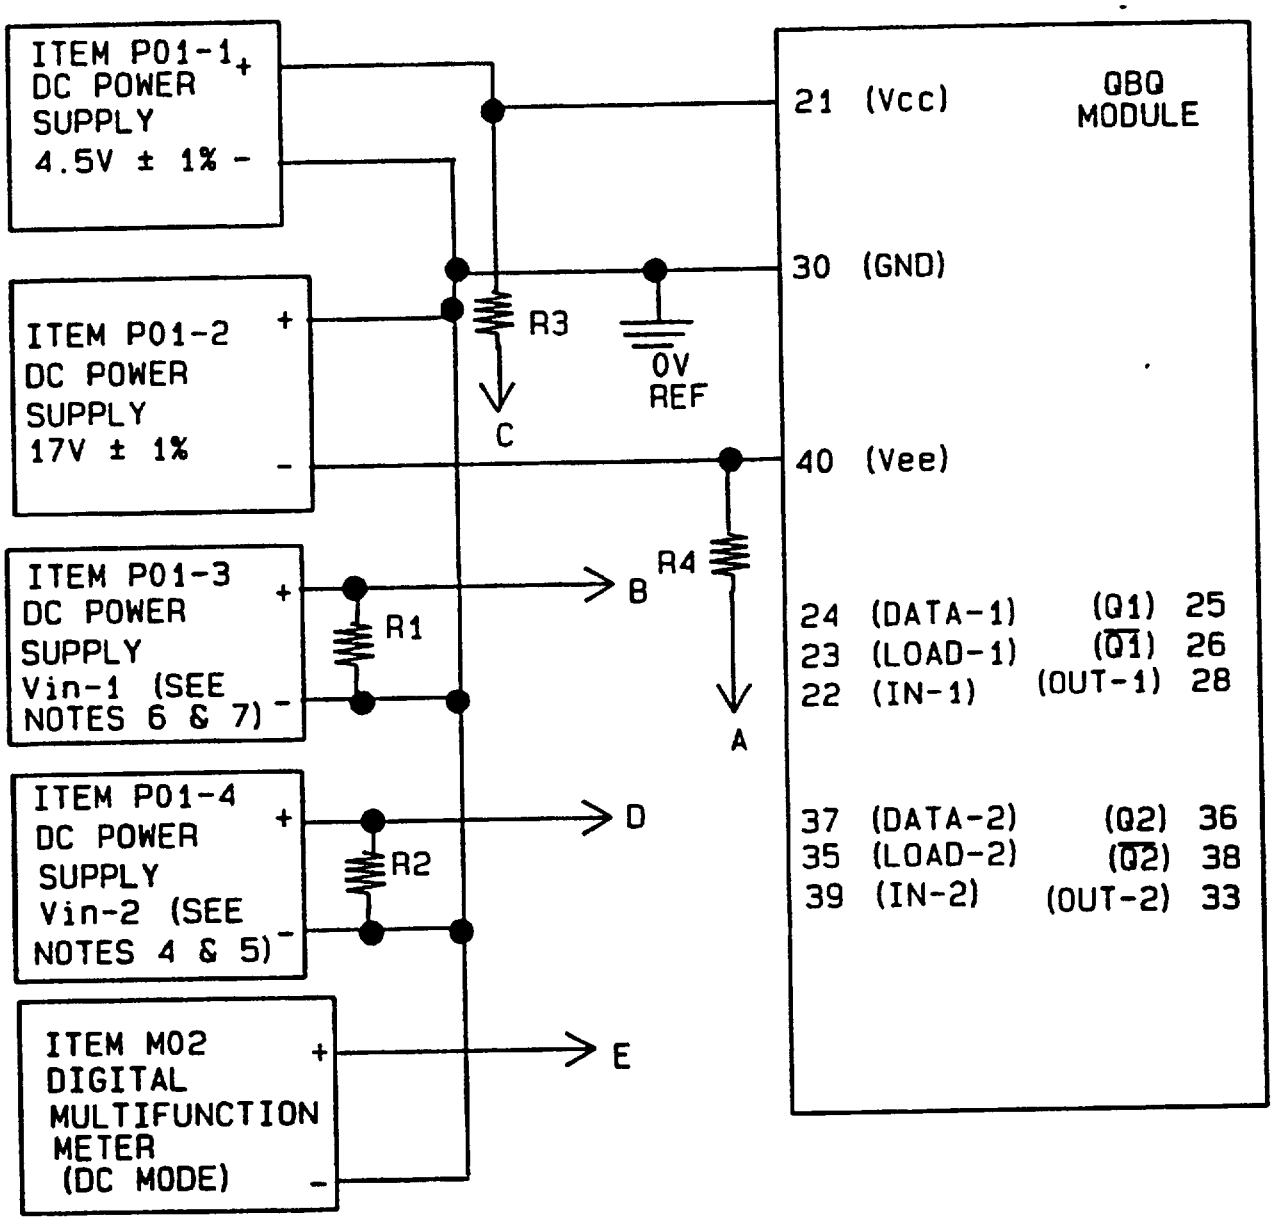


FIGURE 9. Output voltage (low-level and high-level) test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:52Z
Check the source to verify that this is the current version before use.

NOTES:

1. R1 = R2 = 51 Ohm ± 5%, 1W.

2. R3 = 3.65 kOhm ± 1%, 1/8W.

3. R4 = 976 Ohm ± 1%, 1/2W.

4. For test conditions E1, E3, F2 and F4:
   Vin-2 = 0.8V ± 1%.

5. For test conditions F5 and F6:
   Vin-2 = 0.7V ± 1%.


6. For test conditions E1-E4 and F1-F4:
   Vin-1 = 2.0V ± 1%.

7. For test conditions E5 and E6:
   Vin-1 = 3.5V ± 1%.

8. Load Q and $\overline{Q}$ outputs of circuit under test with a load as specified on figure 10.

FIGURE 9. Output voltage (low-level and high-level) test circuit for table VII - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:52Z
Check the source to verify that this is the current version before use.

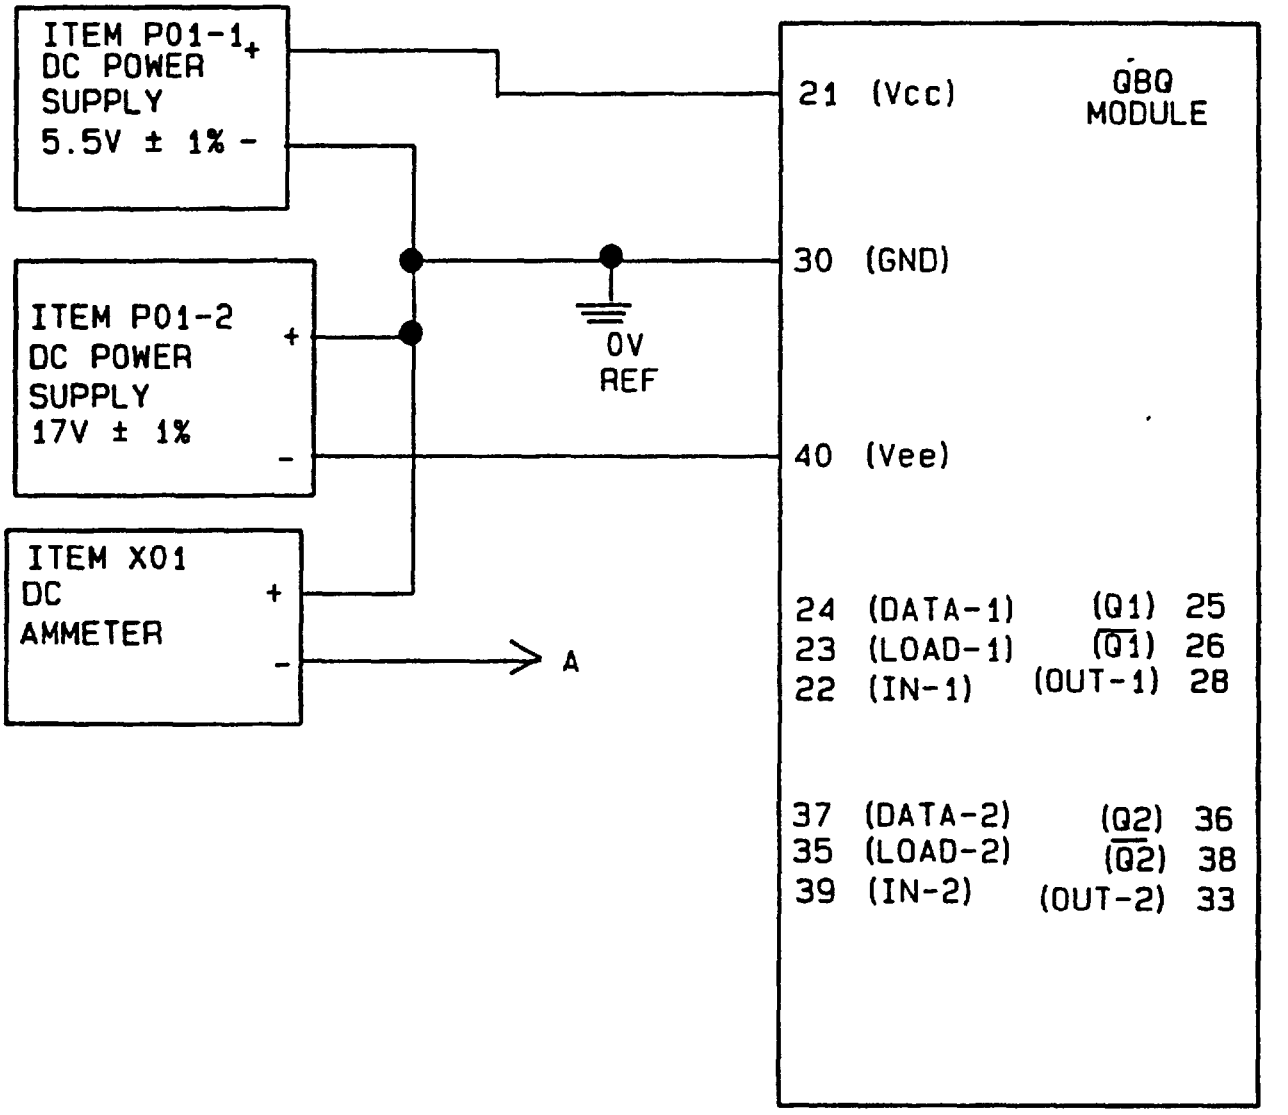

CAUTION:
Do not isolate the chassis of ammeter X01 from earth ground.

FIGURE 13. Input current (low-level) test circuit for table X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:52Z
Check the source to verify that this is the current version before use.