INCH-POUND

MIL-M-28787/241
AMENDMENT 1
16 December 1992

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

DRIVER, INTERFACE, NTDS (ANEW), KEY CODE QDR

This amendment forms a part of Military Specification MIL-M-28787/241(EC), dated 11 May 1979, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 5

TABLE II, Test conditions B1-B10, Max columns: Delete "0.1" (4 places) and substitute "1.0" (4 places).

TABLE II, Test conditions C1-C19, Test type column: Delete "X" and substitute "S".

TABLE II, Test conditions E1-E4, Test type column: Delete "X" and substitute "S".

TABLE II, Test conditions F1-F8, Min columns: Delete "0" (four places) and substitute "-0.2" (four places).

TABLE II, Test conditions M1, M3, M5, M7, Min columns: Delete "-0.1" (four places) and substitute "0.5" (four places).

TABLE II, Test conditions M2, M4, M6, M8, Min columns: Delete "-0.1" (four places) and substitute "0.3" (four places).

PAGE 6

TABLE II, Test condition N1, Test type column: Delete "S" and substitute "X".

TABLE II, Test condition N2, Test type column: Delete "S" and substitute "X".

TABLE II, Test condition N1, Min columns: Delete "40" (four places) and substitute "15" (four places).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.

TABLE II, Test conditions Q1-Q4, Min columns: Delete "5" (four places) and substitute "4" (four places).

TABLE II, Test conditions R1-R4, Min columns: Delete "5" (four places) and substitute "4" (four places).

TABLE II, Test conditions W1-W4, Max columns: Delete "400" (four places) and substitute "600" (four places).

PAGE 7

TABLE II, Test condition X, Max columns: Delete "400" (four places) and substitute "750" (four places).

TABLE II, Test conditions Z1-Z8, Max columns: Delete "15.0" (four places) and substitute "30.0" (four places).

PAGE 8

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through Z shall be performed in any order with the following exceptions. Test conditions A, C, E, and F are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, C, E or F are part of a sequence of tests, the order of testing shall be as follows: A, C, E, and F where applicable, followed by the remaining tests in the sequence."

PAGE 9

4.5.1: Delete and substitute the following:

"4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through Z in table II shall be performed in the order specified in 4.4.2 using the initial limits at 25°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions B, D, G through N, P1 through P4, Q1 through Q4, R1 through R4, S1 through S4, T, U, and Y shall be performed in the order specified in 4.4.2 using the initial limits for the applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2."

4.5.3: Delete and substitute the following:

"4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.

Following the life test and while still at the maximum class temperature, electrical tests B, D, G through N, P1 through P4, Q1 through Q4, R1 through R4, S1 through S4, T, U, and Y shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table II. Following the return of the module to 25 ± 5°C, electrical tests B, D, G through N, P1 through P4, Q1 through Q4, R1 through R4, S1 through S4, T, U, and Y shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table II."

PAGE 16

TABLE IV, Test conditions B1-B10, Max columns: Delete "0.1" (two places) and substitute "1.0" (two places).

PAGE 25

TABLE VIII, Test conditions F1, F2, F3, F4, F5, F6, F7, and F8, Min column: Delete "0.0" (two places) and substitute "-0.2" (two places).

PAGE 36

TABLE XIV, Test conditions M1, M3, M5, and M7, Min column: Delete "-0.1" and substitute "0.5".

TABLE XIV, Test conditions M2, M4, M6, and M8, Min column: Delete "-0.1" and substitute "0.3"

PAGE 38

TABLE XV, Test condition N1, Min column: Delete "40" and substitute "15".

PAGE 39

FIGURE 17: Delete and substitute new figure 17 as printed on page 4 of this amendment.

PAGE 40

TABLE XVI, Test conditions Q1, Q2, Q3, and Q4, Min column: Delete "5" and substitute "4".

PAGE 42

TABLE XVII, Test conditions R1, R2, R3, and R4, Min column: Delete "5" and substitute "4".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.

PAGE 49

TABLE XIX, Test conditions W1, W2, W3, and W4, Max column: Delete "400" and substitute "600".

PAGE 52

TABLE XX, Test condition X, Max column: Delete "400" and substitute "750".

PAGE 56

FIGURE 26: Delete and substitute new figure 26 as printed on page 6 of this amendment.

PAGE 57

TABLE XXII, Test conditions Z1, Z2, Z3, Z4, Z5, Z6, Z7, and Z8, Max column: Delete "15" and substitute "30".


Custodians:
Army - ER
Navy - SH
Air Force - 85

Preparing activity:
Navy - NW

(Project 5963-0198)

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.

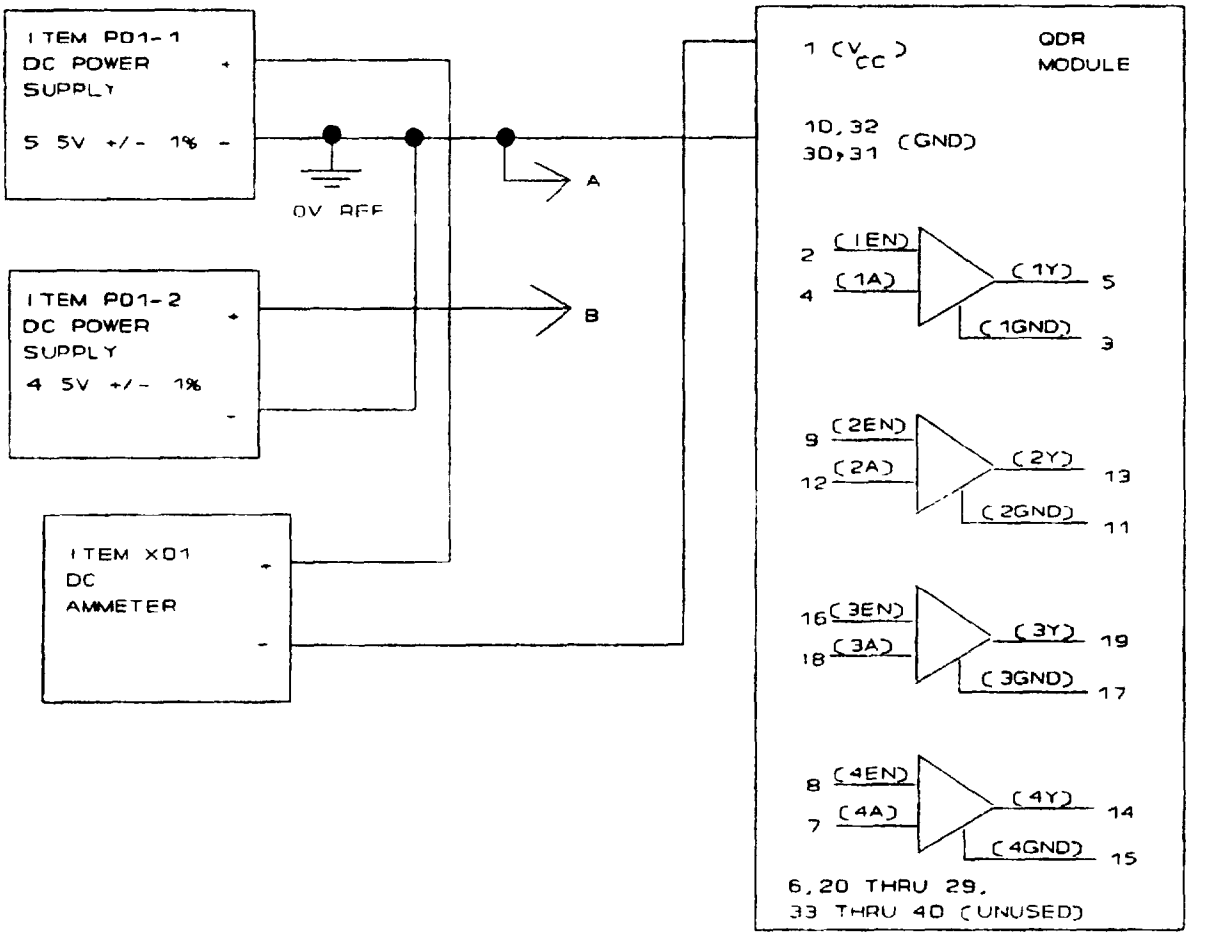

CAUTION: Do not isolate the chassis of ammeter X01 from earth ground.

FIGURE 17. Power supply current (low-level and high-level outputs) test circuit for table XV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.

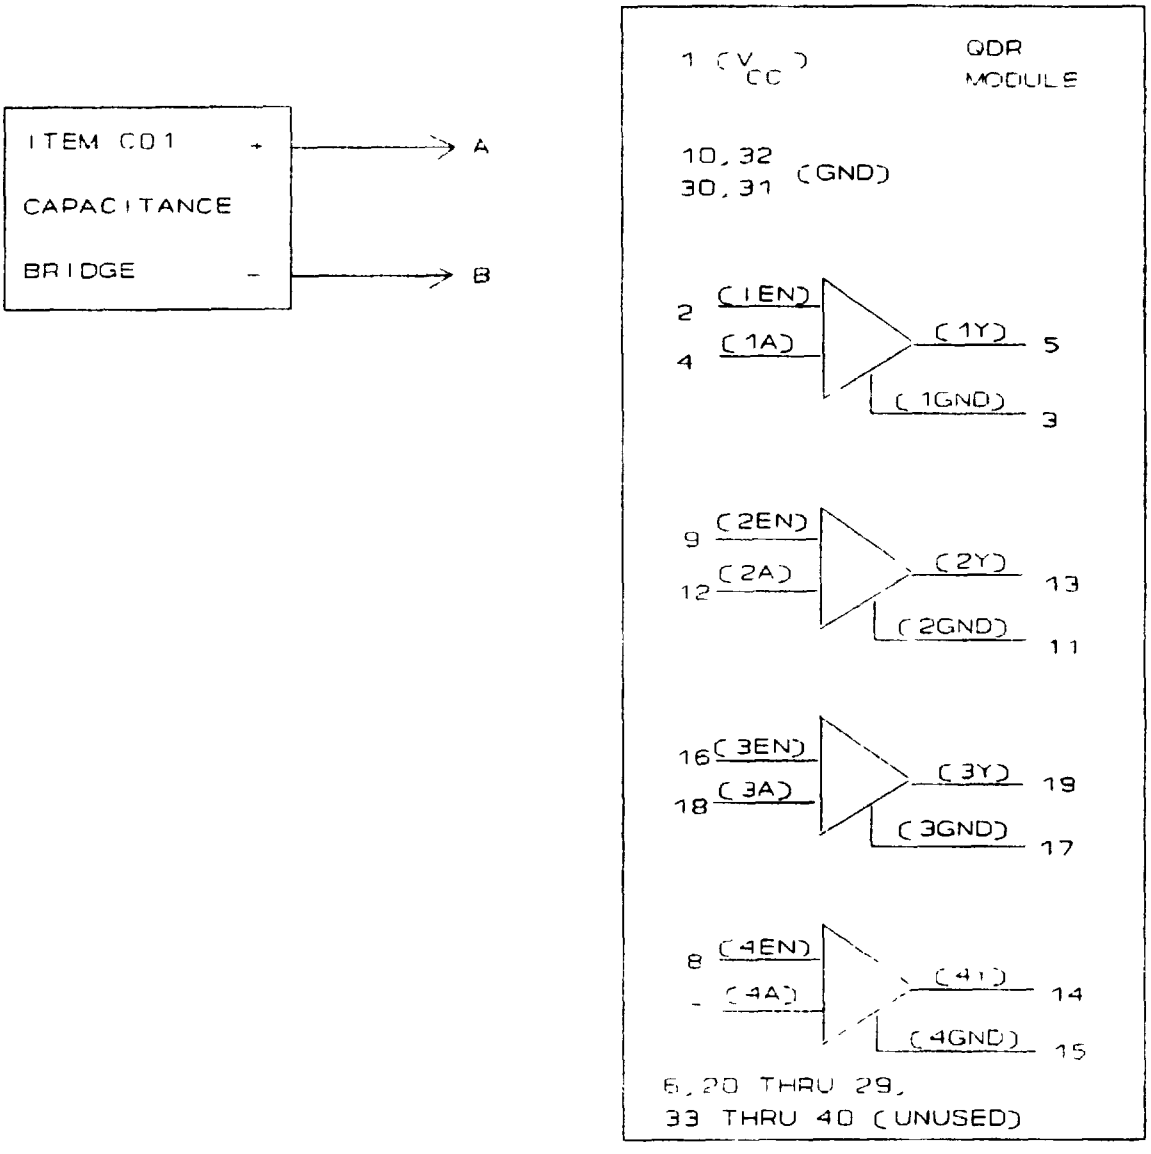

NOTE: **Item C01 setup:**
V_{pk} = 0.3 V maximum.
Frequency = 1 kHz ± 10 percent.

FIGURE 26. Power supply filter capacitance test circuit for table XXI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:53Z
Check the source to verify that this is the current version before use.