INCH-POUND

MIL-M-28787/246B(EC)
AMENDMENT 1
25 May 1994

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

OPTICAL ISOLATOR, DIGITAL, KEY CODE MUM

This amendment forms a part of Military Specification MIL-M-28787/246B(EC), dated 16 April 1986, and is approved for use by the Crane Division, Naval Surface Warfare Center, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 20

TABLE VI: Delete and substitute new table VI as printed on page 2 of this amendment.

PAGE 21

FIGURE 10: Delete and substitute new figure 10 as printed on page 3 of this amendment.

Preparing activity:
Navy - NW

(Project 5963-N859)


AMSC N/A FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:01Z
Check the source to verify that this is the current version before use.

TABLE VI. Output leakage current and input threshold current test.

Test cond	Parameter	Connect A to pin	Connect Point B to	Initial limits 25° ± 5°C ambient Min	Initial limits 25° ± 5°C ambient Max	Unit	Test figure
E1	Output leakage current	37	C	0	40	µA	10
E2		36					
E3		34					
E4		16					
E5		27					
E6		5					
E7		24					
E8	Output leakage current	25	C	0	40	µA	
E9	Input threshold current (If = 2mA)	37	D	0.1	2.2	mA	
E10		36					
E11		34					
E12		16					
E13		27					
E14		5					
E15		24					
E16	Input threshold current (If = 2mA)	25	D	0.1	2.2	mA	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:01Z
Check the source to verify that this is the current version before use.

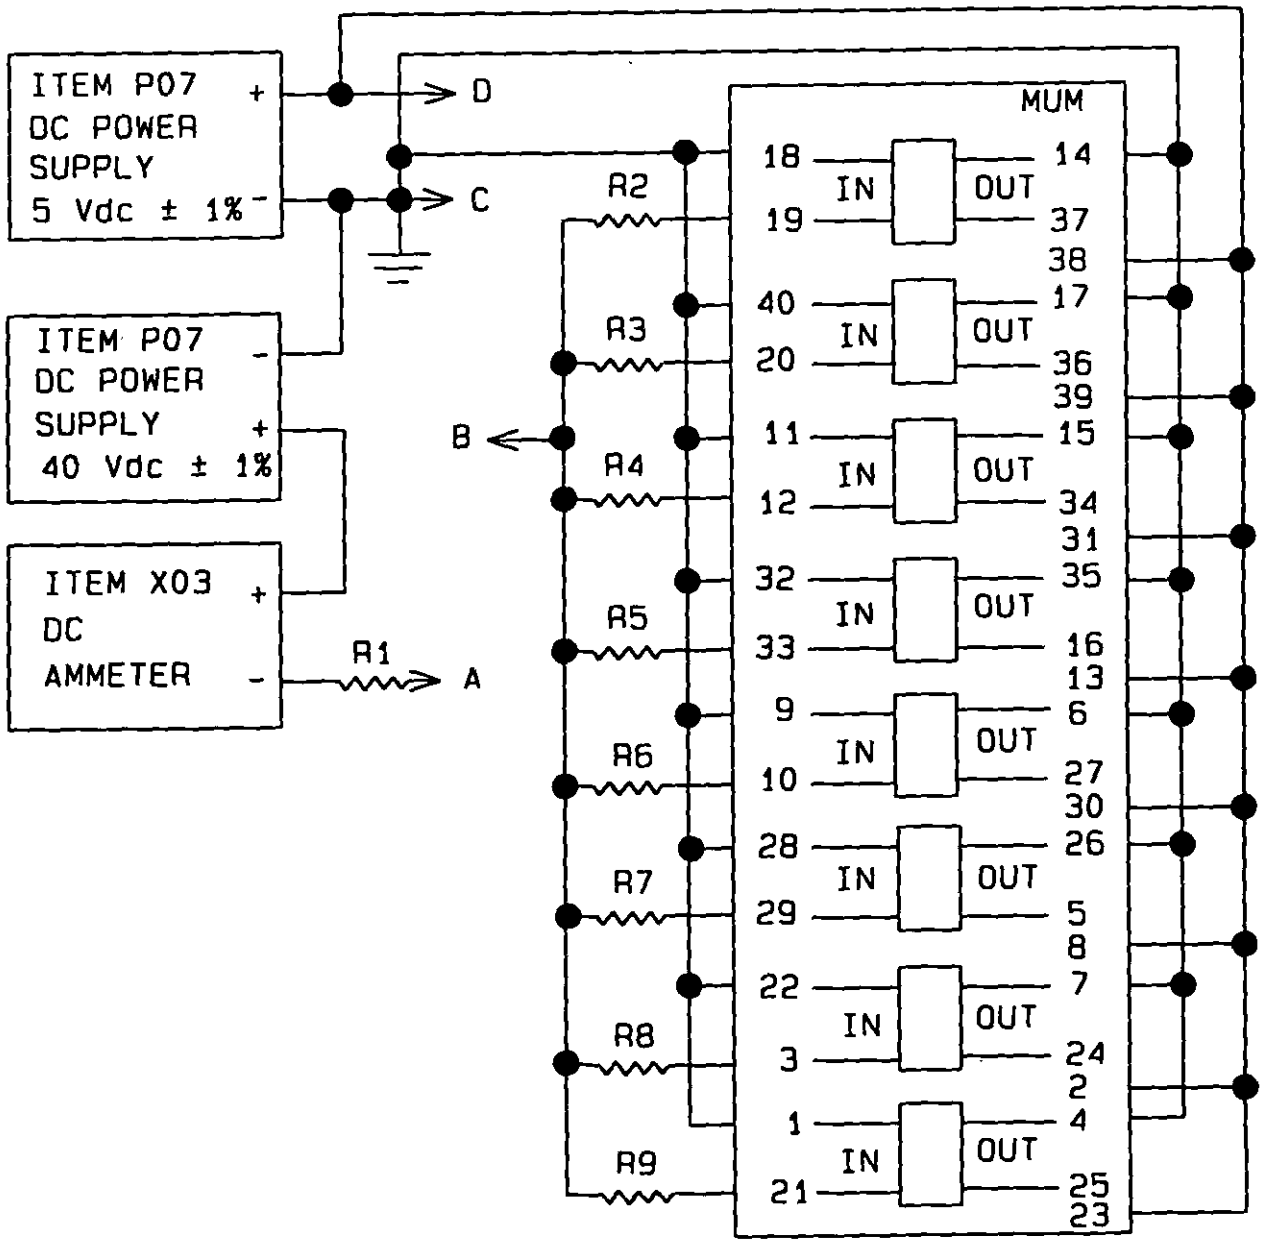

NOTES:

1. R1 = 20 kOhms ± 1 percent, 1/4 W.
2. R2-R9 = 1.87 kOhms ± 1 percent, 1/4 W.

FIGURE 10. Output leakage current and input threshold test circuit for table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:01Z
Check the source to verify that this is the current version before use.