INCH-POUND
MIL-DTL-32122 (OS)
30 June 2003

DETAIL SPECIFICATION

CARTRIDGE, CARTRIDGE ACTUATED
JL42, JL43, JL44

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Department and Agencies of the Department of Defense.

1.0 SCOPE

1.1 Scope. This specification covers the requirements for the manufacture and acceptance of the JL42, JL43 and JL44, Aircraft Fire Extinguisher Cartridge referred to herein as "cartridge".

1.2 Application. These cartridges are used to rupture the fire extinguisher tank's frangible disk and the pressurized inert extinguishing agent rapidly discharges into the area surrounding the aircraft engine.

2.0 APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents specified in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplements thereto, cited in the solicitation (See 6.2).

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-202	Test Method Standard Electronic and Electrical Components Parts
MIL-STD-1168	Ammunition Lot Numbering and Ammunition Data Card

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Engineering Documentation Branch (Code 4230), Indian Head, MD 20640-5035, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by sending a letter.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.
AMSC N/A FSC 1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-DTL-23659 Initiators, Electric, General Design Specification For

(Unless otherwise indicated, copies of Federal and Military specifications and standards are available from: Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation (see 6.2).

DRAWINGS

NAVAL AIR SYSTEMS COMMAND (CAGE Code 30003)

838AS185 Test Fixture, Cartridge Aircraft Fire Extinguisher

3205AS277-1 Cartridge, Cartridge Actuated JL42

3025AS277-2 Cartridge, Cartridge Actuated JL43

3025AS277-3 Cartridge, Cartridge Actuated JL44

(Application for copies should be addressed to the Commanding Officer, Naval Inventory Control Point, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.3 Non-Government publications and drawings. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents, which are DOD adopted, are those listed in the issue of the DODISS cited in solicitation. Unless otherwise specified, the issues of documents not listed in DODISS are the issues of the documents cited in the solicitation (see 6.2).

Pacific Scientific Energetic Materials Co.

2-103020-1, -2 and -3 Aircraft, Fire Extinguisher Cartridge

(Application for copies of Pacific Scientific Energetic Materials Co. drawings should be sent to Pacific Scientific Energetic Materials Co. 7073 W. Willis Drive, Chandler, AZ 85226)

`

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 748 Standard Practices for Thermal Neutron Radiography of Materials

ASTM E 1742 Standard Practice for Radiographic Inspection

(Application for copies of ASTMs should be sent to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE AS8660 Silicone Compound NATO Code Number S-736

(Application for copies of SAE – Aerospace Standards should be addressed to SAE, 400 Commonwealth Drive, Warrendale, PA 15096.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3.0 REQUIREMENTS

3.1 First article. When specified by the procuring activity (see 6.3), a sample sufficient to perform all required tests shall be subjected to the first article inspection (see 4.3). The sample shall be manufactured using the same methods and procedures proposed for the production lot and is for the purpose of determining that the contractor, prior to starting production, is capable of producing items which comply with the technical requirements of the contract. A first article inspection shall be required if;

a. Two or more years have passed since the cartridges were manufactured,
b. There has been a major turnover of personnel,
c. There have been major changes to the production facility or,
d. There has been a transfer of production to a new facility or site.

3.2 Conformance to documents. The Fire Extinguisher cartridges' DODICs: JL42, JL43 and JL43, covered by this specification shall be manufactured in accordance with drawing 3205AS277.

3.3 Design and construction. The aircraft fire extinguisher cartridge design and construction shall be identical to that subjected to qualification testing and approved for service use by the Navy. Any design changes affecting the interchangeability or performance of these items shall be subject to approval by the cognizant governmental design activity.

3.3.1 Configuration control. Only the cartridges procured from the vendor(s) listed on drawing 3205AS277 are approved for use by the Navy. The applicable DODIC and part numbers are shown in Table I. A substitute cartridge shall not be used or procured without prior approval and testing by the Indian Head Division, Naval Surface Warfare Center, and the Naval Air Systems Command Headquarters.

TABLE I. Configuration identification

DODIC	NAVAIR P/N
JL42	3205AS277-1
JL43	3025AS277-2
JL44	3025AS277-3

3.4 Cartridge inspection. The cartridges manufactured under contract shall be inspected and screened for defects as outlined in 3.4.1 through 3.4.7; failure of any cartridge to meet the requirements shall result in rejection of the cartridge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

3.4.1 Visual inspection. Each cartridge shall be rejected which has illegible, missing or inaccurate identification markings, damage or insufficient surface coatings, burrs, sharp edges, corrosion, dents, excessive pits or bubbles that may form a conductive path across the epoxy insulation surface, or other defects that might prevent proper installation or performance, when examined in accordance with 4.4.1.

3.4.2 Radiographic examination. Each cartridge pyrotechnics shall be properly oriented and without voids or discontinuities. All other parts shall be properly placed in accordance with manufacturers' drawings and in accordance with criteria listed below when inspected in accordance with 4.4.2.

Radiographic Acceptance criteria (X-RAY & N-RAY**)**

1. Verify presence and proper assembly of all parts.
2. Verify explosive charges are free of voids, cracks, and foreign material.
3. No potting compound allowed on spark gap side of gasket seal. (N-ray only)
4. Gasket seal seated properly against body at spark gap. (N-ray only)
5. 0.085 inch max voids allowed ½" from spark gap gasket seal. (N-ray only)
6. 0.160 inch max void allowed in remainder of potting. (N-ray only)

3.4.3 Insulation resistance. Each cartridge's insulation resistance shall be 2 megaohms minimum. The application of insulation resistance voltage shall not dud, adversely affect or cause the cartridge to fire when tested in accordance with 4.4.3.

3.4.4 Dielectric strength. Each cartridge's leakage current shall not exceed 0.1 milliampere (100 microamperes). The applied current shall not dud, adversely affect or cause the cartridge to fire, arc-over, flash-over, or breakdown as a result of the applied potential when tested in accordance with 4.4.4.

3.4.5 Bridge circuit resistance. All cartridge's bridge circuit resistance shall be 1.0 ± 01 ohms. The measurement of resistance shall not dud, adversely affect or cause the cartridge to fire when tested in accordance with 4.4.5.

3.4.6 Leakage. Each cartridge's leak rate shall not exceed 1.0 $x10^{-6}$ STD cc/sec of air when tested in accordance with 4.4.6.

3.4.7 Electrostatic discharge. Each cartridge shall be tested in accordance with 4.4.7 and shall not fire or dud.

3.4.8 Power - current. The cartridge shall not fire, be degraded or damage during the No-Fire current application test, See 4.6.

3.5 Ballistic requirements. The cartridges subjected for ballistic testing shall meet the requirements listed below when subjected to the test prescribed in 4.7.

3.5.1 Ignition time. The Maximum ignition time shall be 20 milliseconds, 4.6.2.2.

3.5.2 Indent depth. The minimum indent depth shall be 0.023 inches, See 4.6.2.3.

3.5.3 Misfires. There shall be no misfires, See 4.6.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

4.0 VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.2 First article inspection. Before entering into quantity production, an acceptable first article sample of 24 cartridges shall be prepared using the same procedures and methods proposed for the production lot. Twenty of these cartridges shall be expended in the tests listed in Table II and four shall be retained for investigative purposes. A first article sample acceptable for functional and environmental testing shall be defined as a sample, which has met the requirements of paragraph 3.2 through 3.4 of this specification. The contractor shall deliver the cartridges to the activity for tests designated by the contracting agency. Failure of one or more cartridges to pass the tests shall result in the rejection of the first article. Quantity production prior to notification by the contracting agency of pre-production sample acceptability shall be at the contractor's risk. The pre-production cartridges will not be applied as part of the quantity specified for delivery by the contract.

4.3 Conformance inspection. Twenty-One (21) samples shall be selected from the production lot. They shall be subjected to the nondestructive tests of 4.4 and ballistically tested in accordance with 3.5. The sample of cartridges shall be divided into three equal groups and tested at each of the three temperatures listed in 4.4. An additional four (4) cartridges shall be provided with each test sample for investigative purposes. Sample cartridges and cartridges made available for investigative purpose shall not be applied as part of the quantity specified for delivery by the contract or order. The production lot size shall be 151 minimum and 500 maximum. The contracting officer shall approve exceptions to this lot and sample size.

4.4 Nondestructive tests.

4.4.1 Visual inspections. The external condition and appearance of the cartridges shall be determined by comparison to drawings 3205AS277-1, 3025AS277-2 and 3025AS277-3 as required. All cartridge assemblies shall be visually examined and compared to the appropriate drawing for proper assembly, identification, color and interface control points. Those with illegible or inadequate descriptive markings or serial numbers, dents, deep scratches, or any other defects, which may prevent proper installation or functioning, shall be rejected. Any visual defects found during nondestructive inspection and destructive tests will result in 100 percent screening of the production lot at the contractor's expense. Each cartridge shall meet the requirements of 3.4.1.

4.4.2 Radiographic examination. All assembled cartridges shall be radiographically examined via both X-ray and N-ray. X-ray radiographic examination shall be conducted in accordance with ASTM E 1742; N-ray examination shall be in accordance with ASTM E 748. The cartridges shall be positioned for the most revealing exposure with the long axis perpendicular to the rays of the radiographic machine. All cartridges shall be identified with serial numbers prior to examination beginning with 001 for each production lot. The cartridges shall be arranged on boards or trays in consecutive order, with any missing serial numbers identified on the radiographic plate. Each radiograph shall carry a permanent identification of the items displayed thereon in a 4x6-inch region maximum. The radiographic identification shall include the drawing number, the complete lot number in accordance with MIL-STD-1168, the contract number, and the span of serial numbers displayed. Radiographs of the entire production lot shall accompany the ballistic sample to the activity conducting the lot acceptance tests. Any observable imperfections as

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

outlined in 3.4.2 shall be cause for rejection of the cartridge. Defective cartridges found during radiographic review are to be marked on the radiographic plate and removed from the production lot. Settings on the radiographic equipment shall be noted on the radiographic review sheets.

4.4.3 Insulation resistance. The insulation resistance examination shall be conducted in accordance with MIL-STD-202, method 302-test condition B. The 500 VDC potential shall be applied for a minimum of two minutes between the shorted contact pins and the body assembly. Each cartridge shall meet the requirements of 3.4.3.

TABLE II. First article inspection matrix

TEST	GROUP	A	B	C	D	E	F	TOTAL
	QUANTITY	4	4	4	4	4	4	24
	Para #.							
VISUAL EXAMINATION	3.4.1	X	X	X	X	X		20
X-RAY INSPECTION	3.4.2	X	X	X	X	X		20
BRIDGEWIRE RESISTANCE	3.4.5	X	X	X	X	X		20
DIELECTRIC STRENGTH	3.4.4	X	X	X	X	X		20
BRIDGEWIRE RESISTANCE	3.4.5	X	X	X	X	X		20
INSULATION RESISTANCE	3.4.3	X	X	X	X	X		20
BRIDGEWIRE RESISTANCE	3.4.5	X	X	X	X	X		20
LEAKAGE	3.4.6	X	X	X	X	X		20
BRIDGEWIRE RESISTANCE	3.4.5	X	X	X	X	X		20
ESD 25KV	3.4.7	X	X	X	X	X		20
BRIDGEWIRE RESISTANCE	3.4.5	X	X	X	X	X		20
POWER CURRENT	3.4.8	X	X	X	X	X		20
BRIDGEWIRE RESISTANCE	3.4.5	X	X	X	X	X		20
SHOCK	4.5.3			X				4
VIBRATION	4.5.2		X					4
THSA	4.5.1	X						4
VISUAL INSPECTION	3.4.1	X	X	X				12
X-RAY INSPECTION	3.4.2	X	X	X				12
BRIDGEWIRE RESISTANCE	3.4.5	X	X	X				12
LEAKAGE	3.4.6	X	X	X				12
POWER CURRENT	3.4.8	X	X	X				12
BRIDGEWIRE RESISTANCE	3.4.5	X	X	X				12
PERFORMANCE TEST FIRING	3,5							
FIRE @-65°F DENT TEST					4			4
FIRE @70°F DENT TEST		4	4	4				12
FIRE @ 300°F DENT TEST						4		4
RETAINS FOR INVESTIGATION							4	4

4.4.4 Dielectric strength. The dielectric strength examination shall be conducted in accordance with MIL-STD-202, method 301 at 500 VAC. The potential shall be applied to each unit for a minimum of 60 seconds from the shorted bridgewire circuit to cartridge case. Each cartridge's measured and recorded dielectric strength value at 60 seconds shall comply with 3.4.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

4.4.5 Bridge circuit resistance. The resistance of each bridge circuit shall be measured with accuracy of one percent using a test which subjects the bridge circuit to a current of less than 20 milliampere. The test shall be conducted in accordance with MIL-STD-202, method 303 except that the measurements shall be made at 70°F. Each cartridge shall comply with 3.4.5.

4.4.6 Leakage test. Each cartridge shall be leak tested to determine conformance to 3.4.6. Production units shall be leak tested by flushing the loaded cartridge assembly with Helium at a pressure of 1+0.1/-0.0 atmospheres absolute. The cartridge assembly shall then be washed with dry Nitrogen and placed in a vacuum chamber and checked for leakage at one atmosphere differential. Certification of the test results shall be supplied and Government witnessing will be as specified in the contract or purchase order.

4.4.7 Electrostatic discharge. Each cartridge shall be subjected to an electrostatic discharge of 25,000 ± 500 VDC from a 500 ± 25 Picofarad capacitor through a 5,000 ± 250 ohm resistor connected between shorted bridgewire pins and case.

4.5 Environmental test.

4.5.1 Temperature-shock/humidity/altitude (TSHA). A TSHA test per MIL-DTL-23659, Temperature-Shock/Humidity/Altitude, shall be conducted with the following exceptions.

- **a.** Altitude pressure 80,000 versus 70, 000 feet
- **b.** 95% versus 50% relative humidity (RH) applied at 70 °F
- **c.** 300 °F versus 160 °F conditioning along with omission a RH
- **d.** Place units on screen tray or in wire baskets to allow air to circulate freely, exposing all surfaces of the units, except noted otherwise.

TABLE III: TSH&A CYCLING PROCEDURE

DAY	TIME	PROCEDURE
MONDAY	0800	Place items in chamber maintained +300 °F
	1200	Chamber to +70°F at 95% RH. Chamber shall reach conditions within one hour.
	1600	Remove items and immediately place in a chamber maintained at –65 °F at an altitude pressure of 80,000 feet (ft)
TUESDAY	0800	Remove items from chamber and place in chamber maintained at +70 °F and 95% RH.
	1200	Remove items from chamber and place in chamber maintained at –65 °F at an altitude pressure of 80,000 ft
	1600	Remove items from chamber and place in chamber maintained at +300 °F.
WEDNESDAY	0800	Reduce chamber pressure to 70 °F at 95% RH. Chamber shall reach conditions within one hour.
	1200	Raise chamber to +300 °F. Chamber shall reach conditions in one hour.
	1600	Remove items and place in chamber maintained at –65 °F at an altitude pressure of 80,000 ft.
THURSDAY		Repeat Tuesday schedule.
FRIDAY	0800	Reduce chamber pressure to +70 °F at 95% RH. Chamber shall reach conditions within one hour.
	1200	Raise chamber to 300 °F. Chamber shall reach conditions in one hour.
	1600	Remove items and place in chamber maintained at +70 °F at 95% RH. See Note (2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

Table notes:


1. Tests shall be performed in the sequence shown, for duration and conditions shown. Day and clock times are provided as a guide and are not mandatory.

2. Test schedule shall repeated for a total of four weeks (28 days) except that on the second and fourth weekends the soak time was from 1600 Friday until 0800 on Monday shall be at 300°F.

3. No interim withdrawals of items. All items submitted for test shall complete the entire 28-day test cycle.

4.5.1.1 Success criteria. There shall be no evidence of excessive corrosion, peeling, chipping or blistering, of the finish or exposure of base metal. The cartridges shall perform satisfactorily when subjected to subsequent testing per Table II.

4.5.2 Vibration. Cartridges without protective caps but with shunt plugs shall be vibrated in three (3) mutually perpendicular axes. One axis shall be the longitudinal axis of the cartridge. The vibration tests per Figure 1 shall be conducted at -65°F, +70°F and +300°F. Each cartridge shall be mounted by its threads to the vibration test fixture, figure 2.

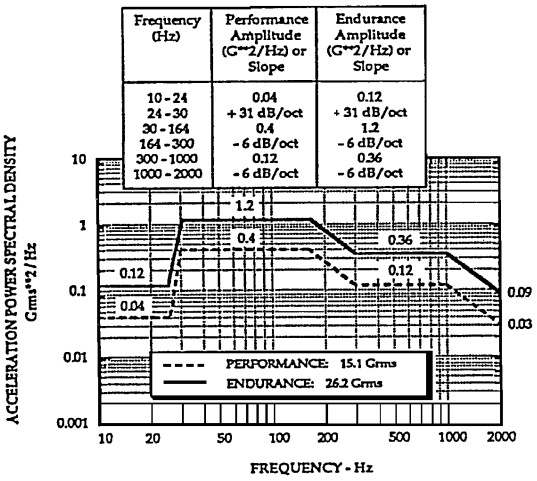

Random Performance	40 Min
Random Endurance	120 Min
(Test Time in Minutes per Axis)	

VIBRATION MATRIX

Random Endurance	40 Minutes per axis each temperature
Temperatures	-65°F, +70°F and +300°F

FIGURE 1. Vibration (non gunfire levels) – random test

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.


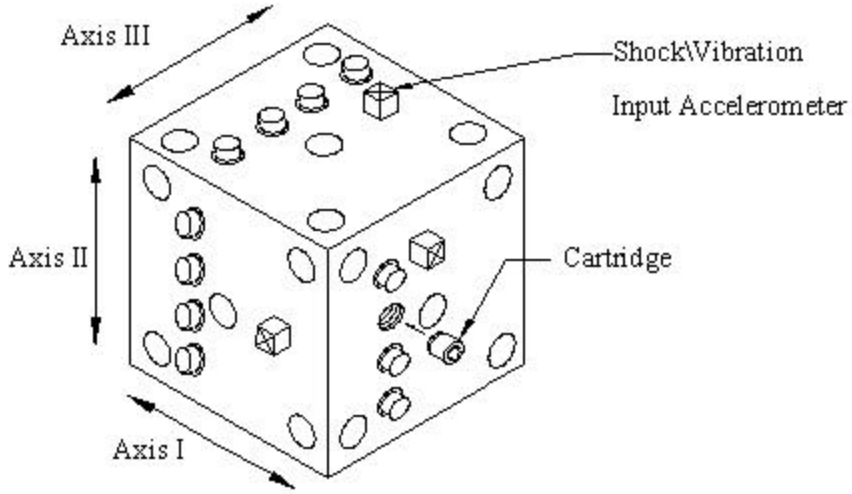


FIGURE 2. Shock/vibration test setup

4.5.2.1 Success criteria. The cartridges shall perform satisfactorily when subjected to subsequent testing per Table II.

4.5.3 Shock. The cartridges shall be subjected to the 20g-shock test profile outline in Figure 3 while mounted in the shock fixture, figure 2. Apply impact shocks, three in each direction per orthogonal axis depicted in Figure 2.

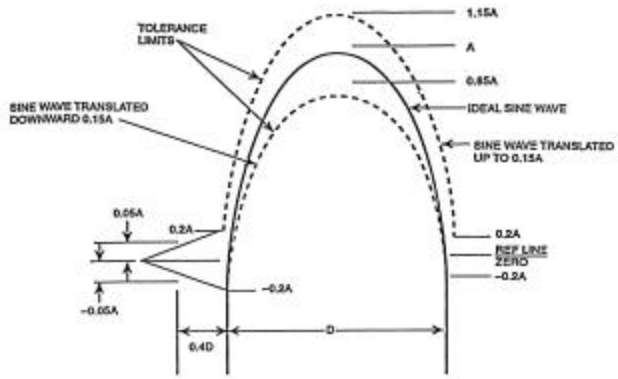

SERVICE SHOCK Basic Test	
Peak Value (G's)	Pulse Duration (ms)
20	11 ± 1

The oscillogram shall include a time about 3D long with a pulse located approximately in the center. The acceleration amplitude of the ideal half sine pulse is A and its duration is D. Any acceleration pulse, which can be contained between the broken line boundaries when measured with a 250Hz low pass filter, is acceptable.

FIGURE 3. Shock profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

4.5.3.1 Success criteria. The test items shall not fire; incur damage or degradation during the shock testing. The test items shall not have any loose, broken, or missing components. All test items shall be safe to handle after shock testing. The test items shall not be damaged to the extent that would prevent proper installation. The cartridges shall perform satisfactorily when subjected to subsequent testing per Table II.

4.6 No-Fire test. A direct current of not less than one ampere supplying a minimum of one watt shall be applied to the bridge circuit for a period of at lease 5 minutes. The test current shall be regulated throughout the period of application to within 2 percent. The cartridge shall be conditioned and tested at ambient temperature.

4.6.1 Success criteria. The cartridge shall not fire or incur degradation or damage during the no-fire current application test.

4.7 Ballistic test. The cartridges subjected to ballistic test shall meet the requirements of 3.5.

4.7.1 Ballistic test. Cartridges allocated for ballistic test firing at -65°F ±5°F and 300°F ±5°F shall be temperature conditioned for a period of time neither less than 4 hours not greater than 24 hours. Cartridges allocated for ballistic test firing at +70°F ±5°F shall be temperature conditioned for a period of time not less than 4 hours. If the cartridge is not fired within three minutes after removal from the temperature-conditioning box, it shall be reconditioned. Apply a minimum quantity of silicone compound SAE AS8660 to face of witness block in contact with output end of cartridge. The quick release pin shall be adjusted so that the spring applies a force of 1.6±02 pounds to ensure intimate contact of the block to the cartridge output end. The test specimen shall be fired in a manner as depicted on NAVAIR drawing no. 838AS185. A direct current ten (10) millisecond pulse shall be applied to the bridge circuit. The test current shall be a DC current pulse, regulated throughout the period of application, to within 2 percent of the desired value. If a rectified current is used, the ripple content shall not exceed 5 percent RMS of the test current. The test sample shall be fired at 3.1 amperes and 28 volts DC.

4.7.2 Acceptance Criteria. Acceptance criteria 4.7.1.2 through 4.7.1.6 shall be measured and recorded.

4.7.3 Ignition Time. The ignition time is defined as the time from the first application of firing current until the circuit opens as recorded on the oscillograph trace. The lot shall be acceptable with respect to ignition time if the ballistic sample meets the requirements of 3.5.1. The acceptable number of defects is zero and the rejection number is one or more.

4.7.4 Indent Depth. The lot shall be acceptable with respect to indent depth if the ballistic sample meets the requirements of 3.5.2. The acceptable number of defects is zero and the rejection number is one or more.

4.7.5 Misfire. A cartridge that does not fire under the conditions specified in 4.7.1 shall be considered defective, and the lot considered unacceptable, unless the misfire is clearly attributable to faulty test equipment or procedure.

4.7.6 Retest. There shall be no retest.

4.7.6.1 Test Failure. If a test failure is attributable to an assignable cause, excluding the test cartridges, the original test results shall be discarded and the test reconducted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

5.0 PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be specified in Section "D" of the contract or in the purchase order, (see 6.2). When actual packaging of material is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Departments or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6.0 NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended Use. These aircraft fire extinguisher cartridges are intended for in the emergency escape systems of the F-18 E/F. These cartridges were specifically designed for use in these military aircraft, and thus have no commercial application.

6.2 Acquisition Requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1, 2.2.2 and 2.3).

c. Whether a first article inspection is required and. if so, specify the test activity (See 3.1.)

d. List of data required for each First article and production lot.

e. Direction for shipping radiographic plates of the entire production lot along with ballistic sample to the activity conducting production lot acceptance tests.

f. Markings if other than as specified on drawing 3205AS277 and 520-174-0282.

g. Production lot sizes (quantity) and test facility (See 4.2).

h. That the safety precaution requirements of the "Contractors' Safety Manual for Ammunition, Explosives and Related Dangerous Material," DOD 4145.26M are applicable. NOTE: When this specification is used as a part of the description of work to be accomplished by a Government activity the safety precautions requirements of "Ammunition and Explosives," OP 5, are applicable.

6.3 First Article. When a first article inspection is required (see 3.1), the contracting officer should provide specific guidance to offeror(s) whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, standard production item from the contractor's current inventory and the number of items to be tested as specified in 4.3. The contracting officer should also include specific instructions in acquisition documents of the first articles. Invitation(s) for bid(s) should provide that the U.S. Government reserves the right to waive the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the U. S. Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior U.S. Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.3.1 Bar Coding. Bar Coding should be as specified in Section-D of the contract or purchase order (see 6.2), the outer container should be bar coded in accordance with MIL-HDBK-129. Additionally marking information specified on drawing 3205AS277 should be applied to the containers in accordance with the provisions of MIL-HDBK-129.

6.3.2 Explanation of terms. For the purpose of this specification, NAVSUPINST 4030.28B should be used to clarify terms.

6.4 Subject term (keyword) listing.

Aircraft fire extinguisher
F-18 E/F

Preparing activity
Navy - OS
(Project 1377-0190)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-32122 (OS)	2. DOCUMENT DATE (YYMMDD) 030630

3. DOCUMENT TITLE
CARTRIDGE, CARTRIDGE ACTUATED JL42, JL43, JL44

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed*.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
C. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) DSN (*If applicable*)	7. DATE SUBMITTED (*YYMMDD*)

8. PREPARING ACTIVITY

a. NAME Commander, Indian Head Division Naval Surface Warfare Center	b. TELEPHONE (*Include Area Code*) (1) Commercial 301-744-4700 (2) DSN 35 4-4700
c. ADDRESS (*Include Zip Code*) Standardization Team (Code 840M) 101 Strauss Avenue Indian Head, MD 20640-5035	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, VA 22060-6221 Telephone (703) 767-6888 DSN 427-6888

DD FORM 1426, FEB 1999 (EG) PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:48Z
Check the source to verify that this is the current version before use.