MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

TEST POINT, KEY CODE CZH

This specification is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the procurement of an electronic test point module.

1.2 Module description. The following electrical parameters reflect the 0° to 60°C end-of-life limits from table I.

Name	Test point
Family	Miscellaneous
Key code	CZH
Size	1A
Weight	35 grams maximum
Failure rate	0.016 failures/10^6 hours maximum
Environment	Class I as specified in MIL-STD-1389
Maximum applied voltage	±30 Vdc
Maximum power dissipation	100 mW
Maximum test point series resistance	0.1Ω

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Electronic Systems Command, ATTN: ELEX 5043, Department of the Navy, Washington, D.C. 20360, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

1.3 Module function. This module contains 40 individual nonisolated test points and is intended for use with spring hook type probe.

1.3.1 Module ground. If a ground reference is required, module pin 11 shall be used as the ground pin and test point J11 shall be used as 0 V reference.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

MIL-P-46112 - Plastic Sheet and Strip, Polyimide.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.

MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

PUBLICATIONS

MILITARY

NAVORD Drawing 2316885 - Eyelets.

NAVORD Drawing 2672600 - Module Profile.

(All NAVORD drawings shall be ordered from the Commanding Officer, Technical Documents Department, Naval Ordnance Station, Louisville, KY 40214.)

3. REQUIREMENTS

3.1 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.2 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

3.3 Failure rate requirements. All modules procured to this specification shall have a predicted failure rate no greater than 0.016 failures per million operating hours when predicted in accordance with MIL-STD-1389.

3.4 Performance requirements. The module shall conform to the electrical requirements specified in table I and shall operate within the environment of design class I as specified in MIL-STD-1389.

3.5 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.5.1 Key code. The module key code shall be CZH.

3.5.2 Size. The module size shall be 1A.

3.5.3 Weight. The module shall have a maximum weight of 35 grams.

3.5.4 Contact pins. The module shall have 40 contact pins positioned A1 through A40.

3.5.5 Fin. The fin extraction holes are not required (see figure 2).

3.5.6 Depth. The module shall have no additional depth requirements.

3.5.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.5.8 Marking. Marking shall be as specified on figure 3, MIL-STD-1389, and the module shall be marked with the military part number M28787/210-1.

3.5.9 Special mechanical configuration. Figures 2 and 3 specify the special mechanical configuration.

3.5.10 Insulator. The insulator shall be 0.007 ±0.0005 inch thick film in accordance with MIL-P-46112, type I, or equivalent.

3.5.11 Eyelet. Eyelets are noninsulated and are located on 0.130 inch centers (see figure 2). These eyelets are intended for use with spring hook type slip-on probe tips similar to Tektronix slip-on 013-0090-00 or Hewlett Packard 10229A, or equivalent.

3.6 Circuit pin configuration. The function diagram and pin assignments shall conform to figure 1.

3.7 Acceptance test. All production modules shall be tested in accordance with notes 1 and 2 of table I.

3.8 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits of table I (see 6.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

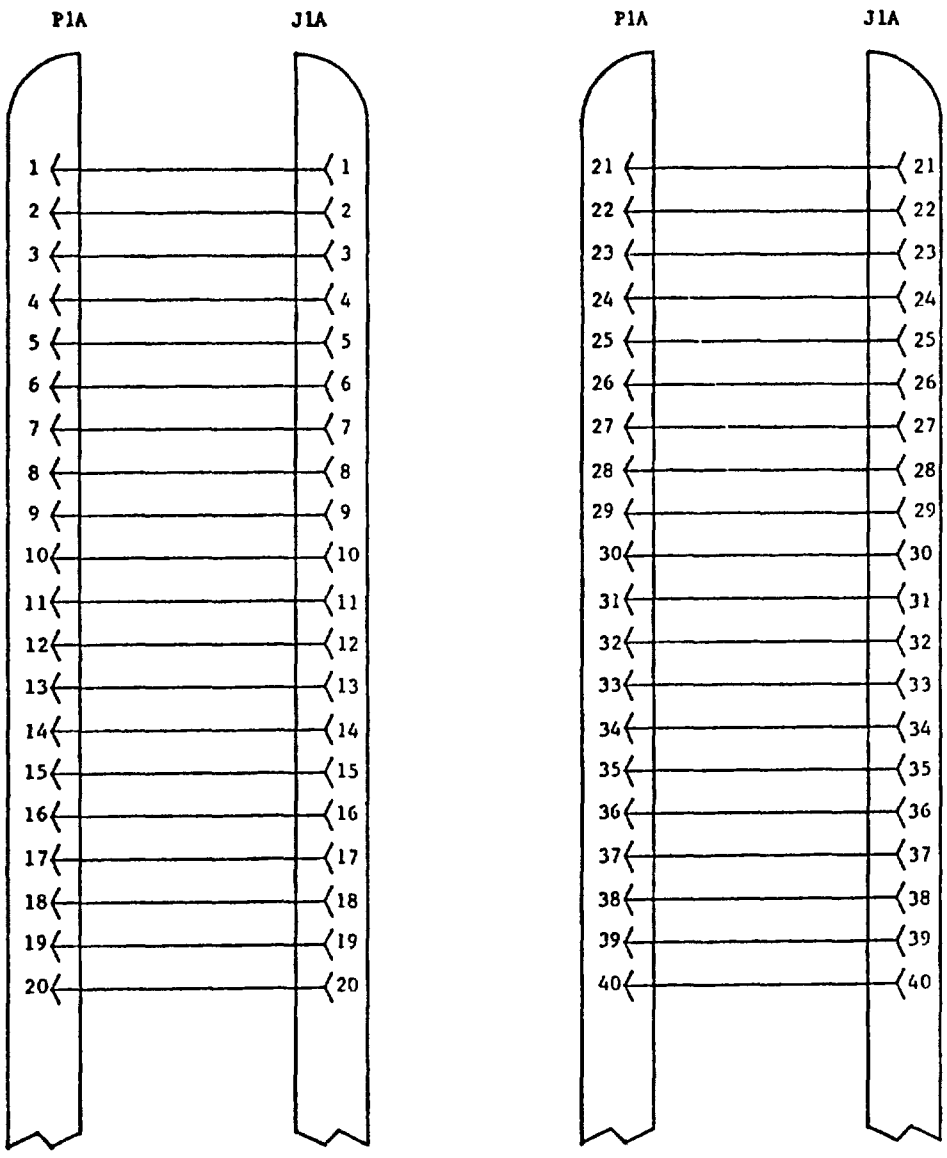


FIGURE 1. CZH module function diagram, test point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

Test condition	Parameter	Ref test table	Test type 1/-3/	Acceptance requirements 25° ± 5°C Ambient temperature				Operating temperature 0° to 60°C				Unit
				Initial		End-of-life		Initial		End-of-life		
				Min	Max	Min	Max	Min	Max	Min	Max	
A	Isolation, frame	II	S	10.0	∞	1.0	∞	10.0	∞	1.0	∞	MΩ
B1-B6	Isolation, module	III	X	10.0	∞	1.0	∞	10.0	∞	1.0	∞	MΩ
C1-C40	Continuity	IV	X	0.0	1.0	0.0	1.0	0.0	1.0	0.0	1.0	Ω
D1-D40	Continuity	V	Q	0.0	0.1	0.0	0.1	0.0	0.1	0.0	0.1	Ω
E1-E55	Capacitance, pin to pin	VI	Q	0.5	5.0	0.5	5.0	0.5	5.0	0.5	5.0	pF
F1-F39	Input capacitance	VII	Q	0.1	5.0	0.1	5.0	0.1	5.0	0.1	5.0	pF

1/ "X" parameters shall be 100 percent tested during module acceptance tests.
2/ "S" parameters shall be sample acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.
3/ "Q" parameters shall be tested during qualification testing only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

4.3 Test equipment. The following test equipment is necessary to conduct acceptance tests for this module. Test equipment shall be as specified in MIL-STD-1665 and that listed below:

Equipment	MIL-STD-1665 designator	No. required (maximum per test figure)
Megohm bridge	Item R06	1
Ohmmeter	Item R01	1
Resistance bridge	Item R02	1
Capacitance meter	Item C05	1

4.4 Test procedures. The module shall be tested as specified in table I.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Program Quality Assurance Activity (SEMP-QAA) and they conform to the requirements of MIL-M-28787.

4.4.2 Order of testing. Test conditions A through F may be performed in any order with the following exceptions. If test condition A or B are part of a sequence of tests, the order of testing shall be as follows. A, B where applicable, followed by the remaining tests in the sequence.

4.5 Qualification testing. Initial qualification tests and periodic-check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

4.5.1 Initial electrical. Test conditions A through F in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25° ±5°C ambient.

4.5.2 Operating temperature test. Not required.

4.5.2.1 Component temperature test. Not required.

4.5.3 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. Following the vibration tests, the electrical tests of table I which are marked with an "X" in the test type column shall be performed using the initial limits at 25°C ambient.

4.5.4 Life test. Not required.

4.5.5 Mechanical tests. Fin torque test and fin cantilever test are not required.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

6. NOTES

6.1 Definitions. Definitions are as specified in MIL-STD-1331.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements of table I, the module is considered to have completed its useful life (see 3.8).

6.3 Cross reference of classification. Part number M28787/210-1 supersedes part number M28787/210. The two parts are interchangeable.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N053)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

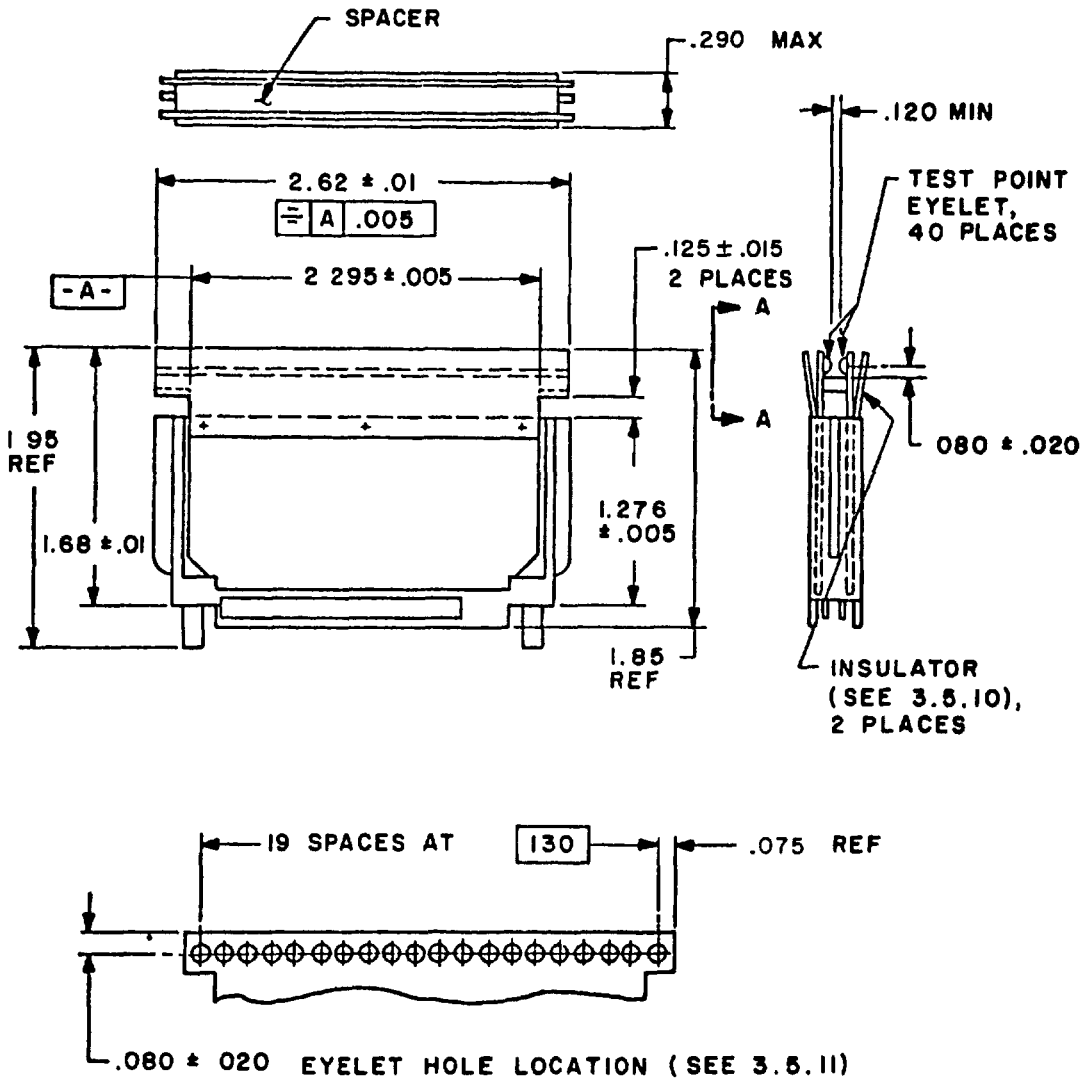

VIEW A-A (INSULATOR NOT SHOWN)

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.080	2.03	1.68	42.7
.01	.3	.120	3.05	1.85	47.0
.015	.38	.125	3.18	1.95	49.5
.020	.51	.130	3.30	2.295	58.29
.030	.76	.290	7.37	2.62	66.5
.075	1.90	1.276	32.41		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Module CZH test point configuration requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

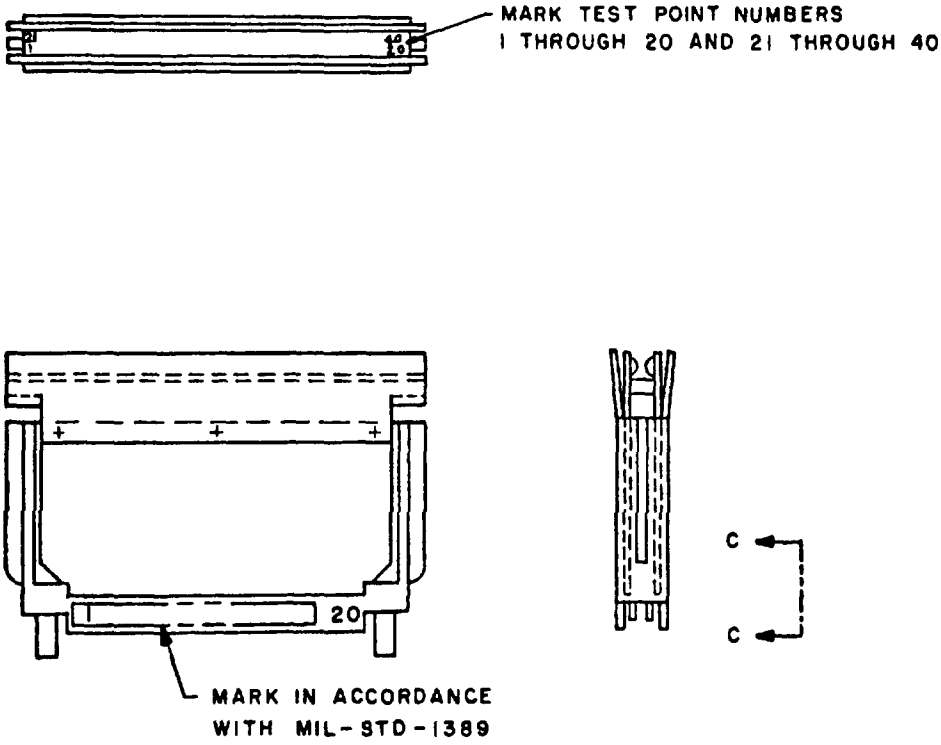



FIGURE 3. Module CZH test point marking requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE II. Isolation (frame) test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
A	Isolation, frame	C	Frame	10.0	∞	MΩ	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

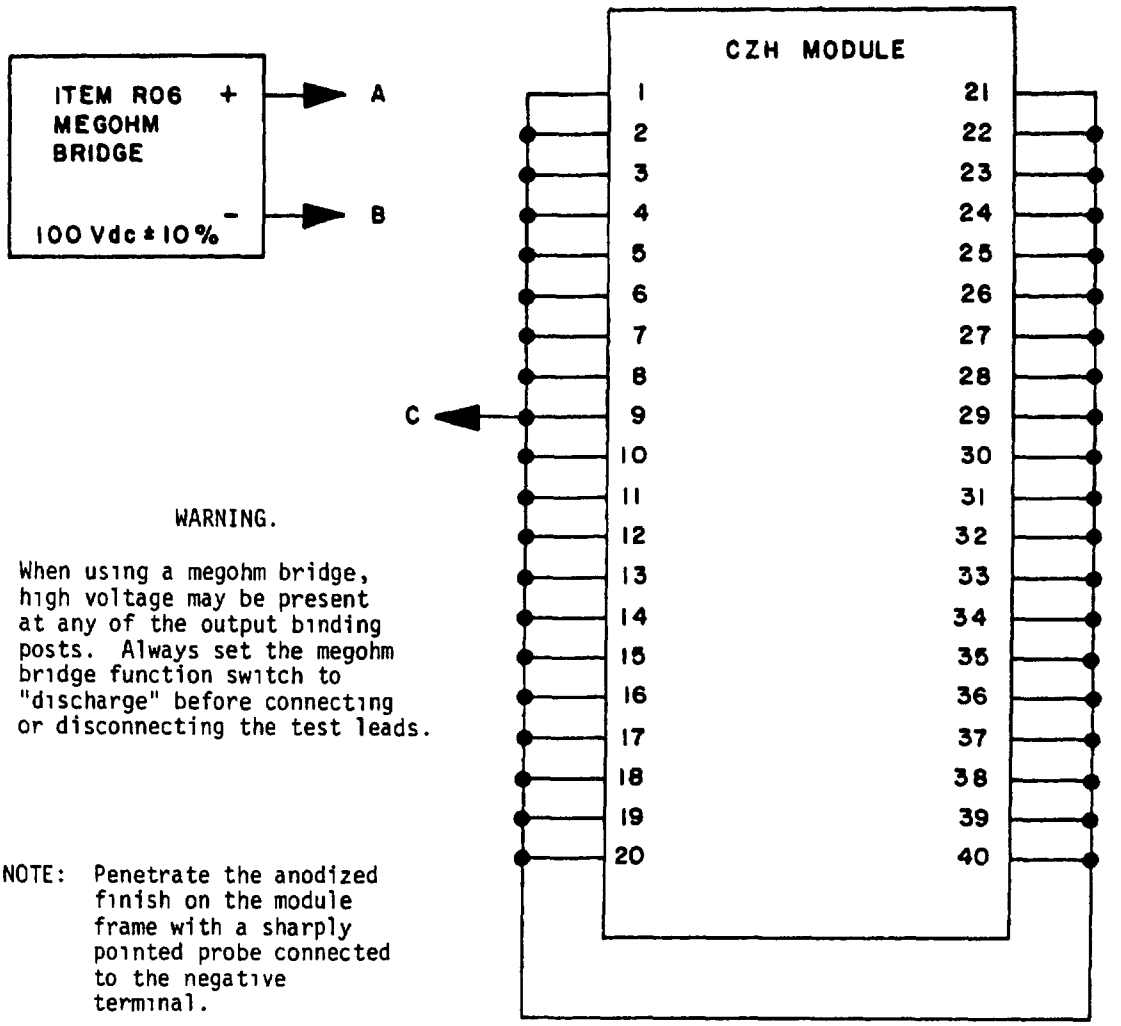

WARNING.

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

NOTE: Penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal.


FIGURE 4 Isolation (frame) test circuit for table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE III. Isolation (module) test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
B1	Isolation, module	1,3,5,7,9,11, 13,15,17,19, 21,23,25,27, 29,31,33,35, 37,39	2,4,6,8,10, 12,14,16,18, 20,22,24,26, 28,30,32,34, 36,38,40	10.0	∞	MΩ	5
B2		3,5,8,10,13, 15,18,20,23, 28,30,33,35, 38,40	1,2,4,6,7,9, 11,12,14,16, 17,19,21,22, 24,25,26,27, 29,31,32,34, 36,37,39				
B3		1,2,3,6,7,8, 11,12,13,16, 17,18,21,22, 23,26,27,28, 31,32,33,36, 37,38	4,5,9,10,14, 15,19,20,24, 25,29,30,34, 35,39,40				
B4		1,2,3,4,5,11, 12,13,14,15, 21,22,23,24, 25,31,32,33, 34,35	6,7,8,9,10, 16,17,18,19, 20,26,27,28, 29,30,36,37, 38,39,40				
B5		1,2,3,4,5,6, 7,8,9,10,21, 22,23,24,25, 26,27,28,29, 30	11,12,13,14, 15,16,17,18, 19,20,31,32, 33,34,35,36, 37,38,39,40				
B6	Isolation, module	1,2,3,4,5,6, 7,8,9,10,11, 12,13,14,15, 16,17,18,19, 20	21,22,23,24, 25,26,27,28, 29,30,31,32, 33,34,35,36, 37,38,39,40	10.0	∞	MΩ	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

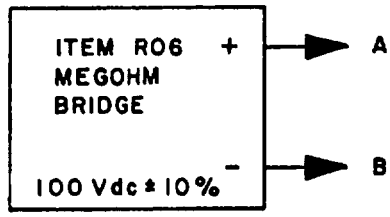

WARNING:

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

CZH MODULE

1	21
2	22
3	23
4	24
5	25
6	26
7	27
8	28
9	29
10	30
11	31
12	32
13	33
14	34
15	35
16	36
17	37
18	38
19	39
20	40

FIGURE 5. Isolation (module) test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE IV. Continuity test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to test point	Min	Max		
C1	Continuity	1	J1A1	0.0	1.0	Ω	6
C2	↓	2	J1A2	↓	↓	↓	↓
C3		3	J1A3				
C4		4	J1A4				
C5		5	J1A5				
C6		6	J1A6				
C7		7	J1A7				
C8		8	J1A8				
C9		9	J1A9				
C10		10	J1A10				
C11		11	J1A11				
C12		12	J1A12				
C13		13	J1A13				
C14		14	J1A14				
C15		15	J1A15				
C16		16	J1A16				
C17	↓	17	J1A17	↓	↓	↓	↓
C18	Continuity	18	J1A18	0.0	1.0	Ω	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE IV. Continuity test - Continued.


Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to test point	Min	Max		
C19	Continuity	19	J1A19	0.0	1.0	Ω	6
C20		20	J1A20				
C21		21	J1A21				
C22		22	J1A22				
C23		23	J1A23				
C24		24	J1A24				
C25		25	J1A25				
C26		26	J1A26				
C27		27	J1A27				
C28		28	J1A28				
C29		29	J1A29				
C30		30	J1A30				
C31		31	J1A31				
C32		32	J1A32				
C33		33	J1A33				
C34		34	J1A34				
C35		35	J1A35				
C36	Continuity	36	J1A36	0.0	1.0	Ω	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE IV. Continuity test - Continued.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to test point	Min	Max		
C37	Continuity	37	J1A37	0.0	1.0	Ω	6
C38	↓	38	J1A38	↓	↓	↓	↓
C39		39	J1A39				
C40	Continuity	40	J1A40	0.0	1.0	Ω	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

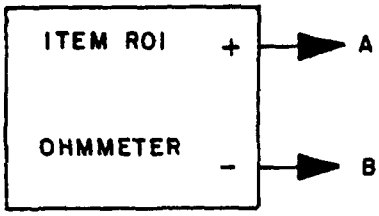

CZH MODULE	
1	J1
2	J2
3	J3
4	J4
5	J5
6	J6
7	J7
8	J8
9	J9
10	J10
11	J11
12	J12
13	J13
14	J14
15	J15
16	J16
17	J17
18	J18
19	J19
20	J20
21	J21
22	J22
23	J23
24	J24
25	J25
26	J26
27	J27
28	J28
29	J29
30	J30
31	J31
32	J32
33	J33
34	J34
35	J35
36	J36
37	J37
38	J38
39	J39
40	J40

FIGURE 6. Continuity test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE V. Continuity test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to test point	Min	Max		
D1	Continuity	1	J1A1	0.0	0.1	Ω	7
D2	↓	2	J1A2	↓	↓	↓	↓
D3		3	J1A3				
D4		4	J1A4				
D5		5	J1A5				
D6		6	J1A6				
D7		7	J1A7				
D8		8	J1A8				
D9		9	J1A9				
D10		10	J1A10				
D11		11	J1A11				
D12		12	J1A12				
D13		13	J1A13				
D14		14	J1A14				
D15		15	J1A15				
D16		16	J1A16				
D17	↓	17	J1A17	↓	↓	↓	↓
D18	Continuity	18	J1A18	0.0	0.1	Ω	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE V. Continuity test - Continued.


Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to test point	Min	Max		
D19	Continuity	19	J1A19	0.0	0.1	Ω	7
D20		20	J1A20				
D21		21	J1A21				
D22		22	J1A22				
D23		23	J1A23				
D24		24	J1A24				
D25		25	J1A25				
D26		26	J1A26				
D27		27	J1A27				
D28		28	J1A28				
D29		29	J1A29				
D30		30	J1A30				
D31		31	J1A31				
D32		32	J1A32				
D33		33	J1A33				
D34		34	J1A34				
D35		35	J1A35				
D36	Continuity	36	J1A36	0.0	0.1	Ω	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE V. Continuity test - Continued.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to test point	Min	Max		
D37	Continuity	37	J1A37	0.0	0.1	Ω	7
D38	↓	38	J1A38	↓	↓	↓	↓
D39	↓	39	J1A39	↓	↓	↓	↓
D40	Continuity	40	J1A40	0.0	0.1	Ω	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

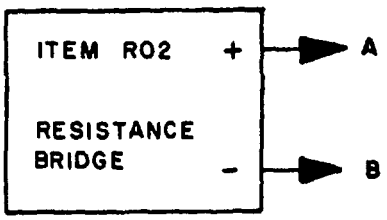

CZH MODULE	
1	J1
2	J2
3	J3
4	J4
5	J5
6	J6
7	J7
8	J8
9	J9
10	J10
11	J11
12	J12
13	J13
14	J14
15	J15
16	J16
17	J17
18	J18
19	J19
20	J20
21	J21
22	J22
23	J23
24	J24
25	J25
26	J26
27	J27
28	J28
29	J29
30	J30
31	J31
32	J32
33	J33
34	J34
35	J35
36	J36
37	J37
38	J38
39	J39
40	J40

FIGURE 7. Continuity test for table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE VI. Capacitance (pin-to-pin) test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
E1	Capacitance, pin to pin	1	2	0.5	5.0	pF	8
E2	↓	2	3	↓	↓	↓	↓
E3		3	4				
E4		4	5				
E5		5	6				
E6		6	7				
E7		7	8				
E8		8	9				
E9		9	10				
E10		12	13				
E11		13	14				
E12		14	15				
E13		15	16				
E14		16	17				
E15		17	18				
E16		18	19				
E17	↓	19	20	↓	↓	↓	↓
E18	Capacitance, pin to pin	21	22	0.5	5.0	pF	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE VI. Capacitance (pin-to-pin) test - Continued.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
E19	Capacitance, pin to pin	22	23	0.5	5.0	pF	8
E20		23	24				
E21		24	25				
E22		25	26				
E23		26	27				
E24		27	28				
E25		28	29				
E26		29	30				
E27		30	31				
E28		31	32				
E29		32	33				
E30		33	34				
E31		34	35				
E32		35	36				
E33		36	37				
E34		37	38				
E35		38	39				
E36	Capacitance, pin to pin	39	40	0.5	5.0	pF	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE VI. Capacitance (pin-to-pin) test - Continued.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
E37	Capacitance, pin to pin	1	21	0.5	5.0	pF	8
E38	↓	2	22	↓	↓	↓	↓
E39		3	23				
E40		4	24				
E41		5	25				
E42		6	26				
E43		7	27				
E44		8	28				
E45		9	29				
E46		10	30				
E47		12	32				
E48		13	33				
E49		14	34				
E50		15	35				
E51		16	36				
E52		17	37				
E53		18	38				
E54	↓	19	39	↓	↓	↓	↓
E55	Capacitance, pin to pin	20	40	0.5	5.0	pF	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE VII. Input capacitance test.


Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
F1	Input capacitance	1	11	0.1	5.0	pF	8
F2	↓	2	↓	↓	↓	↓	↓
F3		3					
F4		4					
F5		5					
F6		6					
F7		7					
F8		8					
F9		9					
F10		10					
F11		12					
F12		13					
F13		14					
F14		15					
F15		16					
F16		17					
F17		18					
F18		19					
F19	↓	20	↓	↓	↓	↓	↓
F20	Input capacitance	21	11	0.1	5.0	pF	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

TABLE VII. Input capacitance test - Continued.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
F21	Input capacitance	22	11	0.1	5.0	pF	8
F22		23					
F23		24					
F24		25					
F25		26					
F26		27					
F27		28					
F28		29					
F29		30					
F30		31					
F31		32					
F32		33					
F33		34					
F34		35					
F35		36					
F36		37					
F37		38					
F38		39					
F39	Input capacitance	40	11	0.1	5.0	pF	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

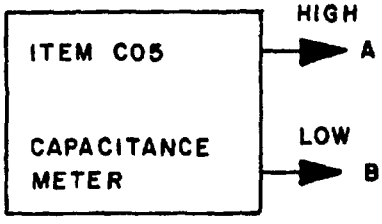

CZH MODULE	
1	J1
2	J2
3	J3
4	J4
5	J5
6	J6
7	J7
8	J8
9	J9
10	J10
11	J11
12	J12
13	J13
14	J14
15	J15
16	J16
17	J17
18	J18
19	J19
20	J20
21	J21
22	J22
23	J23
24	J24
25	J25
26	J26
27	J27
28	J28
29	J29
30	J30
31	J31
32	J32
33	J33
34	J34
35	J35
36	J36
37	J37
38	J38
39	J39
40	J40

FIGURE 8. Capacitance (pin-to-pin) and input capacitance test circuit for tables VI and VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-M-28787/210A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.