MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

TEST POINT, ISOLATED, MISCELLANEOUS, KEY CODE FZJ

This amendment forms a part of Military Specification MIL-M-28787/211A(EC), dated 12 October 1983, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

FIGURE 1: Delete and substitute new figure 1 as printed on page 2 of this amendment.

PAGE 6

At top of page: Delete "MIL-M-28787/221A(EC)" and substitute "MIL-M-28787/211A(EC)".

6.5, first sentence: Delete and substitute: "This module provides up to 20 test points."

6.5.1, add new 6.5.1.3 as follows:

"6.5.1.3 Modules built to MIL-M-28787/211(EC) including amendments 1 and 2 had pin 11 connected to the frame".

PAGE 10

TABLE II, Test condition B, A to pin column: Delete "All pins" and substitute "All pins except pin 11".

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N638)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

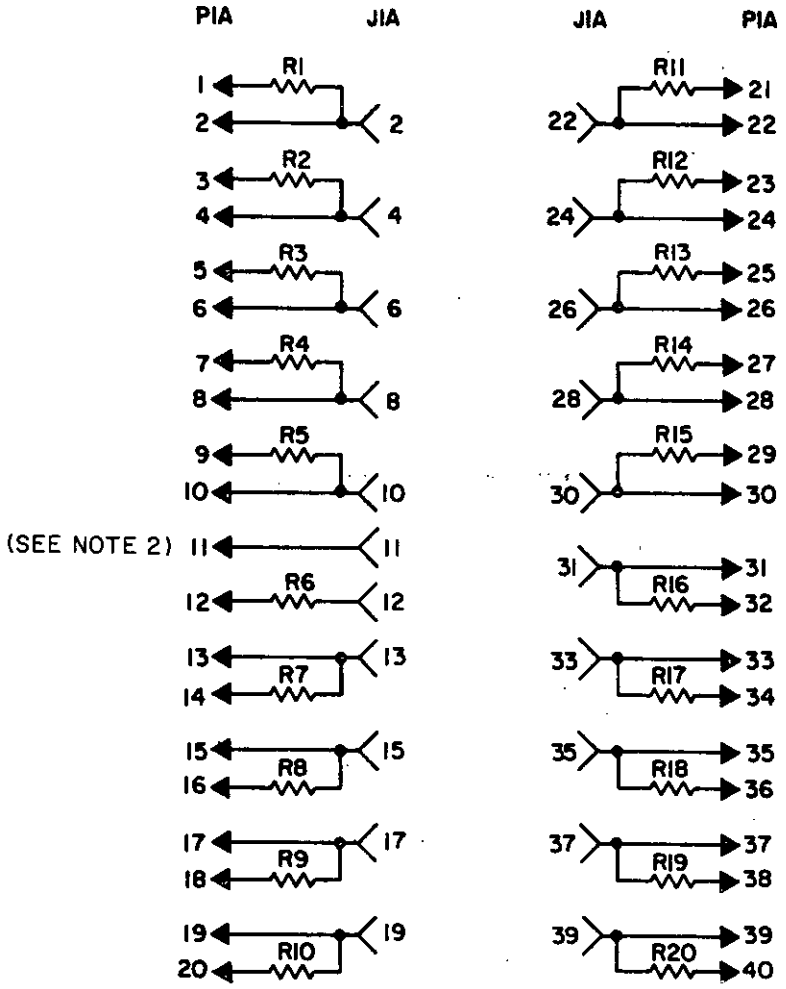

NOTES:
1. R1-R20 = 10 kΩ ±1%, 1/8 W.
2. For additional information on pin 11, see 6.5.1.3.

* FIGURE 1. FZJ module function diagram, isolated test point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.