INCH-POUND

MIL-M-28787/211A(SH)
AMENDMENT 2
23 March 1992

SUPERSEDING
AMENDMENT 1
28 January 1985

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

TEST POINT, ISOLATED, MISCELLANEOUS, KEY CODE FZJ

This amendment forms a part of Military Specification MIL-M-28787/211A(EC), dated 12 October 1983, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

* 3.5.10, first line: Delete "0.007 ± 0.0005" and substitute "0.006 ± 0.002"

PAGE 3

FIGURE 1: Delete and substitute new figure 1 as printed on page 3 of this amendment.

PAGE 5

* 4.5.3, fifth line: Delete "Following the life test, test condition C" and substitute "Following the life test, test conditions C and D"

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

MIL-M-28787/211A(SH)
AMENDMENT 2

PAGE 6

At top of page: Delete "MIL-M-28787/221A(EC)" and substitute "MIL-M-28787/211A(EC)".

Add new 6.5.1.3 as follows:

"6.5.1.3 Modules built to MIL-M-28787/211(EC) including amendments 1 and 2 had pin 11 connected to the frame".

PAGE 10

TABLE II, Test condition B, A to pin column. Delete "All pins" and substitute "All pins except pin 11"


NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - SH

(Project 5963-N799)

Agent: NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.

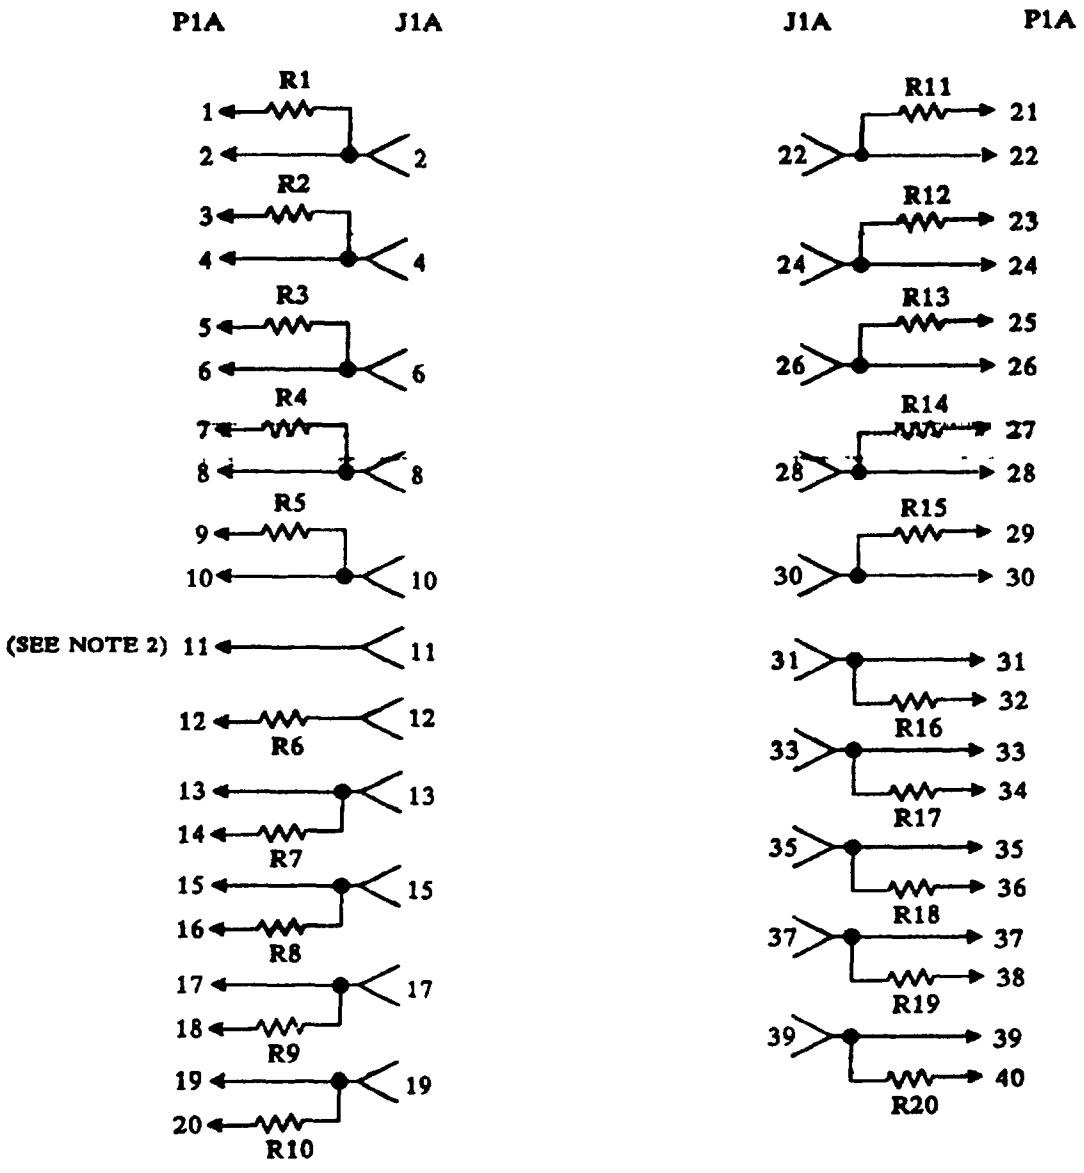

NOTES:
1. R1-R20 = 10kΩ ± 1%, 1/8W.
2. For additional information on pin 11, see 6.5.1.3.

FIGURE 1 EZJ module function diagram, isolation test point

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:41Z
Check the source to verify that this is the current version before use.