MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

INTEGRATOR, S/D, ANALOG, KEY CODE PEG

This amendment forms a part of Military Specification MIL-M-28787/228A(EC), dated 9 September 1982, and is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

* FIGURE 1: Delete and substitute new figure 1 as printed on page 3 of this amendment.

PAGE 11

TABLE I, Test condition W3, W4; delete all columnar data and substitute the following:

" |W3, W4|Power supply current|XXII| S |7.3|27.0|7.0|27.7|7.0|27.7|6.8|28.5|mA|
| | | | | | | | | | | | | | |"

PAGE 12

6.3, Maximum power dissipation, ±16.5 V dc: Delete "445 mW" and substitute "942 mW".

PAGE 13

6.4.1, second equation: Delete "G" and substitute "2262".

* 6.4.1, add new paragraph following the second equation:

"Modules which were built in accordance with MIL-M-28787/228A(EC) and Amendment 1 and all prior revisions have an optional gain pin. This optional gain pin was pin A25. Pin A25 must be connected to pin A38 to obtain a gain factor of 2262. Current design eliminates this gain option. Connect pin A25 to pin A38 for all applications to maintain compatibility."

PAGE 38

FIGURE 9, NOTE 20.f.: Delete "380 µs" and substitute "480 µs".

PAGES 42 and 43

FIGURE 11, NOTES 20.h., 22.c., 23.c., 24.c., and 25.c.: Delete "380 µs" and substitute "480 µs".

PAGES 45 AND 46

FIGURE 12, NOTES 21.h., 22.c., 23.c., and 24.c.: Delete "380 µs" and substitute "480 µs".

PAGES 49 AND 50

FIGURE 14, NOTES 20.h., 21.c., 22.c., and 23.c.: Delete "380 µs" and substitute "480 µs".

FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:48Z
Check the source to verify that this is the current version before use.

PAGES 52 AND 53

FIGURE 15, NOTES 20.g., 21.c., 22.c., and 23.c.: Delete "380 µs" and substitute "480 µs".

PAGES 55 AND 56


FIGURE 16, NOTES 22.h., 23.c., 24.c., and 25.c.: Delete "380 µs" and substitute "480 µs".

PAGE 69

TABLE XXII, Test conditions W3 and W4, Max column: Delete "12.7" (two places) and substitute "27.0" (two places).

NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:48Z
Check the source to verify that this is the current version before use.

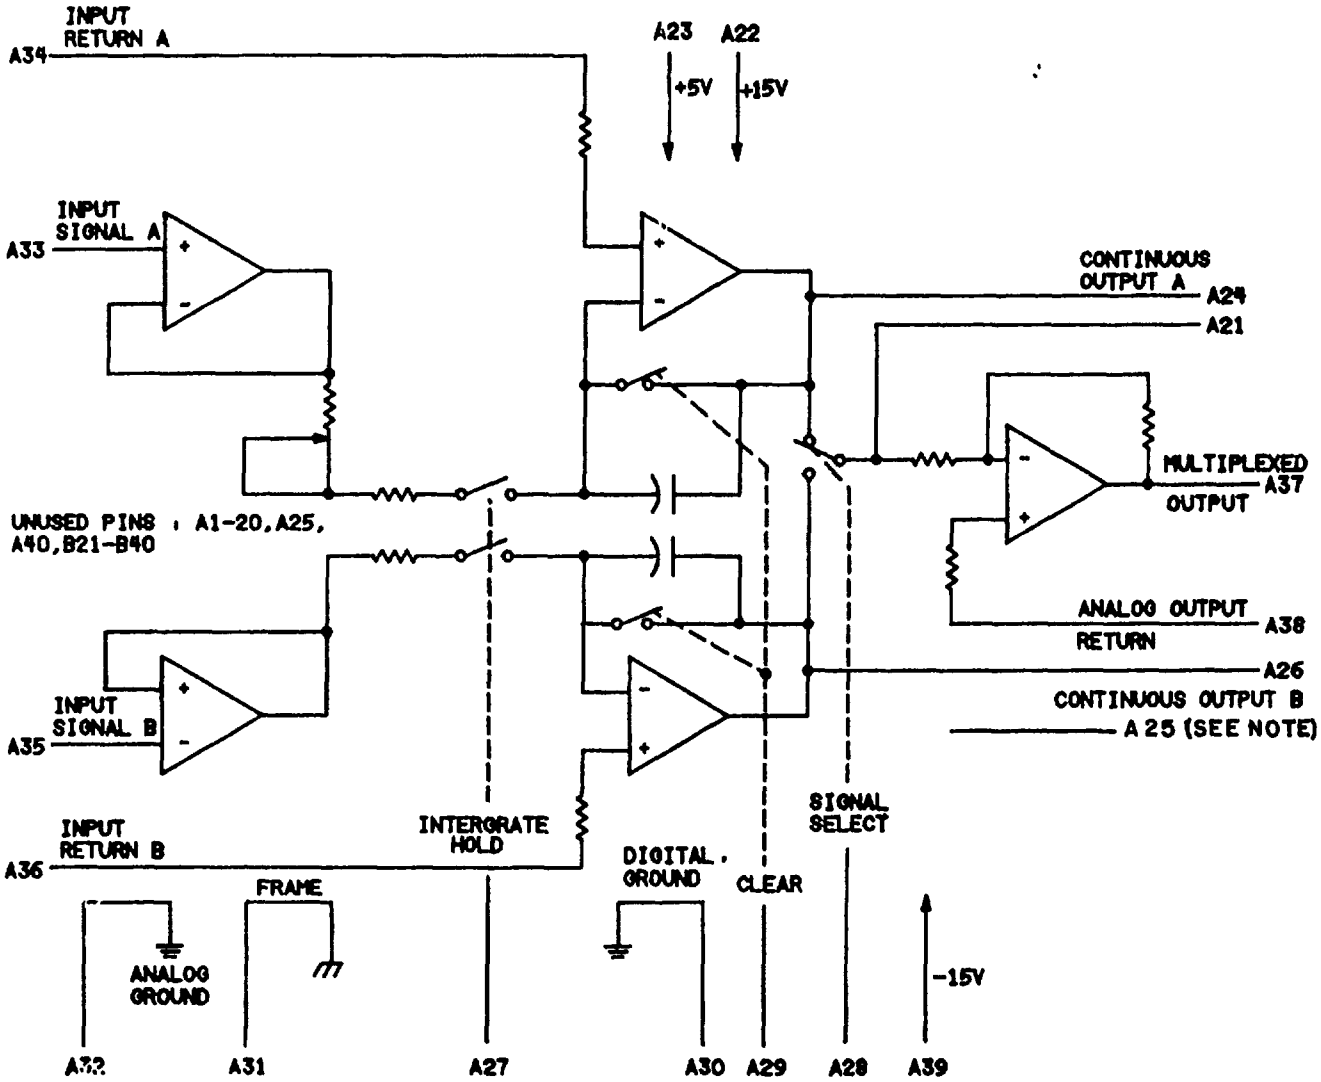

NOTE: Pin A25 must be connected to pin A38 external to the module for all applications (see 6.4.1).

FIGURE 1. PEG module function diagram, S/D integrator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:48Z
Check the source to verify that this is the current version before use.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N671)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:48Z
Check the source to verify that this is the current version before use.