INCH-POUND

MIL-M-28787/233B(SH)
AMENDMENT 1
19 November 1990

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

AMPLIFIER, CLIPPER, ANALOG, KEY CODE FBE

This amendment forms a part of Military Specification MIL-M-28787/233B(EC), dated 11 June 1979, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 5

4.4.2, third line: Delete "A, B, C, D" and substitute "D, A, B, C".

4.5.1, fifth line: Delete "E through L, M2, M3, N and R" and substitute "E through F2 and G through N".

4.5.3, third line: Delete "E through L, M2, M3, N, and R" and substitute "E through F2 and G through N".

4.5.3, sixth line: Delete "D through R" and substitute "E through F2 and G through N".

PAGE 8

TABLE I: Delete and substitute new table I as printed on page 3 of this amendment.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

PAGE 43

FIGURE 20: Delete and substitute new figure 20 as printed on page 4 of this amendment.

Preparing activity:
Navy - SH

(Project 5963-N802)

Agent: NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

Test cond.	Parameter	Ref test table	Test type 1/-3/	Acceptance requirements 25 ± 5°C ambient temperature				Operating temperature 0 to 60°C				Unit
				Initial		End-of-life		Initial		End-of-life		
				Min	Max	Min	Max	Min	Max	Min	Max	
A	V_S stress output signal	II	Q	900	1100	900	1100	900	1100	900	1100	Hz
B	Output short circuit current	III	Q	20	100	20	100	20	100	20	100	mA
C	Recovery time	IV	S	0	100	0	100	0	100	0	100	ms
D1	Isolation, frame	V	S	10	∞	1.0	∞	10	∞	1.0	∞	MΩ
D2-D11	Isolation, pin to pin	V	X	10	∞	1.0	∞	10	∞	1.0	∞	MΩ
E1, E3	Output signal, voltage, low level	VI	X	0.0	0.5	0.0	0.5	0.0	0.5	0.0	0.5	V
E2, E4	Output signal, voltage, high level	VI	X	2.5	5.0	2.5	5.0	2.5	5.0	2.5	5.0	V
E5	Output signal, 10 kHz	VI	X	96	104	96	104	96	104	96	104	µs
E6	Output signal, small signal bandwidth check	VI	S	1.8	2.2	1.8	2.2	1.8	2.2	1.8	2.2	µs
F1	Transition time (t_{TLH})	VII	X	18	70	18	70	18	70	18	70	ns
F2	Transition time (t_{THL})	VII	X	5	70	5	70	5	70	5	70	ns
F3	Transition time (t_{TLH})	VII	Q	30	100	30	100	30	100	30	100	ns
G1-G2	Propagation delay time (t_{PLH} and t_{PHL})	VII	X	100	300	100	300	100	300	100	300	ns
H1-H2	Power supply current, ± 15V	VIII	X	10	50	10	50	10	50	10	50	mA
H3	Power supply current, 5V	VIII	X	2	20	2	20	2	20	2	20	mA
J	Input impedance check	IX	S	0.50	1.01	0.50	1.01	0.50	1.01	0.50	1.01	V rms

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

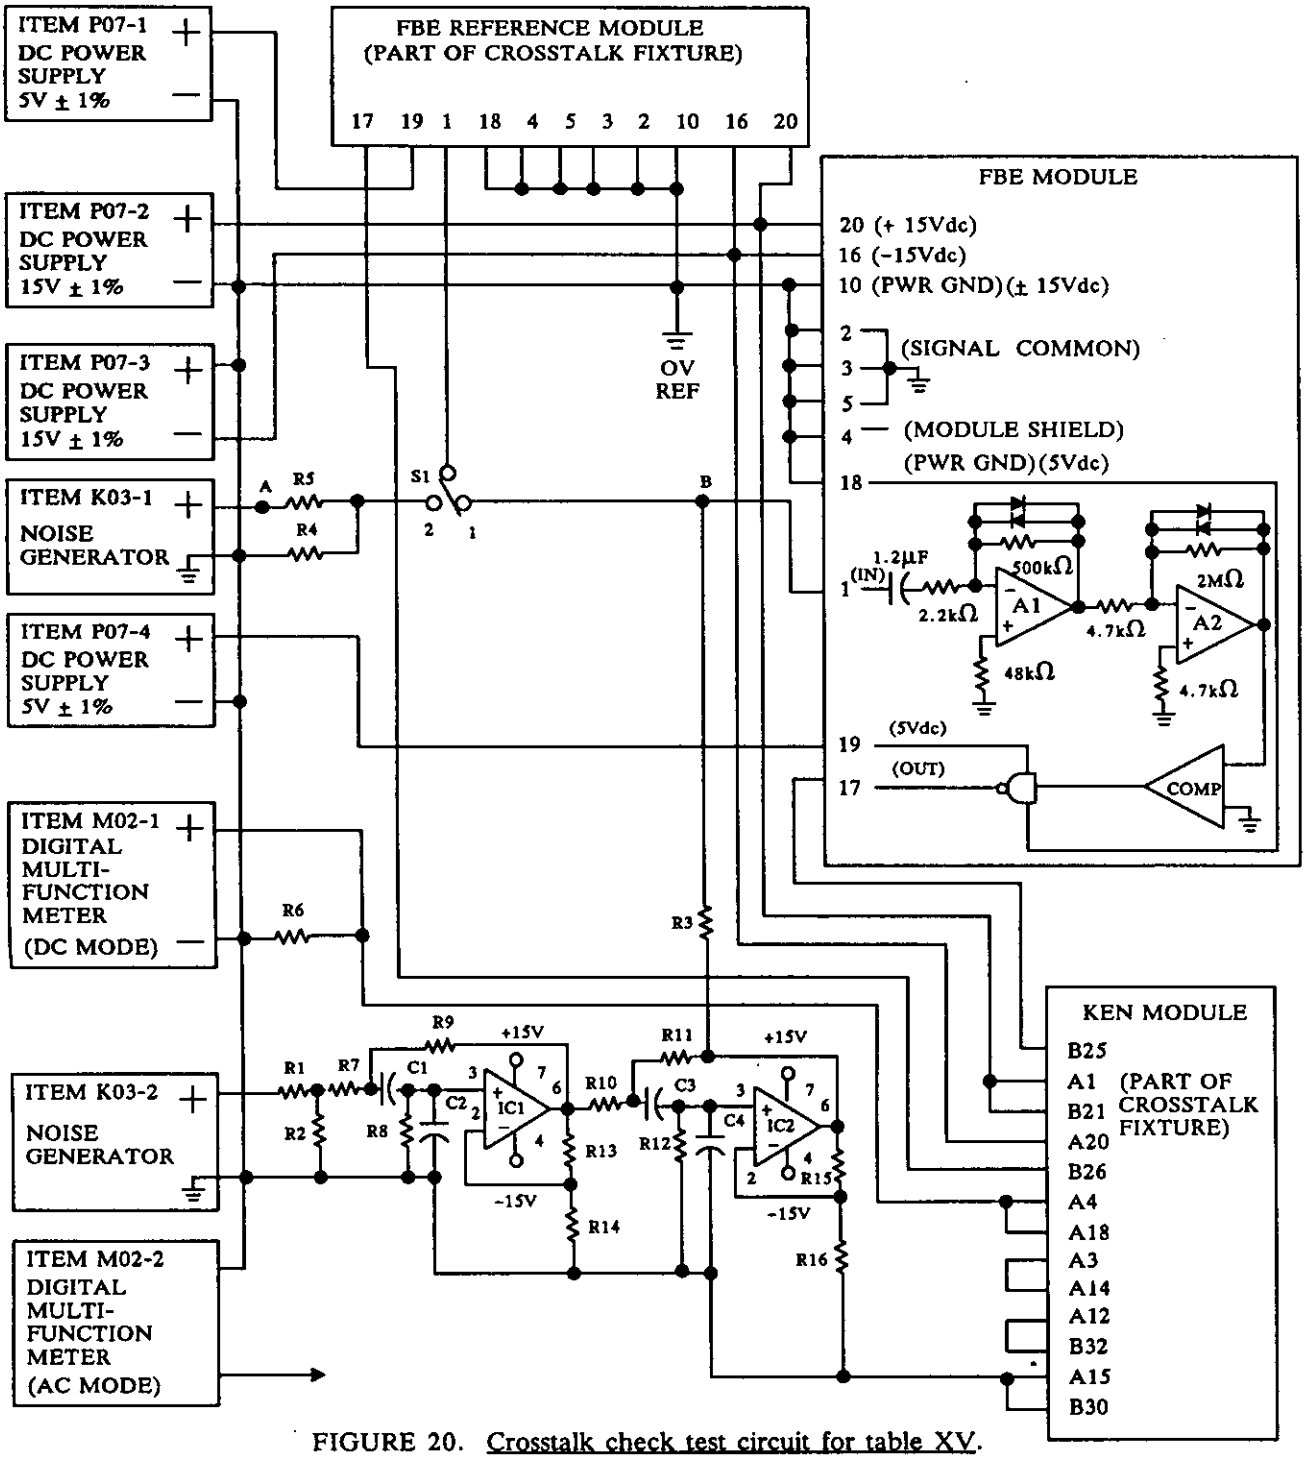


FIGURE 20. Crosstalk check test circuit for table XV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.