INCH-POUND

MIL-M-28787/233B(SH)
AMENDMENT 2
30 March 1992
SUPERSEDING
AMENDMENT 1
19 November 1990

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

AMPLIFIER, CLIPPER, ANALOG, KEY CODE FBE

This amendment forms a part of Military Specification MIL-M-28787/233B(EC), dated 11 June 1979, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 5

4.4.2, third line: Delete "A, B, C, D" and substitute "D, A, B, C".

4.5.1, fifth line: Delete "E through L, M2, M3, N and R" and substitute "E through F2 and G through N".

4.5.3, third line: Delete "E through L, M2, M3, N, and R" and substitute "E through F2 and G through N".

4.5.3, sixth line. Delete "D through R" and substitute "E through F2 and G through N".

PAGE 8

TABLE I: Delete and substitute new table I as printed on page 3 of this amendment.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

MIL-M-28787/233B(SH)
AMENDMENT 2

PAGE 22

TABLE VII, Test condition F3, Min limits column: Delete "30" and substitute "4".

PAGE 43

FIGURE 20: Delete and substitute new figure 20 as printed on page 4 of this amendment.

Preparing activity:
Navy - SH

(Project 5963-N830)

Agent: NW



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

| Test cond. | Parameter | Ref test table | Test type 1/-3/ | Acceptance requirements 25 ± 5°C ambient temperature | | | | Operating temperature 0 to 60°C | | | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Initial | | End-of-life | | Initial | | End-of-life | | |
| | | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| A | $V_S$ stress output signal | II | Q | 900 | 1100 | 900 | 1100 | 900 | 1100 | 900 | 1100 | Hz |
| B | Output short circuit current | III | Q | 20 | 100 | 20 | 100 | 20 | 100 | 20 | 100 | mA |
| C | Recovery time | IV | S | 0 | 100 | 0 | 100 | 0 | 100 | 0 | 100 | ms |
| D1 | Isolation, frame | V | S | 10 | ∞ | 1.0 | ∞ | 10 | ∞ | 1.0 | ∞ | MΩ |
| D2-D11 | Isolation, pin to pin | V | X | 10 | ∞ | 1.0 | ∞ | 10 | ∞ | 1.0 | ∞ | MΩ |
| E1, E3 | Output signal, voltage, low level | VI | X | 0.0 | 0.5 | 0.0 | 0.5 | 0.0 | 0.5 | 0.0 | 0.5 | V |
| E2, E4 | Output signal, voltage, high level | VI | X | 2.5 | 5.0 | 2.5 | 5.0 | 2.5 | 5.0 | 2.5 | 5.0 | V |
| E5 | Output signal, 10 kHz | VI | X | 96 | 104 | 96 | 104 | 96 | 104 | 96 | 104 | µs |
| E6 | Output signal, small signal bandwidth check | VI | S | 1.8 | 2.2 | 1.8 | 2.2 | 1.8 | 2.2 | 1.8 | 2.2 | µs |
| F1 | Transition time ($t_{TLH}$) | VII | X | 18 | 70 | 18 | 70 | 18 | 70 | 18 | 70 | ns |
| F2 | Transition time ($t_{THL}$) | VII | X | 5 | 70 | 5 | 70 | 5 | 70 | 5 | 70 | ns |
| * F3 | Transition time ($t_{TLH}$) | VII | Q | 4 | 100 | 4 | 100 | 4 | 100 | 4 | 100 | ns |
| G1-G2 | Propagation delay time ($t_{PLH}$ and $t_{PHL}$) | VII | X | 100 | 300 | 100 | 300 | 100 | 300 | 100 | 300 | ns |
| H1-H2 | Power supply current, ± 15V | VIII | X | 10 | 50 | 10 | 50 | 10 | 50 | 10 | 50 | mA |
| H3 | Power supply current, 5V | VIII | X | 2 | 20 | 2 | 20 | 2 | 20 | 2 | 20 | mA |
| J | Input impedance check | IX | S | 0.50 | 1.01 | 0.50 | 1.01 | 0.50 | 1.01 | 0.50 | 1.01 | V rms |

3

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.

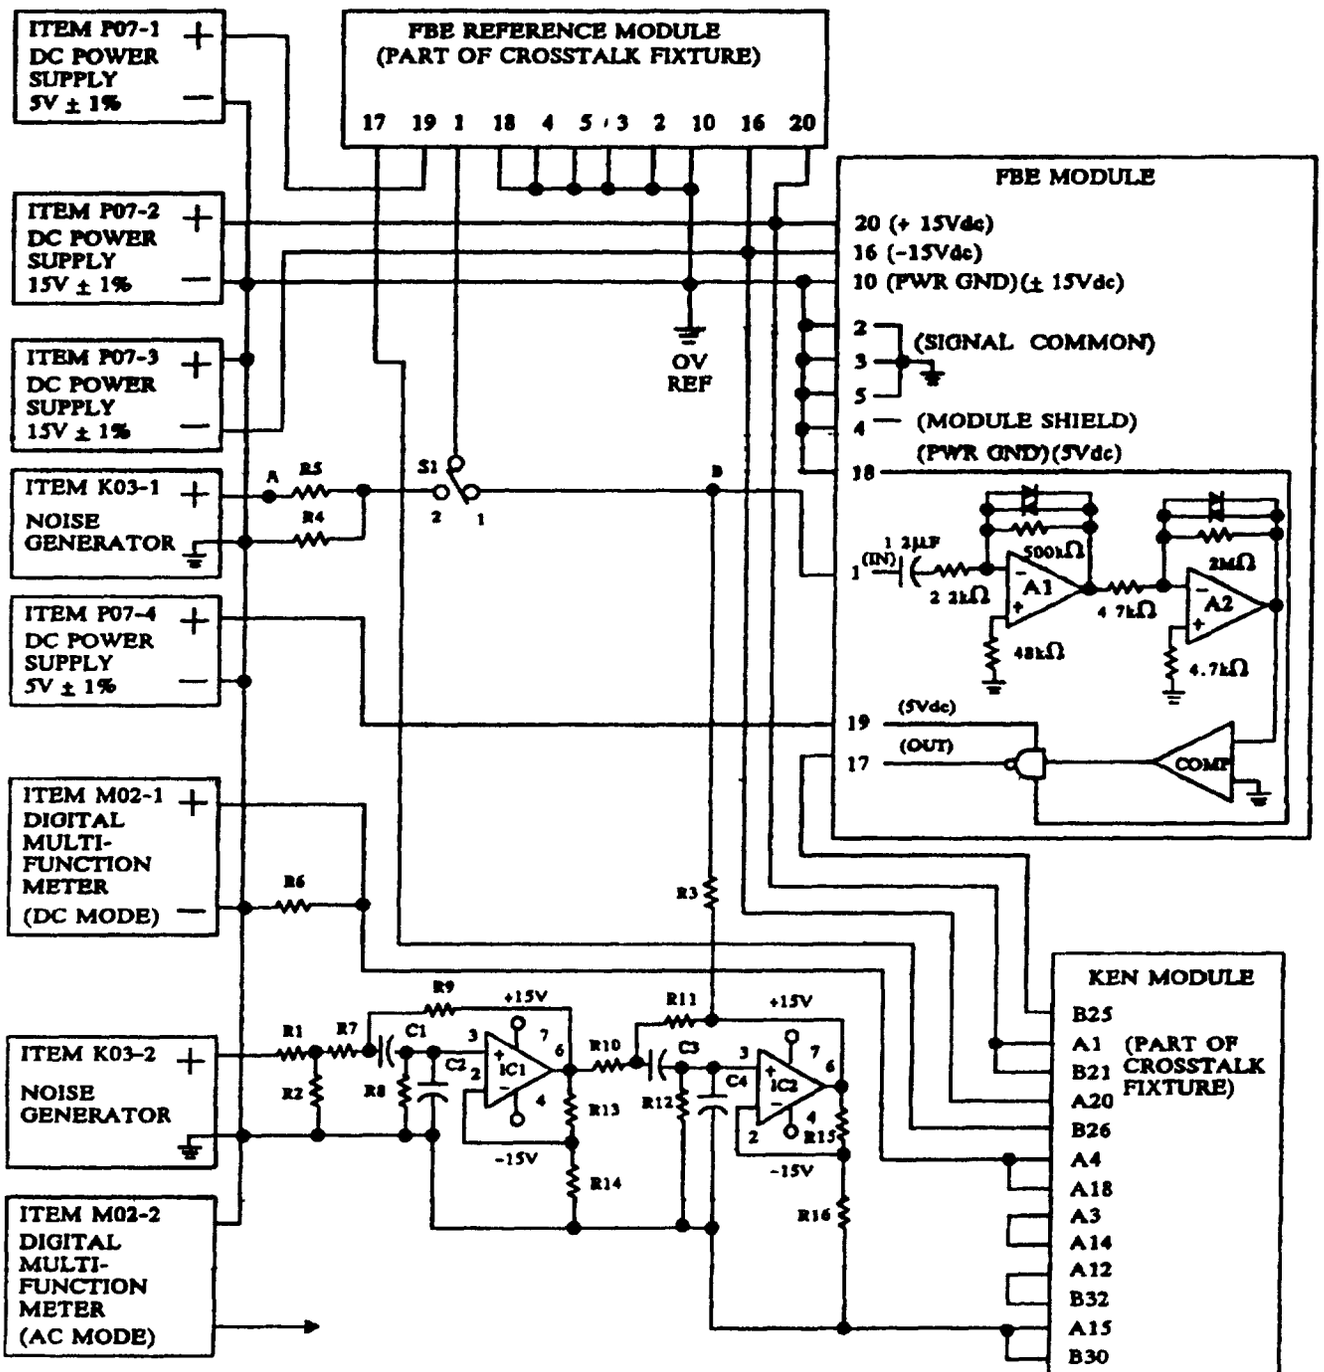



FIGURE 20. Crosstalk check test circuit for table XV.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:50Z
Check the source to verify that this is the current version before use.