MIL-I-45916B
24 July 1975
SUPERSEDING
MIL-I-45916A
25 April 1969

MILITARY SPECIFICATION

INSERT, SCREW THREAD - THREAD CUTTING AND THREAD FORMING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers solid bushing screw thread inserts having thread cutting and thread forming external threads.

1.2 Classification. Inserts shall be furnished in the following types, as specified (see 6.2).

Type I - Thread cutting, regular wall.
Type IA- Thread cutting, thin wall.
Type II- Thread forming.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-A-225/6	-	Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn, or Cold Finished, 2024.
QQ-A-250/6	-	Aluminum Alloy 5083, Plate and Sheet.
QQ-A-601	-	Aluminum Alloy Sand Castings.
QQ-B-626	-	Brass, Leaded and Nonleaded: Rod, Shapes, Forgings, and Flat Products With Finished Edges (Bar and Strip).
QQ-P-35	-	Passivation Treatments For Corrosion-Resisting Steel.
QQ-P-416	-	Plating, Cadmium (Electrodeposited).
PPP-H-1581	-	Hardware (Fasteners and Related Items), Packaging and Packing for Shipment and Storage of.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

Military

MIL-F-495 - Finish, Chemical, Black, for Copper Alloys.
MIL-I-6866 - Inspection, Penetrant Method of.
MIL-I-6868 - Inspection Process, Magnetic Particle.
MIL-A-8625 - Anodic Coatings, for Aluminum and Aluminum Alloys.
MIL-L-8937 - Lubricant, Solid Film, Heat Cured.

STANDARDS

Federal

Fed. Std. No. 66 - Steel, Chemical Composition and Hardenability
Fed. Test Method Std. No. 151 - Metals; Test Methods

Military

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MS35914 - Insert, Screw Thread-Thread Cutting.
MS51836 - Insert, Screw Thread-Thread Forming.
MS51837 - Insert, Screw Thread-Thread Forming, Hole Dimensions for and Installation of.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

American National Standards Institute (ANSI) Standard:

ANSI B46.1 - Surface Texture

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, N.Y., 10018.)

National Bureau of Standards Handbook:

H28 - Part I - Screw Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

American Society for Testing and Materials (ASTM) Standard:

ASTM E10 - Brinell Hardness of Metallic Materials.
ASTM E18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA, 19103.)

3. REQUIREMENTS

3.1 Material. Unless otherwise specified (see 6.2), inserts shall be made of the materials specified herein.

3.1.1 Carbon steel. Carbon steel shall be in accordance with Fed. Std. No. 66, as specified in MS35914 and MS51836.

3.1.2 Corrosion-resisting steel. Corrosion-resisting steel shall be type 303 in accordance with Fed. Std. No. 66, as specified in MS35914 and MS51836.

3.1.3 Brass. Brass shall be in accordance with QQ-B-626, as specified in MS51836.

3.2 Protective coating. When specified (see 6.2), inserts shall be furnished with one of the following protective finishes.

3.2.1 Cadmium plating. Carbon steel inserts shall be cadmium plated in accordance with QQ-P-416, Type II, Class 3.

3.2.2 Passivation. Corrosion-resisting steel inserts shall be passivated in accordance with QQ-P-35.

3.2.3 Black chemical. Brass inserts shall have a black chemical finish in accordance with MIL-F-495.

3.3 Lubrication. Type II inserts with self-locking internal threads shall be solid film lubricated. The lubricant shall be in accordance with MIL-L-8937.

3.4 Dimensions. The design, dimensions and tolerances of inserts shall be as specified in MS35914 and MS51836. Dimensions and tolerances shall apply after application of protective coating and prior to application of lubricant.

3.5 Thread locking feature. The locking element for Type I inserts shall be nylon. The insert and internal thread locking devices for Type II inserts shall be an integral, all metal

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

unit. Threads in the area of the locking feature on Type II inserts may be displaced or deformed. The installed insert shall provide a locking torque with the mating screw or bolt within the limits of Table I.

TABLE I
Internal Thread Self-Locking
Torque (Inch-Pounds)

Fine Threads			Coarse Threads		
Nom. Size Internal Thread	Maximum Locking Torque	Minimum Breakaway Torque	Nom. Size Internal Thread	Maximum Locking Torque	Minimum Breakaway Torque
*.086-64	2.5	**	.086-56	2.5	**
*.112-48	5	**	.112-40	5	**
*.138-40	10	1.0	.138-32	10	1.0
*.164-36	15	1.5	.164-32	15	1.5
.190-32	18	2.0	.190-24	18	2.0
.250-28	30	3.5	.250-20	30	4.5
.3125-24	60	6.5	.3125-18	60	7.5
.375-24	80	9.5	.375-16	80	12.0
*.4375-20	100	14.0	*.4375-14	100	16.5
.500-20	150	18.0	.500-13	150	24.0
*.5625-18	200	24.0	*.5625-12	200	30.0
.625-18	300	32.0	.625-11	300	40.0
.750-16	400	50.0	.750-10	400	60.0

* Inactive for new design.
** Some indication of torque.

3.6 Threads. All threads shall be right hand.

3.6.1 Internal threads. Internal threads shall be in accordance with Handbook H28, Part I, and as specified in MS35914 and MS51836. Thread gaging shall be performed after application of protective coating and prior to application of the lubricant. When a locking feature is employed, the GO plug gage shall enter a minimum of 3/4 turn before engaging the locking device. When the application of a lubricant on Type II inserts prevents the use of standard gages, the inserts shall permit a minimum free rotational bolt thread engagement of 3/4 turn before engaging the locking device.

3.6.2 External threads. External threads shall be a special form to permit a self-threading action when the insert is installed. External threads shall be as specified on MS35914 and MS51836.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

3.6.3 Lead threads. Internal lead threads shall not exceed two pitches, including chamfer.

3.6.4 Concentricity. For Types I and IA, the internal thread pitch diameter shall be concentric with the external pitch diameter within 0.004 TIR for sizes up to and including 0.190, and 0.006 TIR for sizes larger than 0.190 internal thread. For Type II inserts, the internal thread pitch diameter shall be concentric with the external pitch diameter within 0.006 TIR.

3.7 Surface roughness. The surface roughness of the inserts prior to protective coating shall not exceed 125 micro-inches in accordance with ANSI B46.1.

3.8 Mechanical properties.

3.8.1 Pullout resistance. Type I and II inserts shall withstand the pullout strengths specified in Table II with no failure of either the insert or parent material and shall have no elongation in excess of 2%.

3.8.1.2 Type IA inserts shall withstand 90% of the Type I and II pullout strengths specified in Table II.

3.8.2 Rotational resistance (torque-out). Type I and II inserts shall withstand the torque-out strengths specified in Table II with no failure of either the insert or parent material.

3.8.2.1 Type IA inserts shall withstand 90% of the Type I and II torque-out strengths specified in Table II.

3.8.3 Hardness. Inserts shall have a hardness range as specified in MS35914 and MS51836.

3.9 Discontinuities. Inserts shall contain no discontinuities which exceed the following limitations.

When visual inspection discloses discontinuities which show cause for further examination, magnetic particle or penetrant inspection, as applicable, shall be performed.

3.9.1 Cracks. Inserts shall be free from cracks in any direction or location.

3.9.2 Laps and seams (Figure 1). Threads shall have no laps or seams at the root or along the flanks. Laps and seams are permissible at the crest and on the flanks outside the pitch diameter, but shall not exceed 25% of the basic thread depth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

TABLE II
PULLOUT RESISTANCE AND ROTATIONAL RESISTANCE (TORQUE-OUT)

	TYPE I			TYPE II		
NOM SIZE INTERNAL THREAD	INSERT LENGTH (INCH)	PULLOUT STRENGTH (LBS)	TORQUE-OUT STRENGTH (INCH-LBS)	INSERT LENGTH (INCH)	PULLOUT STRENGTH (LBS)	TORQUE-OUT STRENGTH (INCH-LBS)
.086	.188 .156 .125	990 790 595	5 4 3	.190 .160 .120	700 490 350	5 4 3
.112	.234 .187 .156	1,530 1,225 920	8 6 5	.230 .190 .160	1,100 825 560	8 5 4
.138	.281 .218 .187	2,390 1,910 1,435	13 10 8	.280 .220 .190	1,720 1,160 975	13 7 5
.164	.328 .250 .218	3,300 2,640 1,980	18 14 10	.330 .250 .220	2,100 1,300 1,200	18 12 8
.190	.375 .296 .250	4,325 3,460 2,595	30 24 18	.370 .300 .250	3,500 2,200 1,750	30 19 14
.250	.484 .375 .312	7,100 5,680 4,260	40 32 24	.490 .370 .310	5,400 2,900 2,050	40 30 20
.3125	.562 .469 .375	10,400 8,320 6,240	75 60 45	.560 .470 .370	6,700 3,900 2,850	75 50 30
.375	.687 .562 .437	15,790 12,630 9,475	120 104 72	.680 .560 .440	8,100 6,300 4,900	120 70 50
.4375	.781	20,400	160			
.500	.906 .750 .562	26,800 21,440 16,080	200 160 120			
.5625	1.000	31,800	250			
.625	1.125 .937 .687	41,800 33,440 25,080	350 280 210			
.750	1.375 1.125 .812	61,300 49,040 36,780	500 400 300			

Note:
Type I inserts tested in 356T6 aluminum alloy.

Type II inserts tested in 5083-H321 aluminum alloy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

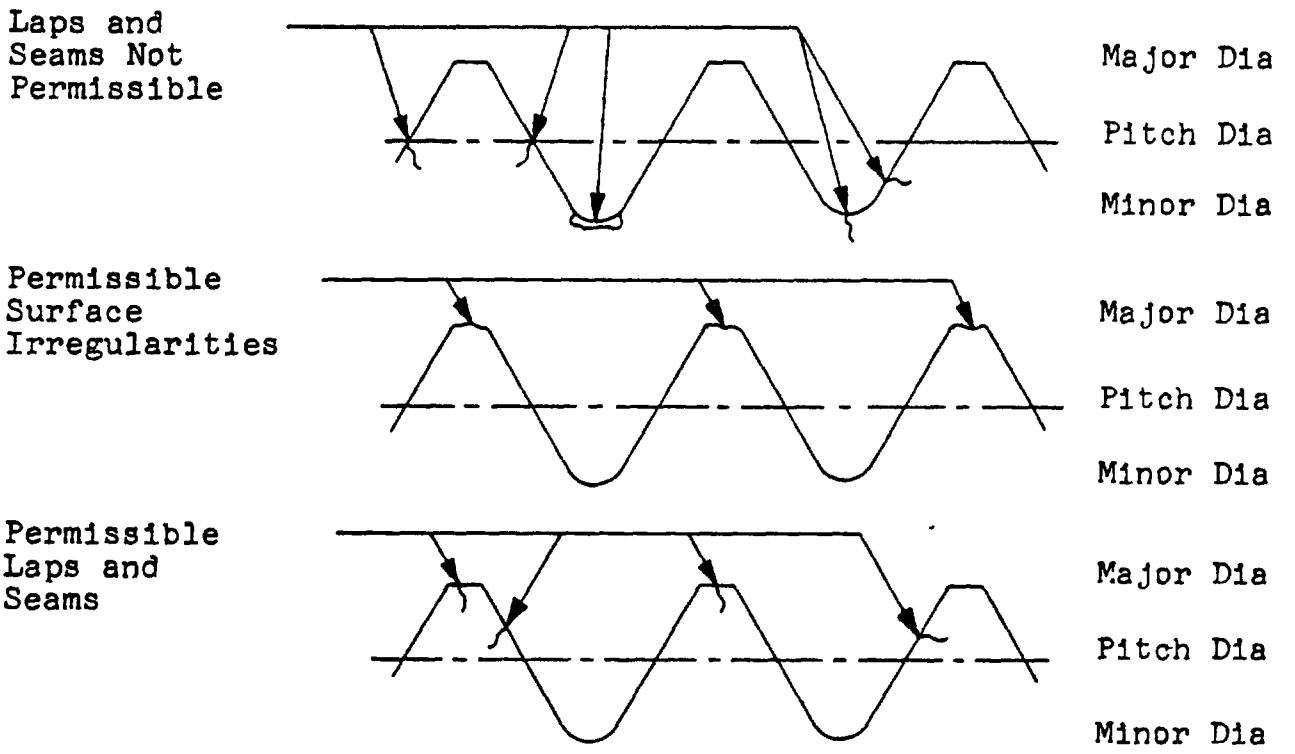


Figure 1

Thread Discontinuities

3.9.3 Surface irregularities. Slight deviation from the thread contour is permissible at the crest of the thread as shown in Figure 1. The incomplete thread at each end of the thread may deviate slightly from contour.

3.9.4 Inclusions. Inserts shall show no evidence of surface or subsurface inclusions at the thread root when examined as specified in 4.5.2. Small inclusions in other parts of the inserts, not indicative of unsatisfactory quality, shall not be cause for rejection.

3.10 Workmanship. Inserts shall be of uniform quality and free from surface contamination and other defects which would be detrimental to their proper use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Lot. A lot shall consist of finished inserts of the same material, type, size, thread and protective coating, produced under the same conditions and offered for acceptance at one time.

4.3 Sampling.

4.3.1 Sampling for examination. A random sample of inserts shall be selected from each lot in accordance with MIL-STD-105, Inspection Level S-4. The Acceptable Quality Level (AQL) shall be as specified in Table III.

4.3.2 Sampling for test. A random sample of inserts shall be selected from each lot in accordance with MIL-STD-105, Inspection Level S-1. The AQL shall be 1.5 percent defective.

4.4 Test materials.

4.4.1 Test blocks. Test blocks shall be fabricated as specified in Figures 2 and 3. Larger test blocks for multiple testing of inserts are permissible when proper distance between holes is maintained.

4.4.2 Test bolts and screws. Bolts and screws for use in all tests shall have Class 3A threads. Bolts and screws used for the internal thread self-locking test shall have 125,000 PSI minimum ultimate tensile strength and shall be cadmium plated in accordance with QQ-P-416, Type II, Class 3. Bolts and screws used for the pullout and rotational resistance tests shall have 180,000 PSI minimum ultimate tensile strength and shall be cadmium plated in accordance with QQ-P-416, Type II, Class 3.

4.5 Examination. Each insert taken as specified in 4.3.1 shall be examined to verify conformance with this specification. Examination shall be conducted in accordance with Table III. Any insert in the sample containing one or more defects shall be rejected, and if the number of defective inserts in any category exceeds the acceptance number for that category, the lot represented by the sample shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

Table III
Classification of Defects

Category	Defect	Inspection Method
Critical	None defined	
Major	AQL = 2.5 percent defective	
101	Material (3.1)	Visual
102	Protective coating, missing or incomplete	Visual
103	Lubrication (3.3 & 4.5.1)	Visual & SIE*
104	Dimensions, except length (3.4)	SIE
105	Thread locking feature, missing or incomplete (3.5)	Visual
106	Threads (3.6, 3.6.1 & 3.6.2)	SIE
107	Concentricity (3.6.4 & 4.5.3)	SIE
108	Surface roughness (3.7)	SIE
109	Discontinuities (3.9 & 4.5.2)	Visual & SIE
Minor	AQL = 4.0 percent defective	
201	Length (3.4)	SIE
202	Lead threads (3.6.3)	Visual
203	Workmanship (3.10)	Visual

*SIE = Standard Inspection Equipment

4.5.1 Lubrication. The solid film lubricant coating used on Type II inserts shall be examined visually and microscopically at 10X magnification for uniformity in color, smoothness and thickness, evidence of cracks, bubbles, blisters, runs, foreign matter, grit, separation of ingredients and any other surface imperfections, and to verify conformance with 3.3.

4.5.2 Discontinuities. Magnetic particle inspection in accordance with MIL-I-6868 for carbon steel and penetrant particle inspection in accordance with MIL-I-6866 for corrosion-resisting steel shall be used to determine the presence of cracks, laps, seams and inclusions. Magnetic particle or penetrant indications alone shall not be cause for rejection, and such inserts shall be sectioned and discontinuities measured microscopically under 10X magnification to determine conformance with 3.9. The inspection shall be performed on finished inserts, free of lubrication and subsequent to any processing operation which could adversely affect the inserts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

4.5.3 Concentricity. The internal thread pitch diameter shall be examined for concentricity with the external thread pitch diameter using a comparator and suitable thread form chart. Concentricity shall be checked while rotating the insert and observing the total eccentricity of the external thread pitch diameter relative to the thread chart.

4.6 Tests.

4.6.1 Installation. Each insert taken as specified in 4.3.2 shall be visually inspected under 10X magnification and installed in accordance with MS35914 or MS51837 in test blocks specified in 4.4.1. The presence of cracks in either the test block or the insert as a result of installation shall be cause for rejection. When visual inspection discloses a condition which shows cause for further examination, the test specimen shall be magnetic particle or penetrant inspected in accordance with MIL-I-6868 or MIL-I-6866.

4.6.2 Internal thread self-locking. Test specimens installed into test blocks (Figure 3) as specified in 4.6.1 shall be used for torque testing of the internal thread locking feature, when applicable. Specimens used for the pullout and rotational resistance tests shall not be used for the self-locking test.

4.6.2.1 Screw-locking torque. The torque test shall consist of a 15 cycle room temperature torque test, using test bolts or screws in accordance with 4.4.2 having sufficient thread length to extend beyond the locking feature a minimum of two pitches (including bolt thread chamfer). A new bolt or screw and a new test specimen shall be used for each complete 15 cycle test. Bolts and screws shall assemble freely, with the fingers, up to the locking feature. The bolt or screw shall be engaged and disengaged from the insert self-locking area for 15 full installation and removal cycles with no axial load on the insert. The test shall be run at a rate slow enough to yield a dependable measure of torque and avoid heating of the bolt. A bolt shall be considered fully installed when two threads extend past the end of the locking feature of the insert; the removal cycle shall be considered complete when the locking feature is disengaged.

4.6.2.2 Maximum locking torque. Maximum locking torque shall be the maximum torque value encountered on any installation or removal cycle, and shall not exceed values specified in Table I. Maximum locking torque readings shall be recorded on the first, seventh and fifteenth installation cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

4.6.2.3 Minimum breakaway torque. Minimum breakaway torque shall be the minimum torque required to start removal of the screw or bolt from a fixed position during the first one-half turn of the removal cycle. The torque value for any cycle shall not be less than the applicable value specified in Table I. Minimum breakaway torque reading shall be recorded at the start of the first, seventh and fifteenth removal cycle.

4.6.3 Pullout resistance. Test specimens installed into test blocks (Figure 2), as specified in 4.6.1 shall be used for the pullout resistance test. The test bolt shall assemble freely into the insert, prior to engaging the self-locking device, with finger torque and shall be of sufficient length to extend through the insert a minimum of two pitches (including bolt thread chamfer.) The bushing and test block clearance holes in the upper and lower yokes (Figure 4) shall have a free fit not in excess of 0.060 inch greater than the bushing and test block diameters. The bolt clearance hole in the upper bushing (Figure 4) shall be 0.005 to 0.015 inch diameter larger than the nominal diameter of the test bolt. The minimum pullout strength specified in Table II shall then be applied to the assembly. Failure of the insert to stay in the test block or failure of the internal thread shall not occur below the loads specified in Table II. If bolt failure occurs below the applicable pullout strength rating, the test shall be repeated until the minimum pullout strength of the insert is exceeded. Rate of loading shall not exceed 100,000 PSI per minute per square inch based on the shank diameter area of the bolt.

4.6.4 Rotational resistance. Test specimens installed into test blocks (Figure 3), as specified in 4.6.1, shall be used for the rotational resistance test. When the near side face of the insert is installed in accordance with MS35914 or MS51837, the far side of the insert shall extend a distance of one and one-half to two external thread pitches of the insert past the far side of the test block allowing it to fit into the countersink of the bushing. The test bolt or screw specified in 4.4.2 shall enter the insert from the back side (opposite normal entry), and shall be torqued in a clockwise direction. The test assembly shall be as illustrated in Figure 5. Torque-out strengths, with no axial load on the insert, shall not be less than the values specified in Table II.

4.6.5 Hardness. Each insert taken as specified in 4.3.2 shall be hardness tested in accordance with ASTM E10 or E18 to verify conformance with 3.8.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

4.7 Chemical analysis. The supplier shall furnish a mill certificate specifying the chemical composition of the material used in the manufacture of the inserts. When specified (see 6.2), chemical analysis shall be in accordance with Method 111.2 or 112.2 of Fed. Test Method Std. 151. In case of dispute, Method 112.2 shall apply.

4.8 Protective coating. Examination and test of protective coatings shall be in accordance with the applicable specification of 3.2.

4.9 Preparation for delivery. Examination and test of preparation for delivery shall be in accordance with PPP-H-1581, to verify conformance with Section 5.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing. Packaging shall be Level A or C and packing shall be level A, B or C in accordance with PPP-H-1581, as specified (see 6.2).

6. NOTES

6.1 Intended use. Inserts covered by this specification are intended as general purpose fasteners with self-threading external threads of the following types:

Type I and IA inserts are designed to tap their own threads to provide strong wear and thread resistance in soft, weak metals, cast iron, mild steel, plastics and wood.

Type II inserts are designed for use in yielding materials such as aluminum and magnesium alloys, and plastics.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Type (1.2).
c. Applicable MS part number.
d. Material (3.1).
e. Protective coating (3.2).
f. Chemical analysis, when required (4.7).
g. Selection of applicable level of packaging and packing (5.1).

6.3 Definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

6.3.1 Crack. A crack is a clean crystalline break passing through the grain or grain boundary without the inclusion of foreign elements.

6.3.2 Lap. A lap is a surface defect appearing as a seam, caused by the folding over of metal fins or sharp corners and then rolling or forging them into the surface, but not welding them.

6.3.3 Seam. A seam is an unwelded fold or lap which appears as an opening in the raw material as received from the source.

6.3.4 Inclusion. An inclusion is a non-metallic material in a solid metallic matrix.

6.4 Patents. Type II inserts are manufactured under United States Patent No. 3,200,691 which expires on 17 August 1982 and United States Patent No. 3,202,195 which expires on 24 August 1982. The Government does not have a royalty free license.

Custodians:
Army - WC
Navy - None
Air Force - 82


Preparing Activity:
Army - WC

Project No. 5340-1064

Reviewers:
Army - AT, MI, MU
Navy - None
Air Force - None
DSA - IS

Users:
Army - AV, ME, WV
Navy - MC, OS
Air Force - None

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

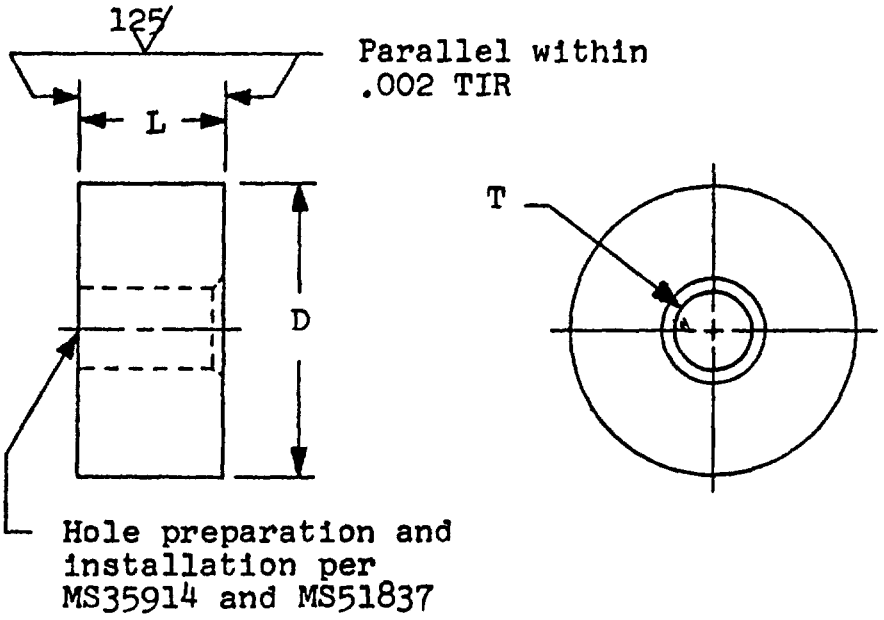

1. Dimensions:

   T - Recommended hole size.
   D - 4 x T or minimum distance between holes.
   L - Insert length plus 0.063 inch.

2. Material:


   Type I and IA inserts - Aluminum alloy, 356T6 per QQ-A-601.
   Type II - Aluminum alloy, 5083-H321 per QQ-A-250/6.

3. Anodize per MIL-A-8625, Type I or II, Class 1.

4. Discontinuities or cracks are not acceptable.

FIGURE 2
Pullout Test Block

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

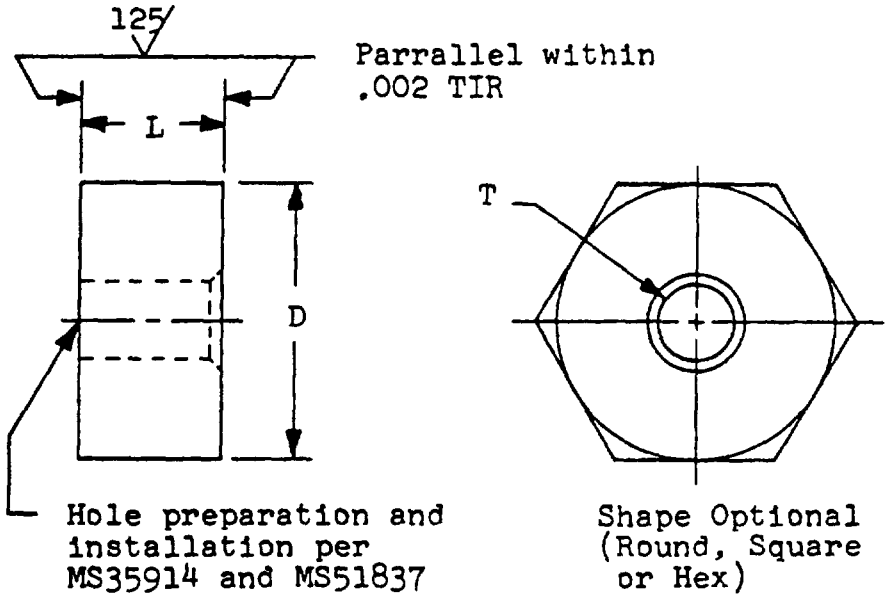

1. Dimensions:

T - Recommended hole size.
D - 4 x T or minimum distance between holes
L - Insert length minus 0.063 inch for rotational resistance test (4.6.4).
L - Insert length plus 0.063 inch for internal thread self-locking test (4.6.2).

2. Material:


Type I and IA inserts - Aluminum alloy, 356T6 per QQ-A-601.
Type II - Aluminum alloy, 5083-H321 per QQ-A-250/6.

3. Anodize per MIL-A-8625, Type I or II, Class 1.

4. Discontinuities or cracks are not acceptable.

FIGURE 3
Torque Test Block


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

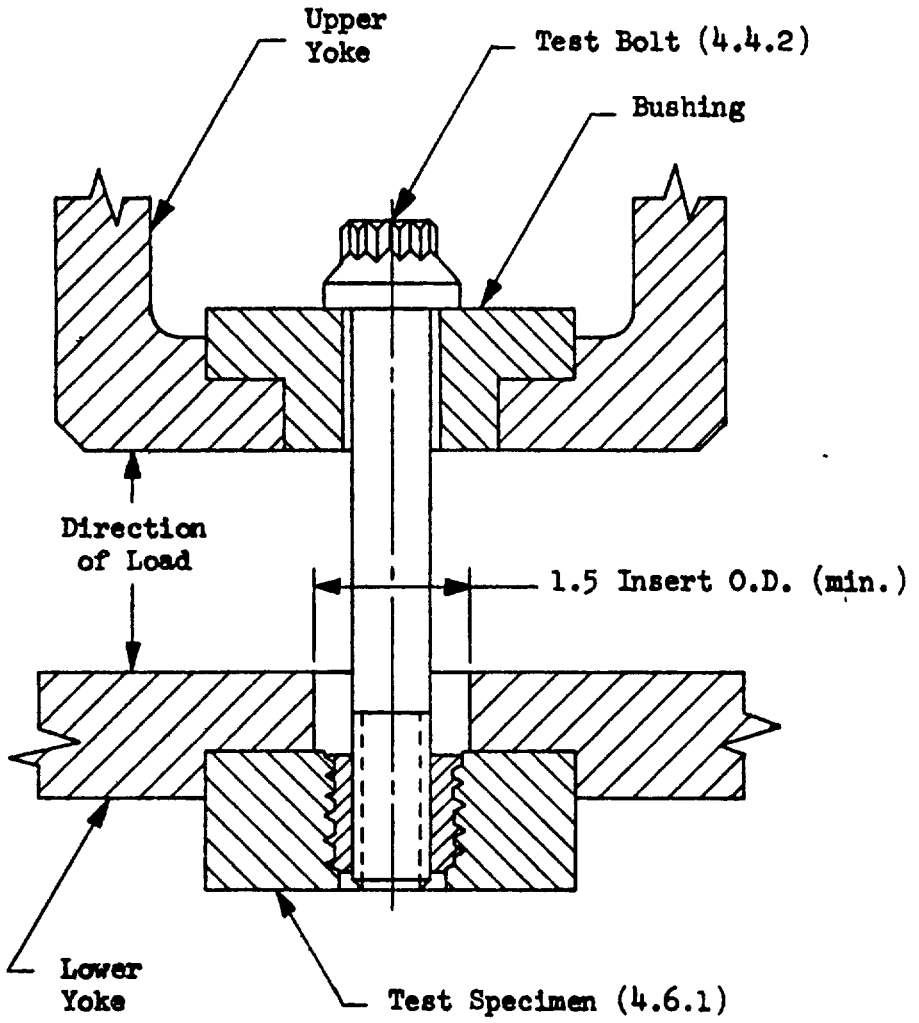

Note: Lower yoke counterbore is optional, but 1.5 Insert O.D. (min) clearance hole shall be maintained.

FIGURE 4
Pullout Resistance Test
Fixture (4.6.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

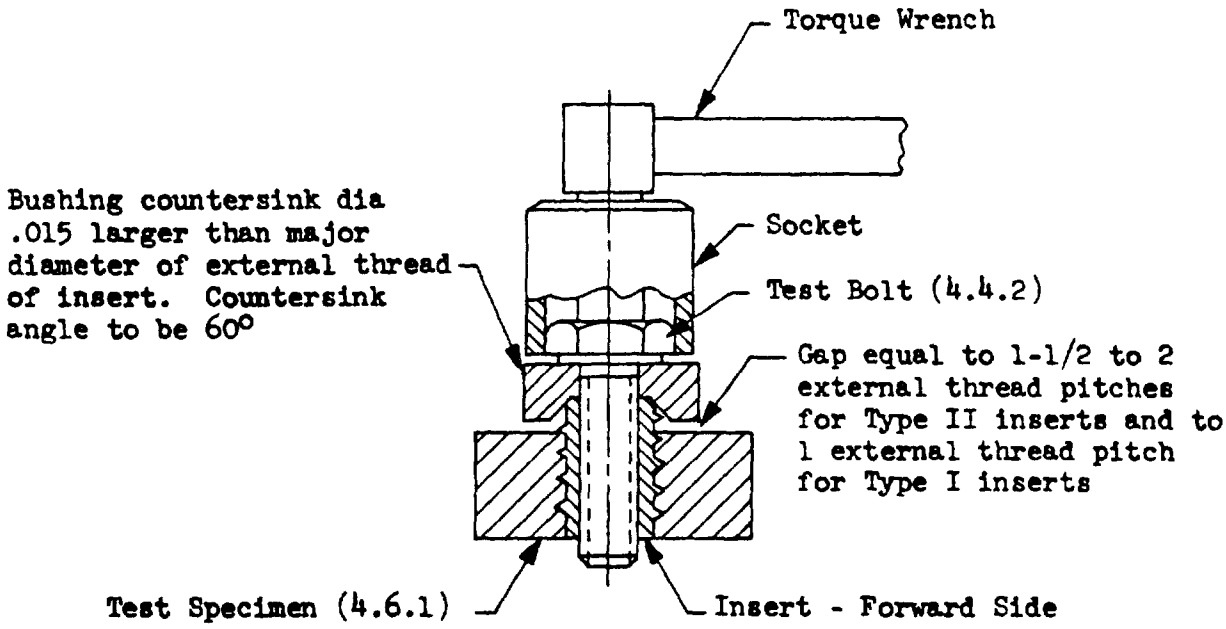

NOTE: Above test procedure used with insert in the as received condition.

FIGURE 5
Rotational Resistance Test Fixture (4.6.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

NSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in ubmitting comments and suggestions for improvements All users of military standardization documents are invited to provide uggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and ailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was o rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the roblems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an cknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being onsidered

OTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of pecification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization o waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

EPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

FFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armement Research and Development Command
ATTN: DRDAR-TST-S
Dover, NJ 07801

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:13Z
Check the source to verify that this is the current version before use.