INCH-POUND

MIL-I-45932
AMENDMENT 2
17 OCTOBER 1997

MILITARY SPECIFICATION

INSERT, SCREW THREAD – THIN WALL, LOCK IN

This amendment forms a part of MIL-I-45932, dated 21 APRIL 1971, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Change FSC from 5340 to 5325.

PAGE 18

Delete in its entirety and replace with the attached page 18.

Custodians:
Army - AR
Navy - AS
Air Force – 99

Preparing Activity:
DLA-IS


(Project 5325-0395-01)

Review activity:
Army - AT, AV, CR4, MI
Navy - MC, OS, YD1
Air Force - 82
NSA - NS

AMSC N/A FSC 5325

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:17Z
Check the source to verify that this is the current version before use.

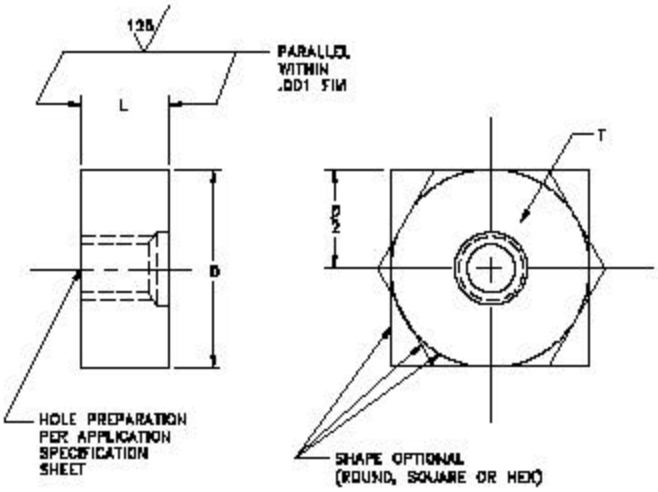

Notes:

1. Dimensions:

T – Nominal thread diameter of applicable insert external thread.

D – 4 x T. (Optional 2 x T may be used).

(a) L – Length of applicable insert plus .020 for rotational resistance tests (see 3.9.3)

(b) L – Length of applicable insert plus .063 for internal locking and breakaway toque tests (3.7.6)

(b) L – Length of applicable insert plus .063 for axial and pullout tests (3.9.1), (3.9.2).

2. Material:

*** (a) Aluminum alloy, 2024-T4 per QQ-A-225/6 (bar) (UNS A92024).**

*** (b) Aluminum alloy, 2024-T4 per QQ-A-225/6 (bars and rods) (UNS A92024).**

*** (c) Aluminum alloy 5083-H321 per QQ-A-250/6 (UNS A95083). For pullout test (3.9.2)**

Optional material: 6061-R6 per AMS4117 or QQ-A-225/8 or 6061-T651 per AMS4128 or QQ-A-225/8.

FIGURE 2. Toque and axial load test blocks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:17Z
Check the source to verify that this is the current version before use.