MIL-D-45926(WC)

23 July 1974
SUPERSEDING
(See Section 6)

MILITARY SPECIFICATION

DRUM, AMMUNITION, ROTARY, 40MM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers left hand and right hand ammunition drum assemblies for use on the M28A1 Helicopter Armament subsystem. The left hand or right hand drum assembly as applicable, hereinafter referred to as the drum, shall consist of an inner and outer drum, gear reduction drive, drive motor, rounds counter switch, last rounds switch, and drum support and exit chute for supplying 40mm ammunition to the M129 Grenade Launcher.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military		
MIL-W-13855	-	Weapons, Small Arms and Aircraft Armament Subsystem, General Specification for.
MIL-P-14232	-	Parts, Equipment and Tools for Army Materiel, Packaging and Packing of.
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition of.
MIL-A-45967	-	Armament Subsystem Helicopter: M28A1.

STANDARDS

Military		
MIL-STD-109	-	Quality Assurance Terms and Definitions.

FSC 1090

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

DRAWINGS

U.S. Army Weapons Command		
J11689555	-	Drum, Ammunition - RH, 40MM.
J11689556	-	Drum, Ammunition - LH, 40MM.
IEL11689555	-	Inspection Equipment List.
IEL11689556	-	Inspection Equipment List.

(Product drawings referenced in this specification form a part of J11689555 or J11689556, as applicable; acceptable inspection equipment drawings form a part of IEL11689555 or IEL11689556 as applicable.)

PUBLICATIONS

U.S. Army Weapons Command		
P11689555	-	Packaging Data Sheet for Drum, Ammunition, RH, 40MM.
P11689556	-	Packaging Data Sheet for Drum, Ammunition, LH, 40MM.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. Requirements for submission of first article shall be as specified in the contract (see 6.2). Unless otherwise specified (see 6.2), the first article shall include the pilot pack (see 5.1).

3.2 Material, construction and design. Drums shall conform to the material, construction and design requirements specified herein, on Drawing J11689555 or J11689556 as specified (see 6.2), and in MIL-W-13855.

3.2.1 Weight. The weight of the drum shall not exceed 75 pounds.

3.2.2 Storage capacity. The drum shall provide storage for a minimum of 265 rounds of 40mm ammunition belted with M16 series links. Testing shall be as specified in 4.5.3.2.

3.3 Performance.

3.3.1 Functioning. Drums shall provide a smooth transition of a full complement of 40mm ammunition through the drum and exit chute during the following duty cycle, when operated under the conditions specified in 3.3.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

3.3.1.1 Duty cycle. A duty cycle shall be defined as the motor on for 10 seconds followed by a rest of 15 seconds. This sequence shall be repeated four times, or the time required to unload a full complement of ammunition, whichever is less.

3.3.1.2 Operating conditions. The drum shall unload a full complement of ammunition at the rate of 400 + 10% - 5% rounds per minute. The steady state current shall not exceed 8 amps when supplied with normal voltage of 24 - 30 vdc. With the drum empty of ammunition, the steady state current draw shall not exceed 3.25 amps at the above specified rate and voltage. Testing shall be as specified in 4.5.3.2.

3.3.1.3 Low voltage rate. The drum shall operate at a rate of at least 360 rounds per minute when the voltage is decreased to 22 vdc. Testing shall be as specified in 4.5.3.2.

3.3.1.4 Rounds counter switch. Electrical continuity shall be indicated between pins E and F of connector A8J1 for the right hand (RH) drum and pins E and F of connector A4J1 for the left hand (LH) drum each time the rounds counter switch is actuated. The rounds counter switch on both drums shall actuate for every 12 $\pm$ 0.5 degrees of rotation of the inner drum. Testing shall be as specified in 4.5.3.2.

3.3.1.5 Last rounds switch. The last rounds switch shall return to the switch non-actuated position (electrically open) when the last round has passed the exit chute. The actuator bar shall actuate the switch (electrically closed) when there is ammunition in the exit chute. The distance between the actuator bar and switch plunger in the non-actuated position shall be .010 to .030 inch. Testing shall be as specified in 4.5.3.2.

3.4 Interchangeability. Unless otherwise specified on the drawings, all replacement parts shall be interchangeable. (In normal assembly operations, there shall be no objections interposed to preferential assembly of parts provided all parts are dimensionally and functionally acceptable.) Testing shall be as specified in 4.5.3.3.

3.5 Reliability. When specified in the contract (see 6.2), the drum shall have a minimum acceptable Mean-Mission-Between-Failure (MMBF) of not less than 45 missions and a desired and specified MMBF of 68 missions. A mission is defined as those of the drum necessary to expend 265 rounds of 40mm ammunition during a two (2) hour flight. A failure is defined as an event which causes damage of complete stoppage of rounds movement through the ammunition drum and is attributable to the ammunition drum. Testing for reliability shall be in accordance with 4.4 and 4.6.2.

3.5.1 Reliability criteria. The reliability requirement is based on a minimum acceptable Mean-Rounds-To-Stoppage (MRTS) of 12,000 rounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

3.6 Environmental conditions. When specified in the contract (see 6.2), the drum shall be capable of satisfying the specific environmental conditions in accordance with MIL-A-45967 for the subsystem. When subjected to the environmental conditions, the drum shall not exhibit any detrimental damage or deterioration which would prevent acceptable performance. Testing shall be in accordance with 4.4.

3.7 Electromagnetic interference (EMI). When specified in the contract (see 6.2), the drum shall be capable of satisfying the specific EMI requirements in accordance with MIL-A-45967 for the subsystem. When subjected to the EMI requirement the drum shall not exhibit any detrimental damage or deterioration which would prevent acceptable performance. Testing shall be in accordance with 4.4.

3.8 Marking. Each drum shall be marked in accordance with the applicable drawing and MIL-W-13855. Drums shall be identified by serial numbers assigned by the procuring activity (see 6.2).

3.9 Workmanship. Workmanship shall be in accordance with MIL-W-13855.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

4.3 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.4 First article inspection. The first article (initial production unit(s) shall be submitted for inspection in accordance with contract requirements (see 6.2). The first article shall be representative of the production processes used during quantity production. The first article shall be subjected to quality conformance inspection specified herein and when specified in the contract, the reliability test (see 3.5 and 4.6.3), environmental test (see 3.6), electromagnetic interference (EMI) test (see 3.7), and such other inspection as is necessary to determine compliance with the requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection.

4.5.1 Examination.

4.5.1.1 Component parts and concurrent repair parts. Examination of component parts and concurrent repair parts shall be as specified in the contract (see 6.1). Examination of these parts shall be accomplished prior to their assembly into the end item or submission for acceptance as repair parts.

4.5.1.2 Inspection methods. The following provisions shall be applicable to the prescribed inspection methods. Request for a method other than that specified shall be submitted to the Government for approval.

a. Examination for workmanship shall include examination for missing operations and the presence of nicks, cracks, burs, scratches, toolmarks, deformations or other signs of poor workmanship. Pieces shall be carefully compared with a specimen of known acceptable quality and shall conform to the requirement of 3.5.
b. Where "Visual" is specified as the inspection method for dimensional inspection, the characteristic shall be either scaled or compared with a specimen of known acceptable quality that has been established as an inspection standard, for conformance to the requirements of the drawing.
c. Where "Visual" is specified as the inspection method for protective coating, the coating shall be visually examined for completeness, uniformity in appearance and color, and for freedom from pits, corrosion, scratches, and worn or bare spots.
d. Where "Visual" is specified as the inspection method for functioning assembly requirements, the assembly shall be visually examined for completeness and manually operated for functioning requirements.
e. Where "SMTE" (Standard Measuring and Test Equipment) is specified as the method of inspection, the contractor may use any type of industry developed, commercially available, multi-usage equipment or special inspection and/or testing equipment approved by the Government.

4.5.1.3 Drums. Each drum shall be examined as specified below. The examination provisions should be applied at the earliest practical point in manufacture at which it is feasible to inspect for acceptance without risk of change in the characteristics by subsequent operations. Reinspection of these characteristics is not required provided assurance exists that the characteristic has not been changed, degraded, or damaged by subsequent manufacturing, assembly or handling and that adequate inspection records are maintained. Drums failing to meet these requirements shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

Characteristic	Requirement	Inspection Method
a. Missing, damaged or incorrectly assembled component parts	3.2	Visual
b. Actuator bar and switch plunger gap on last rounds switch	3.3.1.5	SMTE
c. Protective finishing or coloring	---	Visual
d. Illegible, incorrect or missing product markings, identification plates, and serial numbers	3.8	Visual
e. Workmanship.	3.9	Visual

4.5.1.3.1 Weight. The first 3 drums produced shall be examined for the weight requirement specified in 3.2.1.

4.5.2 Testing.

4.5.2.1 Failure data. Unless otherwise specified herein, all tests shall be conducted on a complete drum. If test requirements cited herein are not met, acceptance of the drum shall be deferred and the contractor shall accomplish as applicable, the following actions:

a. Conduct a failure analysis study performing a dimensional physical, and visual examination of the components which are suspected to be the cause of failure or malfunction.
b. Evaluate and correct the applicable production processes and procedures to prevent recurrence of the same defects in future production.
c. Examine drums, partially assembled drums and components (including components and subassemblies at in-process or final assembly) to assure that material containing the same defect is purged from the inventory and not presented to the Government for acceptance.
d. Submit the results of the failure analysis and the corrective actions taken to the Government for review and approval prior to submitting a reconditioned lot or reconditioned drum for retest.

4.5.2.2 Function testing. Each drum shall be function tested (see 3.3) to determine compliance with the following requirements employing the designated test methods. Drums failing to meet these requirements shall be cause for rejection.

Requirement	Test method
Storage capacity (see 3.2.2)	4.6.1.2
Operating conditions (see 3.3.1.2)	4.6.1.4
Low voltage rate (see 3.3.1.3)	4.6.1.4
Rounds counter switch (see 3.3.1.4)	4.6.1.3
Last rounds switch (see 3.3.1.5)	4.6.1.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

4.5.2.3 Interchangeability testing. A sample of 3 drums shall be selected from each of the first three month's production and from each alternate month's production thereafter and tested for interchangeability (see 3.4) using the test method specified in 4.6.2. Drums selected for interchangeability shall have been found satisfactory in all other examinations and tests including the function test. Drums shall be function tested after interchange of parts. Failure of the interchangeability test shall be cause for rejection of that month's production. Prior to submission as a reconditioned lot, the supplier's corrections shall be effected on all drums of the lot and on all drums and component parts not yet accepted. Sample size and test methods for reconditioned lots shall be the same as for the original lot. Failure of any interchangeability test shall also be cause to perform an interchangeability test on the next two month's production.

4.5.2.4 Component parts and concurrent repair parts testing. Raw material testing, part testing, and certification shall be performed in accordance with the criteria specified in the contract (see 6.2). This will include chemical analysis and physical tests of materials, tests of protective finish, heat treatment, bonding, and function of parts as applicable. The contractor shall accomplish these tests prior to assembly of parts into the end item.

4.5.3 Packaging examination and testing. Unless otherwise specified (see 6.2), the packaging examination and testing shall be in accordance with MIL-P-14232.

4.5.4 Inspection equipment.

4.5.4.1 Acquisition, maintenance and disposition. Unless otherwise specified, responsibility for acquisition, maintenance and disposition of acceptance inspection equipment prescribed on the List of Inspection Equipment, IEL11689555 or 11689556, and for all other inspection equipment required to perform inspection prescribed by applicable specifications, shall be in accordance with MIL-I-45607.

4.5.4.2 Accuracy of standard measuring equipment. When commercial and modified commercial inspection and test equipment is used, it must be capable of repetitive measurements to an accuracy of 10 percent of the total tolerance of the characteristic being inspected.

4.6 Test methods.

4.6.1 Performance tests. Drums shall be function tested as specified in the following paragraphs using dummy 40mm ammunition belted with M16 series links.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

4.6.1.1 Test set-up. The test equipment required to perform the tests shall include:

a. Power supply - capable of providing a minimum of 20 amperes at 22 - 30 vdc.
b. Azimuth indicator - capable of measuring shaft rotation.
c. Volt ohmmeter - capable of measuring switch continuity.
d. Ammeter - capable of measuring current up to 20 amperes.
e. Chart recorder - capable of recording weapon firing rates.

4.6.1.2 Storage capacity test. Drums shall be manually loaded as specified in 4.6.1, following the loading instructions attached to the drum. Each drum shall load 265 rounds.

4.6.1.3 Rounds counter switch test. Drums shall be tested using an azimuth indicator and a volt ohmmeter. The azimuth indicator shall be mounted on the drum drive shaft at the rear of the drum to determine shaft rotation. The volt ohmmeter shall be connected to terminal pins E and F of connector A4J1 (LH) drum or A8J1 (RH) drum and the following operations performed.

a. Manually rotate the drum drive shaft until the volt ohmmeter indicates a closed circuit and note the reference point on the azimuth indicator.
b. Continue rotating the shaft in the same direction of 360° (degrees) and observe that the volt ohmmeter indicates a closed circuit at each increment of 12 ± 0.5 degrees of rotation.

4.6.1.4 Function Test. The feeding function of the drum shall be tested using a DC power supply, ammeter, volt ohmmeter, and digital rounds counter. The drum shall be loaded as specified in 4.6.1.2 with an excess of 10-12 rounds attached outside the exit chute. The digital rounds counter shall be connected to the rounds counter switch and the ammeter connected to the drive motor. A procedure approved by the Government shall be used to apply an outward pull on the belted rounds of dummy ammunition. The pressure applied should not assist the drum feeding but only keep the links from folding back upon themselves and causing a jam in the exit chute. When the setup is ready, attach the DC power supply and operate the drum assembly as follows:

a. The drum shall be operated at 24 to 30 volts using the duty cycle specified in 3.3.1.1. During this cycle check the feed rate using the digital rounds counter and last rounds switch (3.3.1.4). Also check steady state running current (3.3.1.2).
b. The volt ohmmeter shall be connected to terminal pins G and H of connector A4J1 (LH) drum or A8J1 (RH) drum. The input voltage shall be adjusted to 22 volts and the drum

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

operated until empty. During this cycle check the low voltage rate (3.3.1.3) and last rounds switch requirement (3.3.1.5).

c. The drum shall be operated while empty at 24 to 30 volts to determine compliance with the steady state current requirement (3.3.1.2).

4.6.2 Interchangeability test. Three drums shall be tested for interchange of parts by disassembling and reassembling parts as specified below. Interchange of parts shall be accomplished by marking the Drums #1, #2, and #3, and recording the serial numbers of each drum. Three trays shall be placed in front of each drum to be disassembled and the trays marked as follows:

Drum #1	Drum #2	Drum #3
1A, 1B, 1C	2A, 2B, 2C	3A, 3B, 3C

Each drum shall be disassembled and the parts placed into either Group A, Group B or Group C, according to the Group listing of parts below. Interchange and reassemble the trays of parts so that the interchanged drums shall consist of the following Groups:

Interchanged Drum #1	Interchanged Drum #2	Interchanged Drum #3
1A, 2B, 3C	1B, 2C, 3A	1C, 2A, 3B

Commercial parts such as screws, nuts, washers, and pins shall be placed in the same tray as their mating or associated part. The commercial parts have not been listed in the group parts list below. Any commercial part rendered unserviceable by disassembly shall be replaced without penalty to the interchangeability test. Any noncommercial part rendered unserviceable by disassembly shall be cause for failure of the interchangeability test. After interchange of parts, each reassembled drum shall be function tested in accordance with 4.6.1.4.

GROUP A

11689414	Cover, Dust
11689805	Spring, Helical, Compression
11689547 or 11689548	Structure Assembly, 40MM
11690224 or 11689695	Switch Assembly, Rounds Counter

GROUP B

11689381	Sleeve, Retainer - Bearing Aft
11689382	Sleeve, Retaining Bearing, Aft
11689383	Sleeve, Retaining Bearing, Aft
11689395	Cover, Rounds Counter
11689406	Shaft, Shouldered Flange

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

GROUP C

11689399	Shaft Spline
11689407	Disk, Rounds Counter
11689412 or 11689712	End Plate, Aft
11689447	Bracket, Angle - Helix End
11689472	Drive Assembly
11689533	Motor Assembly
11689545	Drum, Subassembly - Inner
11689791 or 11689792	Support, Ammunition Drum

4.6.3 Reliability test. The reliability test shall be performed by repeating the test cycle defined in 4.6.3.1. For each test cycle, the failure versus test cycles data shall be cumulatively plotted. Testing shall be terminated whenever a decision point as defined in Figure 1 has been reached.

4.6.3.1 Reliability test cycle. One test cycle (representing the functions necessary to perform one mission) shall be accomplished by performing the test cycle specified in 4.6.1.4.

4.6.3.2 The contractor shall provide replacement parts as required to complete the testing.

4.6.3.3 At the option of the Contractor, the test may be interrupted during or at the conclusion of a test cycle, and the test restarted at the point at which it was interrupted. The restart time shall not exceed 65 hours unless approved by the procuring agency.

4.6.3.4 Complete, accurate records shall be kept for each reliability test, showing each failure and part replacement, including an indication of when each failure occurred. In addition, complete, accurate records shall be kept for all time losses attributable to the drum assemblies, including the time for each failure.

5. PREPARATION FOR DELIVERY

5.1 Pilot pack. The pilot pack shall consist of a complete drum assembly packaged in accordance with Packaging Data Sheet P11689555 or P11689556, as applicable, for the level of protection specified in the contract (see 6.2), packed level C and forwarded in accordance with 3.1.

5.2 Preservation, packaging, packing and marking. The drum shall be preserved, packaged, packed and marked in accordance with Packaging Data Sheet P11689555 or P11689556, as applicable, for the level of protection specified in the contract (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

5.3 Repair parts. Repair parts shall be preserved, packaged, packed and marked in accordance with the Packaging Data Sheet or other requirements for the level of protection specified in the contract (see 6.2).

6. NOTES

6.1 Intended use. The drum is intended for use on, but not limited to the M28A1 Helicopter Armament Subsystem. The drum is used to store M384 high explosive or M385 practice 40mm ammunition in M16 series links and to transfer the ammunition from the drum through a feed chute to the weapon.

6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. List of drawings and specifications pertaining to the drum showing applicable revision dates.
c. Shipping instructions for first article and pilot pack (see 3.1, 4.4 and 5.1).
d. Reliability, environmental conditions, electromagnetic interference (EMI), when required (see 3.5 and 4.6.3, 3.6 and 3.7).
e. Block of serial numbers (see 3.8).
f. Criteria for inspection of component parts and concurrent repair parts (see 4.5.1.1 and 4.5.2.4).
g. Packaging examination and testing, if different (see 4.5.3).
h. List of inspection equipment, responsibilities for acquisition, maintenance, and disposition of, if other than as specified (see 4.5.4.1).
i. Selection of applicable levels of preservation, packaging and packing (see 5.2).
j. Packaging instructions for repair parts (see 5.3).

6.2.2 Contract data requirements. The requirements for records of examination and all tests will be listed directly on a DD Form 1423 incorporated into the contract.

6.2.3 Management control system requirements. When warranted, the contract should specify the application of MIL-Q-9858 or MIL-I-45208 on the Management Control Systems Summary List, DD Form 1660.

6.2.4 Unless otherwise specified (see 6.2.1 h), the contract should specify the application of MIL-I-45607 and MIL-C-45662 on the Management Control Systems Summary List, DD Form 1660.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

6.3 Supersession data. This specification includes the requirements of U.S. Army Weapons Command Purchase Description USAWECOMPD-27, Amendment 2 dated 31 March 1972.


Custodian:
Army - WC

Preparing activity:
Army - WC

Project number:
1010-A064

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

M28A1 SUBSYSTEM:
40MM Ammunition Drum
Decision Risks: 30%
Discrimination Ratio: 1.5:1

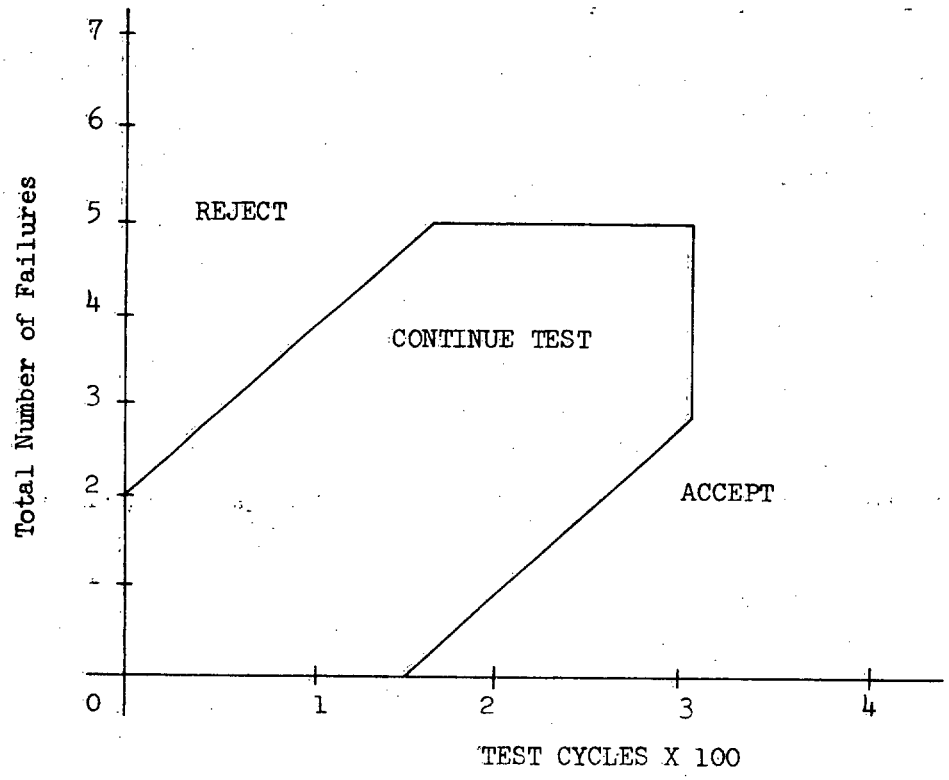

NO. OF FAILURES	REJECT (EQUAL OR LESS)	ACCEPT (EQUAL OR MORE)
0	N/A	143
1	N/A	198
2	N/A	253
3	55	308
4	110	308
5	165	308
6	308	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers, vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-D-45926(WC); Drum, Ammunition, Rotary, 40MM

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Rock Island Arsenal
ATTN: SARRI-LE-S
Rock Island, Illinois 61201

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:16Z
Check the source to verify that this is the current version before use.