A-A-51137A
February 5, 1990
SUPERSEDING
A-A-51137
December 5, 1984

COMMERCIAL ITEM DESCRIPTION

TOOL HOLDERS, BORING TOOL AND BORING BAR, LATHE

The General Services Administration has authorized the use of this commercial item description.

1. SCOPE

1.1 Scope. This description covers tool holders that are designed to hold and support boring tools and boring bars used on metalworking lathes.

1.2 Classification. The tool holders shall be of the following types, styles, and sizes. The type, style, and size tool holders to be furnished shall be as specified (see 6.1).

Type I - Shank mounted.

Style A - Reversible (see table I).
Style B - Clamp block (see table II).
Style C - Split clamp (see table III).

Type II - T-slot mounted.

Style A - Adjustable height (see table IV).
Style B - Fixed height (see table V).

Sizes. The dimensional features of the tool holders shall be in accordance with tables I, II, III, IV, and V as required for the type style, and size specified (see 6.1). The tolerances of all dimensional features shall conform to those identified on the suppliers parts drawings except where a tolerance range is shown in the tables.

AMSC N/A FSC 3460
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

TABLE I. Type I, style A, shank mounted, reversible tool holder.

Tool holder size	Thickness of shank, inches	Height of shank, inches	Length of shank, inches	Diameter of boring tool accommodated inches 1/		Dimensions square bit accommodated inches	
				Min.	Max.	Cross Section	Length
10	3/8	3/4	3-3/8	3/16	1/4	1/4	2-1/2
11	1/2	1	3-3/4	3/16	5/16	5/16	2-1/2
12	5/8	1-1/4	4-3/8	1/4	3/8	3/8	3
13	3/4	1-1/2	4-5/8	5/16	7/16	7/16	3-1/2

1/ See table VI for solid boring tool dimensions.

TABLE II. Type I, style B, shank mounted, clamp block tool holder.

Tool holder size	Thickness of shank, inches	Height of shank, inches	Length of shank, inches	Diameter of boring bar accommodated, inches 1/	
				Min.	Max.
20	3/8	3/4	3-3/4	1/4	5/8
21	1/2	1-1/8	4-5/8	1/4	3/4
22	5/8	1-3/8	5-1/2	3/8	15/16
23	3/4	1-5/8	6-3/8	1/2	1-1/8

1/ See table VII for dimensions of square tool bits.

TABLE III. Type I, style C, shank mounted, split clamp tool holder.

Tool Holder size	Thickness of shank, inches	Height of shank, inches	Length of shank, inches	Diameter boring bar accommodated, inches 1/
29	5/16	3/4	3	1/2
30	3/8	7/8	3-1/8	5/8
31	1/2	1-1/8	3-1/2	3/4
32	5/8	1-3/8	4-1/8	1
33	3/4	1-5/8	4-3/4	1-1/4
34	7/8	1-3/4	5-1/4	1-5/16
35	1	2	6	1-1/2

1/ See table VII for dimensions of boring tools, specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

TABLE IV. TYPE II, style A, T-slot mounted, adjustable height, tool holder.

Tool holder size	Diameter of T-slot flange, inches		Thickness of T-slot flange, inches		Diameter range of boring bar, inches 1/		Span of ring adjustment, inches	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
40	2-15/16	3-1/16	19/32	21/32	1/2	1-15/16	1-7/16	1-15/16
41	3-7/16	3-9/16	23/32	25/32	1/2	1-1/2	1-11/16	2-5/16
42	4-3/16	4-5/16	27/32	29/32	5/8	1-13/16	2-1/16	2-7/8
43	4-15/16	5-1/16	1-1/32	1-3/32	3/4	2-1/4	2-3/8	3-1/4

1/ See table VII for dimensions of boring bars and tool bits.

TABLE V. Type II, style B, T-slot mounted, fixed height, tool holder.

Tool holder size	Diameter of T-slot flange, inches		Thickness of T-slot flange, inches		Width of flange flat, inches		Diameter of boring bars furnished inches 1/		
	Min.	Max.	Min.	Max.	Min.	Max.	Small	Medium	Large
50	1-15/16	2-1/16	11/32	13/32	1-7/32	1-9/32	3/8 2/	1/2	3/4
51	2-7/16	2-5/8	13/32	1/2	1-15/16	2-1/8	1/2	5/8	3/4
52	3	3-1/4	19/32	11/16	2-7/16	2-5/8	1/2	3/4	1-1/4
53	3-7/16	3-5/8	23/32	13/16	2-15/16	3-1/8	5/8	1	1-1/4
54	4-3/16	4-3/8	27/32	15/16	3-7/16	3-5/8	3/4	1-1/4	1-1/2

1/ See table VII ,for dimensions of boring bars and tool bits.
2/ A solid boring tool (S-T-6) shall be furnished for the 3/8" diameter boring bar.

2. APPLICABLE DOCUMENTS

2.1 Documents. The following documents of the issue in effect on the date of invitation for bids or request for proposals form a part of this description to the extent specified herein.

Federal Specification PPP-P-40 - Preservation and Packing of Hand Tools and Tool Accessories for Power Driven, Metal and Woodworking Machinery.

Federal Standard FED-STD-376 - Preferred Metric Units for General Use by the Federal Government.

American Society for Testing and Materials ASTM D 3951 - Standard Practice for Commercial Packaging.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Design. The tool holder shall be new and of the manufacturer's commercial design in effect on the date of the solicitation. The tool holder shall meet the requirements specified herein and conform to current industrial practice.

3.2 Materials and hardness. Type I shank mounted tool holders shall be of drop-forged alloy steel, heat-treated to a Rockwell "C" 40 to 52 hardness or alloy steel, surface hardened to a Rockwell "C" 50 to 55 hardness. The type I style C split clamp tool holder head shall be hardened to a Rockwell "C" 26 to 34 hardness. Type II T-slot mounted tool holders shall be of steel.

3.3 Tool holders. The tool holders covered herein are described as follows.

3.3.1 Type I, style A. The type I, style A , reversible, shank-mounted boring and turning tool holders shall have a tool holding head grooved on top and bottom for supporting cutting tools with a swiveling yoke style clamping device. The shank shall be off-set 45 degrees from the tool holding head. Dimensions of the tool holder shall conform to table I. Two solid boring tools, one square high speed tool steel bit, and a wrench to fit the clamp screw shall be furnished with each tool holder. Unless otherwise specified (see 6.2), the boring tools shall conform to table VI for size specified.

3.3.2 Type I, style B. The type I, style B, clamp block tool holder shall have a reversible clamp block to fasten boring bars to the tool holding head. One boring bar of the maximum size accommodated, a wrench to fit the clamp screws and a wrench to fasten tool bits to the boring bar shall be furnished, unless otherwise specified in the contract or purchase order. Dimensions of the tool holder shall conform to table II.

3.3.3 Type I, style C. The type I, style C, split clamp tool holders shall be furnished with one boring bar of the maximum size within the capacity of the tool holder specified in the contract or purchase order. The boring bar may be a plain bar with two tool bits, a wrench to fit the clamp screw, and a wrench to fit the tool bit fastener device. Unless otherwise specified in the contract or purchase order, dimensions of the tool holders shall conform to table III.

3.3.4 Type II, style A. The type II, style A, adjustable height tool holder shall be furnished with an adjustable ring for height adjustment of boring tools. One boring bar of the maximum size within the capacity of the holder, two tool bits, a wrench to fit the clamp screw, and a wrench to fasten tool bits to the bar shall be furnished with each tool holder unless otherwise specified in the contract or purchase order. Dimensions of the tool holders shall conform to table IV.

3.3.5 Type II, style B. The type II style B, fixed height tool holder shall accommodate three sizes of boring bars and shall be designed so that a slight turn of the clamp screw will secure or release both bar and holder. Unless otherwise specified in the contract or purchase order, three bars of appropriate size shall be furnished with each holder. A wrench to fit the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

clamp screw and a wrench to fasten tool bits to boring bars or a combination wrench to fit both the clamp screw and tool bit fastener device shall be furnished with each tool holder. Unless otherwise specified (see 6.2), The dimensions of the tool holders shall conform to table V.

3.4 Boring bars.

3.4.1 S-T series. Solid forged bars with tool numbers and dimensions conforming to table VI.

3.4.2 P-B series. Plain bars having tool bit channels of 90 degrees and 45 degrees at opposite ends of the bar with tool numbers and dimensions conforming to table VII.

TABLE VI. Solid boring tools for type I, style A tool holders.

Boring tool number	Diameter of boring tool, (inches)	Length of boring tool, (inches)	Width of cutting face (inches)	Applicable tool holder number see table I
S-T-1	3/16	4	5/16	10
S-T-2	1/4	5	17/32	
S-T-3	3/16	4-1/2	7/16	11
S-T-4	5/16	6	5/8	
S-T-5	1/4	5	17/32	12
S-T-6	3/8	7	3/4	
S-T-7	5/16	6	5/8	13
S-T-8	7/16	8	7/8	

TABLE VII. Plain boring bars.

Number of plain bar	Diameter of boring bar, inches	Length of boring bar, inches	Square tool bit		
			Cross section, inches	Length, inches	
				Straight 90 degree	Angular 45 degree
P-B-1	1/2	8	3/16	1	2
P-B-3	5/8	9	3/16	1	2
P-B-4	3/4	11	1/4	1-7/32	2-1/2
P-B-5	1	13	5/16	1-7/16	2-1/2
P-B-6	1-1/4	18	3/8	1-13/16	3
P-B-10	1-1/2	23	1/2	2-1/2	4
P-B-12	1-3/4	28	5/8	3-1/4	4-1/2
P-B-13	2-1/4	34	5/8	3-1/4	4-1/2
P-B-14	2-1/4	31	3/4	4-3/4	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

3.5 Measurement system. All dimensions in this description are given in US units. These dimensions may be converted to SI units through the use of conversion factors and methods specified in FED-STD-376.

3.6 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

3.7 Workmanship. Workmanship of the tool holders shall be of a quality equal to that of comparable products furnished to the commercial market.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this description shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this description shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling, inspection, as part of manufacturing operations, is an acceptance practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Sampling inspection. As a minimum sampling inspection, the supplier shall randomly select the number of samples in table VIII that is applicable to the quantity of items being purchased. Each sample item shall be inspected to determine conformance with the examination in 4.3 and the dimensional inspection in 4.4. Should any of the samples fail to meet either the examination or inspection below, the entire lot shall be considered defective and unsuitable for acceptance. A lot is defined as all items of the same type, style and size presented at one time for acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

TABLE VIII. Sampling plan.

Quantity of items being purchased	Sample size	Quantity of items being purchased	Sample size
2 to 8	2	91 to 150	20
9 to 15	3	151 to 280	32
16 to 25	5	281 to 500	50
26 to 50	8	501 to 1200	80
51 to 90	13		

4.3 Examination. Each tool holder submitted for sample inspection shall be visually examined to determine conformance with all requirements of this description except for the hardness tests.

4.4 Dimensional inspection. Each tool holder submitted for sample inspection shall be inspected to assure conformance with all dimensional and tolerance requirements specified herein.

4.5 Hardness test. After the sample inspection has been completed. A hardness test shall be performed on 10 percent of the sample tool holders. If any of the test samples fail to meet the applicable hardness specified herein, the total lot from which the samples were selected shall be rejected.

4.6 Packaging inspection. Packaging shall be inspected for conformance with section 5.

5. PACKAGING

5.1 Preservation, packing, and marking. Unless otherwise specified in the contract or purchase order preservation, packing, and marking shall be in accordance with ASTM D 3951. When specified (see 6.1) preservation, packing, and marking shall be in accordance with PPP-P-40, level as specified.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Title, number, and date of this commercial item description.

b. Type, style, size, and quantity required (see 1.2).

c. Packaging in accordance with PPP-P-40 if required; specify level (see 5.1).

d. Dimensions of tool holder, if different (see 3.3.1, 3.3.5).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

6.2 Cross reference data Cross reference between this CID and preceding documents is as follows:

A-A-51137	A-A-51137A	A-A-51137	A-A-51137A
Type I	Type I	G-M-29	29
Style A	Style A	G-M-30	30
Style B	Style B	G-M-31	31
Style C	Style C	G-M-32	32
Type II	Type II	G-M-33	33
Style A	Style A	G-M-34	34
Style B	Style B	G-M-35	35
Tool holder number	Tool holder size	G-L-40	40
		G-L-41	41
		G-L-42	42
G-S-10	10	G-L-43	43
G-S-11	11		
G-S-12	12	G-L-50	50
G-S-13	13	G-L-51	51
		G-L-52	52
G-M-20	20		
G-M-21	21	G-L-53	53
G-M-22	22	G-L-54	54
G-M-23	23		

6.3 CID based identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. Where applicable Arabic numbers shall be substituted for Roman numerals.

A51137 X X XX

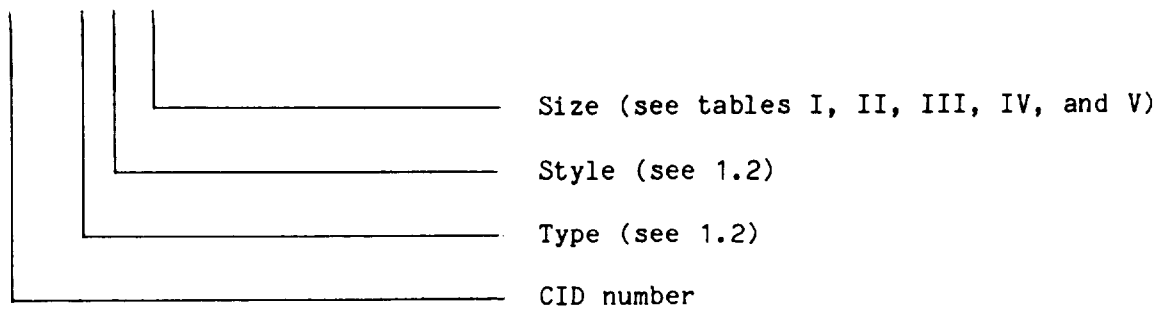

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodian

Army - AL
Air Force - 99

Review Activities

Air Force - 84
DLA - GS

CIVIL AGENCY COORDINATION ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:
DLA - IP

Project 3460-0141

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE *(YYMMDD)*
3. DOCUMENT TITLE		
4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*		
5. REASON FOR RECOMMENDATION		

6. SUBMITTER		
a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY	
a. NAME	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON
c. ADDRESS *(Include Zip Code)*	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.