MILITARY SPECIFICATION SHEET

SWITCHES, MULTISTATION PUSH BUTTON (ILLUMINATED MATRIX ARRANGEMENT)
RFI SHIELDED, MOISTURE SEALED, HIGH IMPACT SHOCK, STYLE SM08

This amendment forms a part of MIL-S-24317/8B(EC) dated 21 May 1990, and is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 1

* TITLE Delete and substitute as printed above

PAGE 2

* Figure 2, front view, delete and substitute

"

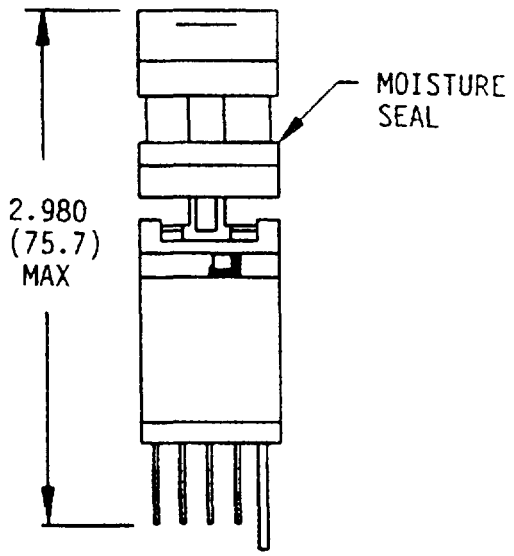

"

PAGE 4

REQUIREMENTS EMI/RFI shielding, delete and substitute

"EMI/RFI shielding Grounded lens screen shall be provided Screen to mounting surface resistance shall not exceed 3 ohms EMI screen is not grounded during switch travel or in the depressed position "

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:21Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

CONCLUDING MATERIAL

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-N726)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:21Z
Check the source to verify that this is the current version before use.