[INCH-POUND]
A-A-59345
23 February 2000
SUPERSEDING
MIL-G-23368D
25 May 1989

COMMERCIAL ITEM DESCRIPTION

GRINDING MACHINE, CYLINDRICAL, EXTERNAL, PLAIN

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers plain, external, cylindrical grinding machines. The machines covered by this CID are intended for use in shops where precision grinding to uniform tolerances for size, roundness, and finish on a wide variety of materials is required.

2. CLASSIFICATION. The grinding machines shall be of the following swings and sizes. The swing and size to be furnished shall be as specified (see 7.2(b)).

Swing - See table I
Size - See table I

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

TABLE I. Machine swings and sizes.

Swing, inches	Size – center-to-center distance, inches															
	12	16	18	20	24	36	40	48	57	60	72	80	96	120	160	315
4			X													
5	X															
12		X		X	X		X			X						
14				X		X	X			X						
16	X			X		X			X							
20						X	X	X				X		X		X
24										X	X					
25												X		X	X	
30													X			

Note: "X" denotes availability.

3. SALIENT CHARACTERISTICS

3.1 General requirements. The machine shall be new and one of the manufacturer's current models capable of operation in accordance with the requirements herein. All parts subject to wear, breakage, or distortion shall be accessible for adjustment, replacement, and repair.

3.1.1 Identification of axes. The grinding machine shall be provided with X- and Z-axes of linear motion. Table swivel shall rotate on the B'-axis when provided. Crossfeed swivel shall rotate on the B-axis when provided. Identification of the axes of motion shall be in accordance with American National Standards Institute/Electronic Industries Association (ANSI/EIA) 267-C.

3.2 Components. The grinding machine shall include, as a minimum, the following components:

3.2.1 Base. The base shall support the other elements of the machine and shall incorporate materials, shape, and mass to minimize adverse vibration and deflection. The base shall provide a means for leveling and anchoring the machine. The base shall be of sufficient area and design to ensure that the center of gravity of the worktable and wheelhead cannot extend beyond the periphery of the base.

3.2.2 Machineways. Unless otherwise specified (see 7.2(c)), machineways shall be of the design considered by the manufacturer as standard for the machine. All machineways shall have a protective means to keep swarf and other debris from bearing surfaces.

3.2.3 Worktable. Unless otherwise specified (see 7.2(d)), the machine shall have a worktable with a means of mounting the workhead and tailstock and adjusting and locking their longitudinal position. Unless otherwise specified (see 7.2(e)), power traverse with a means for manual control shall be provided. A means shall be provided to prevent table overtravel. Worktable traverse (Z-axis) shall meet the requirements shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

TABLE II. Table traverse requirements.

Parameter	Swing, inches		
	4, 5	12	14–30
Maximum table movement necessary at automatic reversal, inch	0.07	0.1	0.5
Minimum range, traverse rate (grinding), inches/minute	3–280	3–240	3–120
Minimum range, dwell adjustment, seconds	0–5	0–5	0–15
Slow hand traverse, maximum inch/revolution	0.01	0.2	0.2
Rapid hand traverse, minimum inch/revolution	1	1	1

3.2.4 Swivel table. When required, a swivel table shall be provided for mounting the workhead and tailstock and have an angular range of swivel as specified (see 7.2(f)). The swivel table shall be provided with a locking means to provide a stable platform for grinding tapers or offset contours.

3.2.5 Wheelhead slide table. Unless otherwise specified (see 7.2(g)), the wheelhead slide table shall be provided with manual and automatic infeed (X-axis) as required by the grinding wheel. Unless otherwise specified (see 7.2(h)), the wheelhead slide table X-axis shall be perpendicular to the longitudinal traverse (Z-axis). If angular crossfeed is required, the X-axis shall be offset from perpendicular by either 30 or 45 degrees, or mounted on an infinitely variable swivel as specified (see 7.2(i)). Infeed requirements for the wheelhead slide table (grinding wheel) are shown in table III.

TABLE III. Requirements for wheelhead slide table infeed.

Parameter	Requirement
Minimum range of automatic infeed at reversal, inch	0.0001–0.0025
Maximum infeed per smallest increment, inch	0.000015
Maximum movement of slide table per revolution of handwheel, inch	0.05

3.2.6 Workhead. The workhead shall be configured for dead- or live-center grinding as specified (see 7.2(j)). The workhead shall be provided with an internal taper to accommodate replaceable workpiece centers. The workhead spindle shall be mounted on antifriction or low-friction bearings that are automatically lubricated or sealed for life and designed to minimize axial and radial runout.

3.2.6.1 Dead-center. When dead-center grinding is provided, the workhead shall have a drive plate (complete with drive pin) that revolves around the workpiece center. Unless otherwise specified (see 7.2(k)), the taper provided shall be that considered by the manufacturer as standard. The bearings for the drive plate shall be protected from intrusion of grinding swarf or other

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

foreign materials, automatically lubricated or sealed for life, and designed to minimize generation or transmission of vibration to the workpiece.

3.2.6.2 Live-center. When live-center grinding is provided, the workhead spindle shall have an internal taper designed for use with replaceable centers, collets, or chucks. Unless otherwise specified (see 7.2(l)), the taper provided shall be that considered by the manufacturer as standard.

3.2.7 Tailstock. The tailstock shall be constructed with a spring-loaded spindle that can retract and extend. A handwheel, lever, or other means shall be provided for adjusting spindle extension. The spring tension shall be adjustable to ensure the proper center pressure for the weight and size of the workpiece. The spindle shall have an internal taper identical in type and size to the workhead spindle. All moving parts shall be shielded from grinding swarf and other debris.

3.2.8 Wheelhead assembly. The wheelhead assembly shall mount on the wheelhead slide table with its grinding wheel spindle horizontal and perpendicular to the X-axis. As a minimum, the wheelhead assembly shall consist of the following:

a. A supporting frame.
b. A grinding wheel spindle and spindle drive.
c. A protective housing for the wheelhead assembly.
d. Grinding wheels(s) and appropriate safety cover.

3.2.9 Grinding wheel spindle. The grinding wheel spindle shall be supported and held in axial and radial alignment by precision antifriction or lowfriction bearings, and dynamically balanced to provide vibration-free operation at all spindle speeds. Continuous or permanent lubrication of the bearings shall be provided. Unless otherwise specified (see 7.2(m)), the spindle drive, horsepower, and speed shall be that considered by the manufacturer as standard for the grinding wheel(s) provided.

3.2.10 Grinding wheel(s). Unless otherwise specified (see 7.2(n)), the grinding wheel type(s) and size(s) shall be that considered by the manufacturer as standard. The minimum grinding wheel width shall be as specified (see 7.2(o)). The wheel(s) shall be marked in accordance with ANSI B74.13, and meet the safety requirements established in ANSI B7.1.

3.2.11 Grinding wheel dresser. Unless otherwise specified (see 7.2(p)), a grinding wheel dresser with at least a one-carat diamond shall be provided to true the face of the grinding wheel. The dresser shall be capable of truing the grinding wheel to its full usable depth. Dressing shall not require removal of the workpiece.

3.2.12 Dials, scales, and indicating devices. Unless otherwise specified (see 7.2(q)), all dials and indicating devices used to indicate linear machine axis position or movement shall be graduated in increments not greater than 0.0001 inch. Unless otherwise specified (see 7.2(r)), slide scales used for indicating rotary position shall be graduated in increments not greater than 1 degree and include a vernier for indicating increments not greater than 0.1 degree. When handwheel dials are provided to trim angular position, they shall be graduated in increments not greater than 0.01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

degree. Dial and handwheel circumjacent scales shall be permanently and legibly engraved or etched on a nonglare background. All feed dials shall have independent zero adjustment and be calibrated contiguously over the full range of movement.

3.2.12.1 Digital readout. When specified (see 7.2(s)), a digital readout system shall be provided. The system shall consist of an electronic display, related components, and any equipment necessary to provide a readily visible digital readout over the full working range. The digital readout shall be capable of indicating in both US and SI systems of measurement. Unless otherwise specified (see 7.2(t)), the digital readout system shall meet the requirements shown in table IV.

TABLE IV. Digital readout system requirements.

Parameter	Requirement
Resolution	0.00001 inch
Accuracy	±0.00005 inch
Repeatability	±0.00005 inch

3.2.13 Controls. All operating controls shall be located convenient to the operator's position. Control enclosures shall meet the requirements of National Electrical Manufacturers Association (NEMA) ICS 6. Unless otherwise specified (see 7.2(u)), operating controls shall provide for manual infeed, automatic infeed, and automatic cycle operating modes.

3.2.13.1 Manual infeed. A handwheel or other manually operated device shall be furnished for feeding the grinding wheel into the workpiece. The hand infeed shall have a coarse and fine infeed with a graduated indicator/dial.

3.2.13.2 Automatic infeed. Automatic infeed of the grinding wheel shall be provided for traverse grinding operations. Controls shall be provided for selective infeed increments at desired reversal(s) and for limitation of total infeed. Unless otherwise specified (see 7.2(v)), the infeed mechanism shall be actuated at each or alternate reversal of the longitudinal tables movement at the choice of the operator.

3.2.13.3 Automatic cycle. Unless otherwise specified (see 7.2(w)), the grinding machine shall have an automatic cycle for plunge and traverse grinding. After setup for an automatic cycle, the operator shall only be required to load the workpiece, start the cycle by a single control, and unload the workpiece. The automatic cycle shall include, as a minimum, the following functions:

a. Plunge grinding.

    1. Wheel advances at fast feed.
    2. Workhead rotation and coolant flow or dust extraction begins.
    3. Fast feed reduces as wheel nears workpiece.
    4. Coarse feed engages (rate shall be adjustable or preprogrammed).
    5. Fine feed engages as workpiece nears finished size (rate shall be adjustable or preprogrammed).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

6. Preset positive stop for crossfeed starts the automatic sparkout timing mechanism.
7. Wheel retracts rapidly, feed mechanism is reset to original position, workhead rotation stops, and coolant flow or dust extraction stops.

b. Traverse grinding.

1. Grinding wheel is manually positioned.
2. Power table traverse is actuated; workhead rotation and coolant flow or dust extraction begins.
3. Preselected infeed is engaged, wheel feeds at each or alternate table reversal as selected.
4. Preset positive stop for crossfeed starts the automatic sparkout timing mechanism.
5. Power table traverse stops, workhead rotation stops, coolant flow or dust extraction stops, wheel retracts, feed mechanism is reset to original position.

3.2.14 Lubrication system. Unless otherwise specified (see 7.2(x)), the grinding machine shall be equipped with an automatic lubricating system to direct oil flow from the reservoir to all machine components requiring continuous lubrication. A means shall be provided for determining oil level in the reservoir. The automatic lubricating system shall include a cleanable or replaceable filter. Upon loss of pressure in the automatic lubrication system, the grinding machine shall automatically stop. Machine parts requiring periodic manual lubrication shall be readily accessible through doors or removable panels.

3.2.15 Coolant system. Unless otherwise specified (see 7.2(y)), the grinding wheel shall be a flood cooled. As a minimum, the coolant system shall consist of a reservoir, pump, strainer, and all necessary piping. The system shall be equipped with a method to control the rate of coolant flow to the grinding area. When specified (see 7.2(z)), an optional filtration system shall be provided.

3.2.16 Dust extractor system. When specified (see 7.2(aa)), a dust extractor system and all necessary connections shall be provided for dry grinding. The dust extractor system shall be interlocked with the coolant system to allow individual operation of the selected system and prevent simultaneous operation of both systems.

3.2.17 Hydraulic system. If a hydraulic system is provided, it shall conform to the requirements of National Fluid Power Association (NFPA) T2.24.1. The hydraulic system shall be complete and include all pumps, valves, piping, cylinders and controls. Means shall be provided to prevent damage to the components from overpressure. A filter system shall be provided to ensure delivery of clean fluid. The hydraulic reservoir shall have means for determining fluid level.

3.2.18 Electrical system. Unless otherwise specified (see 7.2(bb)), the electrical system shall conform to the National Fire Protection Association (ANSI/NFPA) 79. The machine shall have dual 230/460-volt, 3-phase, 60-hertz circuit capability and shall be wired for the voltage specified (see 7.2(cc)). Unless otherwise specified (see 7.2(dd)) the control system power shall be provided by a separate 120-volt, single-phase, 60-hertz circuit from the machine main power supply.

3.2.19 Electrical motors. The grinding machines drive motor(s) shall be rated for continuous duty cycle, shall have sealed and permanently lubricated ball or roller bearings, shall be energy efficient, and shall conform to NEMA MG-1. Unless otherwise specified (see 7.2(ee)), the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

motors shall have open dripproof enclosures. Motor controls shall conform to NEMA ICS-1 and ICS-3.

3.2.20 Optional accessories. Optional accessories shall be furnished as specified (see 7.2(ff)).

3.3 Performance. Unless otherwise specified (see 7.2(gg)), the grinding machine shall meet the alignment and performance requirements shown in tables V and VI, respectively, when tested in accordance with sections 5.3 through 5.3.5.

TABLE V. Alignment requirements.

Parameter	Requirement
Table straight in horizontal direction	±0.0002 inch/foot
Table flat or level	
Machineways parallel and straight	±0.0001 inch/foot
Axis of workhead/tailstock spindle parallel with table and collinear with each other	±0.0005 inch/foot
Taper of workhead/tailstock spindle true running	0.0005 inch TIR[1]
Grinding wheel spindle, axial and radial runout	0.0002 inch TIR

[1] TIR is total indicator reading.

TABLE VI. Performance requirements.

Parameter	Diameter of workpiece, inches		
	Up to 3	3–8	Over 8
Diameter, maximum deviation, inch	±0.0001	±0.0002	±0.0003
Roundness, maximum deviation, inch	±0.00005	±0.0001	±0.00015
Cylindrical taper, maximum deviation, inch/foot TIR	0.0001		
Maximum axial runout of ground shoulder, inch TIR	0.0001		
Finish roughness (total), microinches Rt[1]	5		

[1] Rt is roughness total as defined in American Society of Mechanical Engineers (ASME) B46.1.

3.4 Machine dimensions and weight. If required, the maximum machine dimensions (length, width, and height) and machine weight shall not exceed the restrictions specified (see 7.2(hh)).

3.5 Safety and health requirements. The manufacturer shall ensure that the machine and all equipment and accessories used on the machine shall be in compliance with ANSI B11.9 and Occupational Safety and Health Administration (OSHA) 29 CFR PART 1910. If a conflict arises between the ANSI and OSHA standards, the OSHA standards shall apply.

3.6 System of units. The U. S. Customary System of Units (US) or the International System of Units (SI) shall be used to graduate measuring and indicating devices. When only one system of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

graduation is acceptable, the particular graduation required shall be as specified (see 7.2(ii)). Regardless of the measurement system used, all measuring and indicating devices on the machine shall be graduated in the same system. When specified (see 7.2(jj)), measuring and indicating devices shall be graduated in both the US and SI system of measurements.

3.7 Nameplate. A nameplate shall be securely attached to the machine. Unless otherwise specified (see 7.2(kk)), the nameplate shall contain the following information:

a. Nomenclature.
b. Manufacturer's name.
c. Serial number.
d. Machine model designation.
e. Power input (volts, total amperes, phase, frequency).
f. Short-circuit/over-current rating.
g. Contract number or order number.
h. National stock number.
i. Date of manufacture.

3.8 Lubrication plate or chart. When specified (see 7.2(ll)), a lubrication plate or chart shall be attached to the machine. The information provided on the plate or chart shall include:

a. Points of lubricant application.
b. Servicing interval.
c. Type of lubricant(s) with SAE number or lubricant identifier.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Environmental protection. The item shall meet all applicable Environmental Protection Agency (EPA) restrictions in effect on the date of the contract. These regulations apply to the emission of materials hazardous to the environment or the user's health and shall be adhered to during the manufacturing, service, transportation, storage, and operation/use of the item.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products shall meet the salient characteristics of this commercial item description; conform to the manufacturer's own drawings, specifications, standards, and quality assurance practices; and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

5.2 Inspection. The grinding machine shall be inspected to determine compliance with all requirements specified in this CID.

5.3 Testing. Unless otherwise specified (see 7.2(mm)), the grinding machine shall be tested in accordance with sections 5.3.1 through 5.3.5.

5.3.1 Test setup and conditions. Unless otherwise specified (see 7.2(nn)), the manufacturer shall be responsible for supplying all tooling and material(s) and shall conduct all tests required by the Government. The manufacturer shall provide test instruments and equipment with calibration traceable to National Institute of Standards and Technology (NIST) and shall provide certification of calibration as specified (see 7.2(oo)). Unless otherwise specified (see 7.2(pp)), the machine shall be tested at an indoor facility with the temperature between 40 and 110 degrees Fahrenheit and the relative humidity between 20 and 95 percent, noncondensing.

5.3.2 Operational test. The grinding machine shall be operated in accordance with the manufacturer's standard operating procedures. The grinding machine shall be operated at a no-load condition for not less than 2 hours. Proper operation of all controls and features shall be verified during the trial period.

5.3.3 Alignment tests. Alignment shall be verified before and after the performance tests and shall meet the requirements shown in table V. Changes in alignment shall be cause for rejection.

5.3.4 Performance test. Unless otherwise specified (see 7.2(qq)), the performance test shall consist of grinding a 12-inch long cylinder with a diameter at least half the swing diameter of the machine under test. The test cylinder shall be ground by removing at least 0.05 inch of material by traverse grinding to produce a cylinder representative of machine performance. When angular infeed is provided, the test shall include plunge grinding a shoulder on the test cylinder at the tailstock end that is at least 10 percent less in diameter and equal to the width of the grinding wheel. The test shall be conducted in accordance with the manufacturer's standard operating procedure. The grinding wheel may be shaped, dressed, or changed during the test at the manufacturer's option. The test results will be compared to the performance requirements shown in table VI.

5.3.5 Optional tests. Optional tests shall be conducted as specified (see 7.2(rr)).

5.4 Acceptance. Unless otherwise specified (see 7.2(ss)), preliminary and final acceptance tests shall be conducted at the manufacturer's site. The results of the operational, alignment, and performance tests shall be compared to the requirements listed in this CID and shown in tables II through VI. Failure of the machine to meet the requirements shall be cause for rejection.

6. PACKAGING. Preservation, packing, and marking shall be as specified (see 7.2(tt)).

7. NOTES

7.1.1 Government documents. Copies of Federal documents may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

7.1.2 Industry standards. Copies of industry standards referenced in this CID may be obtained from the following addresses:

American National Standards Institute (ANSI)

ANSI B7.1	Safety Requirements for the Use, Care and Protection of Abrasive Wheels
ANSI B11.9	Safety Requirements for the Construction, Care, and Use of Grinding Machines
ANSI B74.13	Markings for Identifying Grinding Wheels and Other Bonded Abrasives

Applications for copies should be sent to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

American Society of Mechanical Engineers (ASME)

ASME B46.1	Classification and Designation of Surface Qualities

Applications for copies should be sent to the American Society of Mechanical Engineers, East 47th Street, New York, NY 10017.

National Electrical Manufacturers Association (NEMA)

NEMA MG-1	Motors and Generators
NEMA ICS-1	Industrial Control and Systems General Requirements
NEMA ICS-3	Industrial Control and Systems Factory Built Assemblies
NEMA ICS-6	Industrial Control and Systems Enclosures

Applications for copies should be sent to the National Electrical Manufacturers Association1300 North 17th Street, Suite 1847, Rosslyn, VA 22209.

National Fire Protection Association (NFPA)

ANSI/NFPA-79	Electrical Standards for Industrial Machinery
ANSI/NFPA-T2.24.1	Hydraulic Fluid Power – Systems Standard for Stationary Industrial Machinery

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

Applications for copies should be sent to the National Fire Protection Association, One Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

Occupational Safety and Health Association (OSHA)

OSHA 29 CFR PART 1910 Occupational Safety and Health Standards for Industry

Applications for copies should be sent to the U. S. Department of Labor, 200 Avenue NW, Room 423, Washington DC 20210.

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Swing and size required (see 2).
c. Machineways, if different (see 3.2.2).
d. Worktable, if different (see 3.2.3).
e. Worktable traverse, if different (see 3.2.3).
f. Swivel table, as specified (see 3.2.4).
g. Wheelhead slide table infeed, if different (see 3.2.5).
h. Wheelhead slide table X-axis, if different (see 3.2.5).
i. Wheelhead slide table angular crossfeed, as specified (see 3.2.5).
j. Workhead, dead- or live-center, as specified (see 3.2.6).
k. Dead-center taper, if different (see 3.2.6.1).
l. Live-center taper, if different (see 3.2.6.2).
m. Grinding wheel spindle drive, horsepower, and speed, if different (see 3.2.9).
n. Grinding wheel type(s) and size(s), if different (see 3.2.10).
o. Grinding wheel width, as specified (see 3.2.10).
p. Grinding wheel dresser, if different (see 3.2.11).
q. Dial graduation, if different (see 3.2.12).
r. Slide scale graduation, if different (see 3.2.12).
s. Digital readout, if required (see 3.2.12.1).
t. Digital readout requirements, if different (see 3.2.12.1).
u. Controls, if different (see 3.2.13).
v. Automatic infeed, if different (see 3.2.13.2).
w. Automatic cycle, if different (see 3.2.13.3).
x. Lubrication system, if different (see 3.2.14).
y. Coolant system, if different (see 3.2.15).
z. Filtration system, if required (see 3.2.15).
aa. Dust extractor, if required (see 3.2.16).
bb. Electrical system industrial standard, if different (see 3.2.18).
cc. Electrical system voltage, as specified (see 3.2.18).
dd. Control system voltage, if different (3.2.18).
ee. Motor enclosure, if different (see 3.2.19).
ff. Optional accessories, as specified (see 3.2.20).
gg. Performance requirements, if different (see 3.3).
hh. Machine dimensions and weight, as specified (see 3.4).
ii. System of units required (see 3.6).
jj. Dual system of units, if required (see 3.6).
kk. Nameplate, if different (see 3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

ll. Lubrication plate or chart, if required (see 3.8).
mm. Testing, if different (see 5.3).
nn. Test responsibility, if different (see 5.3.1).
oo. Certification of calibration, as specified (see 5.3.1).
pp. Test environmental conditions, if different (see 5.3.1).
qq. Performance test, if different (see 5.3.4).
rr. Optional tests, as specified (see 5.3.5).
ss. Acceptance, if different (see 5.4).
tt. Packaging requirements, as specified (see 6).

7.3 Part identification number (PIN). The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

AA59345-XXXXX

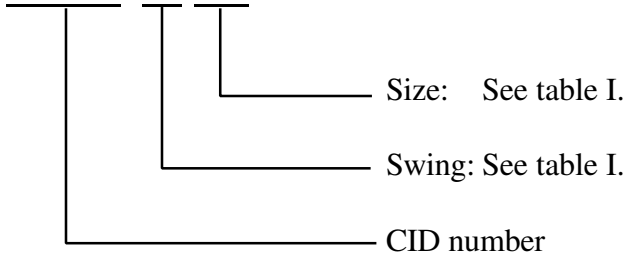

MILITARY INTERESTS:

Custodians
Air Force - 99
Navy - SH

Reviewers
Air Force - 84
Navy - AS, OS

PREPARING ACTIVITY
DLA - GS

(Project 3415-0247)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.