[INCH-POUND]
A-A-59349
9 October 1998
SUPERSEDING
MIL-R-779E
21 November 1990

COMMERCIAL ITEM DESCRIPTION

REFLECTORS, LIGHT; WITH HOLDER

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers light reflectors with holders for indoor or outdoor installations. The light reflectors covered by this CID are intended for use in shielding and enhancing the illumination of incandescent drop lights, side lights, wall lights, and platform lights.

2. CLASSIFICATION. The light reflectors shall be of the following types and sizes. Type is determined by the reflector shape. Size is determined by the width of the reflector opening at its widest point (generally the diameter). The type and size to be furnished shall be as specified (see 7.2(b)).

Type I - Cone Type II - Dome
Type III - Angle
Type IV - Parabola

Size 1 - 6 inches
Size 2 - 8 inches
Size 3 - 10 inches
Size 4 - 12 inches
Size 5 - 14 inches
Size 6 - 16 inches
Size 7 - 18 inches
Size 8 - 20 inches

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC
6210
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 General requirements. The light reflector shall be capable of attachment to an indoor or outdoor light fixture. The reflector shall cover and direct the light beam of the fixture. Unless otherwise specified (see 7.2(c)), the reflector shall be capable of accommodating and withstanding the heat from a 100-watt lamp. When specified (see 7.2(d)), the reflector shall be tapped for mounting on 0.5-inch conduit. Dissimilar metals shall be insulated from each other.

3.2 Components. The light reflector shall include, as a minimum, the following components:

3.2.1 Reflector body. Unless otherwise specified (see 7.2(e)), the reflector body shall be made of aluminum. The reflector shall be free of sharp edges. The metal shall be of uniform thickness and of sufficient thickness to produce a rigid construction. Unless otherwise specified (see 7.2(f)), the open end of the reflector shall be circular. For type I light reflectors, the angle between the reflector surface and the centerline of the cone shall be 45 or 80 degrees as specified (see 7.2(g)). Unless otherwise specified (see 7.2(h)), the outside of the reflector body shall be green. Unless otherwise specified (see 7.2(i)), the outside surface of the reflector body shall be covered by fused porcelain enamel. When specified (see 7.2(j)), the reflector body shall be vented.

3.2.2 Reflector holder. The light reflector shall be furnished with a holder of a clamp type, a pendant hood, or an equally adequate means of securing the reflector to the light fixture as specified (see 7.2(k)). If a pendant hood is furnished, it shall contain a mogul- or medium-based lamp receptacle as specified (see 7.2(l)).

3.2.3 Lampholder. If required (see 7.2(m)), the light reflector shall include a rigid or shock-absorbing lampholder. The lampholder shall conform to Underwriters Laboratory (UL) 496.

3.2.4 Power cord. If required (see 7.2(n)), the light reflector shall include a 6-foot , 3-conductor, SJ-type electrical cord meeting the requirements of UL 62.

3.2.5 Optional components. Optional components shall be furnished as specified (see 7.2(o)).

3.3 Performance. The inner (reflecting) surface of the reflector shall have a reflection factor of not less than 70 percent, measured in accordance with Society of Automotive Engineers (SAE) J964. Unless otherwise specified (see 7.2(p)), the reflector shall be capable of rotating around the lamp receptacle to which it is secured.

4. REGULATORY REQUIREMENT

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The light reflector shall meet the salient characteristics of this commercial item description; conform to the manufacturer’s own drawings, specifications,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

standards, and quality assurance practices; and be the same light reflector offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.1.1 Verification of conformance. Suitable verification of conformance to SAE-J964, UL-62, and UL-496 shall be by either the SAE or UL label or certification of such conformance by an accredited testing laboratory satisfactory to the Government.

5.2 Warranty. Unless otherwise specified (see 7.2(q)), the manufacturer's standard commercial warranty, terms, and conditions shall apply.

6. PACKAGING. Preservation, packing, and marking shall be as specified (see 7.2(r)) in the contract or purchase order.

7. NOTES

7.1 Referenced documents.

7.1.1 Government documents. Copies of Federal documents may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.2 Industry standards. Copies of industry standards referenced in this CID may be obtained from the following addresses:

Society of Automotive Engineers (SAE)

SAE-J964 Test Procedure for Determining Reflectivity of Rear View Mirrors

Applications for copies should be sent to: Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.

Underwriters Laboratories Inc. (UL)

ANSI/UL-496 Edison-Base Lampholders
ANSI/UL-62 Flexible Cord and Fixture

Applications for copies should be sent to: Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062.

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type and size of light reflector required (see 2).
c. Lamp wattage capacity, if different (see 3.1).
d. Tapped for 0.5-inch conduit mounting, if required (see 3.1).
e. Composition of reflector body, if different (see 3.2.1).
f. Shape of reflector opening, if different (see 3.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

g. Angle between reflector surface and centerline, specify if type I (see 3.2.1).
h. Color of outside surface of reflector body, if different (see 3.2.1).
i. Type of paint/enamel, if different (see 3.2.1).
j. Vented reflector body, if required (see 3.2.1).
k. Type of reflector holder required (see 3.2.2).
l. Type of lamp receptacle, if required (see 3.2.2).
m. Type of lampholder, as specified (see 3.2.3).
n. Power cord, as specified (see 3.2.4).
o. Optional components, as specified (see 3.2.5).
p. Performance, if different (see 3.3).
q. Warranty, if different (see 5.2).
r. Packaging requirements, as specified (see 6).

7.3 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

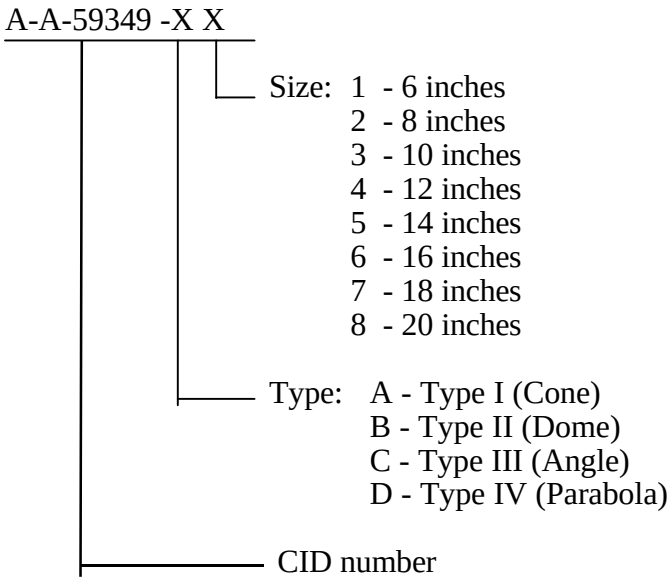

MILITARY INTERESTS:

Custodian
Navy - MC

PREPARING ACTIVITY
DLA - GS

(Project 6210-1065)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.