INCH-POUND

A-A-59359
01 February 1999

COMMERCIAL ITEM DESCRIPTION

FUEL SPILL CONTROL KIT

The General Services Administration has authorized the use of this Commercial Item Description for all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers the material, tools, and personal protective gear required for the fuel spill control kit. The fuel spill control kit is intended to contain and remove fuel spills and limit surface and ground water contamination.

1.1 Classification. Fuel spill control kits shall be classified (see 6.1) as follows:

Type I - Contains quantities required for use with hoseline outfit, fuel handling, 4-inch.

Type II - Contains quantities required for use with the fuel system supply point.

2. SALIENT CHARACTERISTICS

2.1 Materials. The contractor shall select the materials not identified herein, but the materials shall be capable of meeting all of the operational and environmental requirements specified herein. The materials shall not present any safety hazards to operating and maintenance personnel when used for its intended purpose.

2.1.1 Deterioration prevention and control. The kit shall be fabricated from compatible materials, inherently corrosion or deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration to which the materials are susceptible.

2.1.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact without suitable protection to prevent galvanic corrosion.

2.2 Kit components. The fuel spill control kit shall contain the components listed and the quantity specified in table I.

Beneficial comments, recommendations, additions, deletions and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-D/210, Warren, MI 48397-5000.

AMSC N/A FSC 3835

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

TABLE I. Fuel spill control kit components.

Item	Description	Quantity type I	Quantity type II
1	Sorbent Oil (pad)	30	60
2	Sorbent Oil (particulate, bag)	3	3
3	Sorbent Oil (enclosed, boom type)	6	12
4	Sorbent Oil (enclosed, pillow type)	24	48
5	Bag, disposal, hazardous material	12	24
6	Drum, 55-gallon	1	2
7	Gloves, size 9	2	2
8	Gloves, size 11	2	2
9	Goggles	2	2
10	Pail, 5-gallon	4	4
11	Pan, drip	24	48
12	Tie, strip, bag	24	48
13	Plate, caution	1	2
14	Shovel, hand, 2-piece	2	2

2.3 Performance.

2.3.1 Sorbent (pad). The sorbent shall be the non-reusable pad type in accordance with A-A-1280, type III, class 2. Pads shall be 16.00 to 17.00 inches wide and 19.00 to 20.00 inches long.

2.3.2 Sorbent (particulate, bag). The sorbent shall be particulate type in accordance with A-A-1281 and packaged in 21 to 23 pound bags.

2.3.3 Sorbent (enclosed, boom type). The sorbent shall be of the non-reusable boom type in accordance with A-A-1282. Each boom shall be three inches in diameter and ten feet in length.

2.3.4 Sorbent (enclosed, pillow type). The sorbent shall be the non-reusable pillow type in accordance with A-A-1282, type II, class 2. The pillows shall be 9.50 to 10.50 inches square and 1.75 to 2.25-inches thick.

2.3.5 Hazardous material disposal bag. The bag shall be heavy duty in accordance with A-A-2299 capable of containing and transporting not less than 50 pounds of contaminated material. Bag dimensions shall be 18.00 ± .25-inches in width by 30.00 ± .25-inches in length. The bag shall be yellow and marked with black letters on both sides in two lines with the following: “HAZARDOUS MATERIAL”, “HANDLE WITH CARE”. The marking shall be hydrocarbon fuel-resistant and visible at a distance of 25 feet to an individual with normal vision.

2.3.6 Plastic drum. The plastic drum shall have a capacity of 50 to 55 gallons with a removable lid that securely fastens when closed. The drum shall be 23.00 ± .50-inches in diameter by 38.00 ± .50-inches in height. The drum shall be in accordance with CFR Title 49, part 178.509.

2.3.7 Gloves. The gloves shall be a rubber industrial type, or other material resistant to fuel and petroleum derivatives. The gloves shall be in sizes 9 and 11. The gloves shall be rolled cuff

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

type and the material shall be not less than 0.030-inches or greater than 0.040-inches thick. The gloves shall be 17.00 ± .50-inches long when measured from the tip of the index finger. The gloves shall not be suitable for electrical work.

2.3.8 Goggles. The goggles shall be industrial, eye-protective, and constructed primarily of plastic materials in accordance with A-A-1110. The goggles shall provide protection against dust and fuel spray and shall have indirect ventilation.

2.3.9 Pail. The pail shall be 5-gallon capacity in accordance with A-A-332. The pail shall have a bail and snug fitting snap-on lid.

2.3.10 Drip pan. The drip pan shall be a plastic material that is hydrocarbon fuel-resistant and rectangular in shape with dimensions not exceeding 28.00 by 24.00 by 15.00. The pan sides and ends shall slope slightly inward from top to bottom to allow nesting for storage and easier pouring of contents.

2.3.11 Bag ties. The bag ties shall be single-wire reinforced. The wire cover shall be constructed of a material that is resistant to tears and excessive use and will increase the useful life of the strip tie. The strip ties shall have a minimum thickness of 0.005-inch and a maximum thickness of 0.009-inch. The width shall be not less than 9/64 inch and not more than 13/64 inch. Each tie shall be 6.00 ± .50-inches long. The strip ties shall be smooth, free of blisters, cuts or tears.

2.3.12 Caution plate. The caution plate shall be adhesive backed pressure sensitive metal foil material with an easily removable liner. The plate shall be inscribed “HAZARDOUS MATERIAL”, “HANDLE WITH CARE” in two lines. The plate background color shall be yellow with the letters inscribed in black. The plate shall be 8.00 ± .50-inches by 12.00 ± .50-inches with the inscription oriented parallel to the long dimension and centered between plate edges.

2.3.13 Shovel. The shovel shall be a two-piece scoop type. The scoop portion shall be nonsparking material capable of scooping up oil sorbent and some contaminated soil. The handle shall be D type and nonsparking (static resistant). The two pieces of the shovel shall have a locking mechanism when joined together to prevent separation during use. Tools shall not be required to join or separate the two parts. The overall length of the shovel, when joined, shall be between 41.00 ±1.00 and 43.00 ±1.00 inches and the scoop portion not less than 11.00 inches wide by 12.00 inches long.

3. REGULATORY REQUIREMENTS

3.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs. Used, rebuilt, or remanufactured components shall not be incorporated into the kit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE

4.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such compliance.

4.2 Inspection requirements. Bid samples, when required for CID items to ensure product quality, shall be as specified in the contract or order.

4.3 Examination. The bid sample fuel spill control kits shall be physically examined for compliance with the requirements indicated by an "X" in Table II. Non-compliance with any specified requirement, or the presence of one or more defects lessening required efficiency shall constitute cause for rejection.

TABLE II. Examinations.

Number	Conformance	Defect	Reference paragraph	Method of examination
101	X	Materials not as specified.	2.1	Visual/Doc.
102	X	Kit component not as specified.	2.2	Visual/Doc.
103	X	Pad sorbent not as specified.	2.3.1	Visual/Doc./SIE
104	X	Particulate sorbent not as specified	2.3.2	Visual/Doc./SIE
105	X	Enclosed sorbent (boom type) not as specified.	2.3.3	Visual/Doc./SIE
106	X	Enclosed sorbent (pillow type) not as specified.	2.3.4	Visual/Doc./SIE
107	X	Hazardous material disposal bag not as specified.	2.3.5	Visual/Doc./SIE
108	X	Plastic drum not as specified.	2.3.6	Visual/SIE
109	X	Gloves not as specified.	2.3.7	Visual/Doc.
110	X	Goggles not as specified.	2.3.8	Visual/Doc
111	X	Pail not as specified.	2.3.9	Visual/SIE
112	X	Drip pan not as specified.	2.3.10	Visual/SIE
113	X	Bag ties not as specified.	2.3.11	Visual
114	X	Caution plate not as specified	2.3.12	Visual/SIE
115	X	Shovel not as specified.	2.3.13	Visual/SIE

Doc = Documentation SIE = Standard Inspection Equipment

4.4 Tests. Bid sample testing shall be performed as listed in 4.4.1 and 4.4.2,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

4.4.1 Tests conditions. Testing shall be conducted at ambient temperatures between 32 ± 2°F and 120 ±2 °F. The tests shall be conducted under field conditions. All contaminated material resulting from the test shall be disposed of properly.

4.4.2 Disposal bag, shovel, and sorbent test. A frame approximately six feet square shall be placed on top of plastic sheeting that will prevent fuel from passing through. Soil shall be placed in the frame and packed down. Fuel (JP-8) shall be poured on the soil, at approximately the center of the frame, until a puddle of fuel forms. The particulate sorbent shall be used to absorb the fuel. Upon absorption, the shovel shall be used to scoop the sorbent and contaminated soil into a disposal bag. Approximately 50 ± 2 pounds of contaminated material shall be placed in each bag. The bag(s) shall be closed with bag ties contained in the kit. The filled bags shall be loaded on a transport vehicle for movement to a disposal site. Failure of the sorbent to absorb the spilled fuel shall constitute failure of that part of the test. Failure of the shovel to dig up the contaminated material and place it in the disposal bag with little or no spillage shall constitute failure of that part of the test. Failure of the bag and ties to properly contain the contaminated material shall constitute failure of that part of the test. All contaminated material shall be disposed of properly.

5. PACKAGING

5.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Type of kit to be procured (see 1.1).
c. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 6.2).
d. Packaging required (see 5.1).
e. Sampling requirements, examinations and tests (see 4.2).

6.2 Source of documents.

6.2.1 The Code of Federal Regulations (CFR) may be obtained from the Information Center, Office of Hazardous Materials Standards, Research and Special Programs Administration, U.S. Department of Transportation, 400 Seventh Street, SW, Washington, D.C. 20590-0001.

6.2.2 Commercial Item Descriptions (CIDs) are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

6.3 Bid samples. When a bid sample inspection is required, the bid sample(s)must be identical to the production model. The contracting officer should include specific instructions in acquisition

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

documents regarding arrangements for examinations, approval of the bid sample results, and disposition of the bid sample.

6.4 Definitions.

6.4.1 CID. An acronym for Commercial Item Description.

6.4.2 Recovered materials. Recovered materials are those materials that have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials.

6.5 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for specification CID A-A-59359.

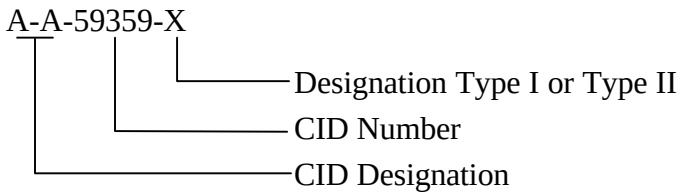

6.6 Data Requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manuals to be furnished with each fuel spill control kit. If technical manuals are required, military specifications and standards that have been cleared and listed in DoD 5010.12 L, Acquisition Management Systems and Data Requirements List (AMSDL) must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals must be acquired under a separate line item in the contract.

6.7 Provisioning. The contracting officer should include provisioning requirements for replacement parts and instructions on shipment of the fuel spill control kit.

6.8 Possible sources of products. Manufacturers of products known to meet some or all of the requirements of this CID are listed below. However, this list is only a small fraction of possible sources and is by no means exclusive. Competition is not limited to these companies.

Dresser Industries, Inc.
Dresser Mfg. Div.
41 Fisher Ave.
Bradford, PA 16701-1649

Hydrasearch Co., Inc.
100 Log Canoe Cir.
Stevensville, MD 21666

Lab Safety Supply Inc.
PO Box 1368
Janesville, WI 53547-1368

Victaulic Co. of America
4901 Kesslersville Rd.
PO Box 31
Easton, PA 18042-9153

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

Custodians:
Army – AT
Navy – YD2

Review Activities:
DLA – CC
GSA – 7FXE

Preparing activity:
Army – AT

(Project 3835-5003)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter must be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-59359	2. DOCUMENT DATE 990201

3. DOCUMENT TITLE
FUEL SPILL CONTROL KIT

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME USA TARDEC, AMSTA-TR-D/210 (Fuel & Water Handling Team)	b. TELEPHONE (Including Area Code) (1) Commercial (810)574-7744 (2) AUTOVON DSN 786-7744
c. ADDRESS (Include Zip Code) US Army Tank-automotive and Armaments Command Attn: AMSTA-TR-D/210 Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:12Z
Check the source to verify that this is the current version before use.