The documentation and process conversion measures necessary to comply with this revision shall be completed by 21 December 2025.

INCH-POUND

MIL-PRF-19500/774A
w/AMENDMENT 1
21 July 2025
SUPERSEDING
MIL-PRF-19500/774A
30 April 2020

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER, ULTRAFAST RECOVERY, TYPES 1N8255, 1N8256, 1N8257, QUALITY LEVELS JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, ultrafast recovery, low leakage, power rectifier diodes. Four levels of product assurance (JAN, JANTX, JANTXV, and JANS) are provided for each encapsulated device type as specified in MIL-PRF-19500.

1.2 Package outlines. The device package outlines for this specification sheet is an axial leaded package in accordance with figure 1 and square terminal surface mount US in accordance with figure 2.

1.3 Maximum ratings. Unless otherwise specified, T_A = +25°C.

1.3.1 Ratings applicable to all Part or Identifying Numbers (PIN). T_{STG} = $T_{J(max)}$ = -65°C to +175°C.

1.3.2 Ratings applicable to individual types.

Col. 1	Col. 2	Col. 3		Col. 4	Col. 5	Col. 6	Col. 7		Col. 8
Types	V_{RWM}	I_O (1)	I_O (2)	I_{FSM} (3)	t_{rr}	$R_{\theta JL}$ (4) (5)	$R_{\theta JEC}$ (5) US	SUS	$T_{J(max)}$ and T_{STG}
	V	A		A(pk)	ns	°C/W	°C/W	°C/W	°C
1N8255, US, SUS	100	4.0	6.0	125	30	32	8.5	6.5	-65 to +175
1N8256, US, SUS	150	4.0	6.0	125	30	32	8.5	6.5	-65 to +175
1N8257, US, SUS	200	4.0	6.0	125	30	32	8.5	6.5	-65 to +175

(1) Axial lead @ T_L < +55°C, L = .375 in. (9.52 mm) derate at 33.3 mA /ºC above rated T_L.
(2) Surface mount (US package), T_{EC} < +125°C derate at 120 mA /ºC above rated T_{EC}.
Surface mount (SUS package), T_{EC} < +135°C derate at 150 mA /ºC above rated T_{EC}.
(3) I_{FSM} at +25°C operating at I_O t_P = 8.3 ms sine wave.
(4) $R_{\theta JL}$ at L = .375 in. (9.52 mm).
(5) See figure 3 for thermal impedance curves.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified, T_A = +25°C.

Types	V_{BR} at 100 µA, pulse ≤ 20 ms	I_{R1} at $V_R = V_{RWM}$ T_A = +25°C, pulsed V_R ≤ 20 ms	I_{R2} at $V_R = V_{RWM}$ T_A = +150°C, pulsed V_R ≤ 20 ms
	Volts	µA	µA
1N8255, US, SUS	110	2.0	100
1N8256, US, SUS	160	2.0	100
1N8257, US, SUS	210	2.0	100

1.5 PIN. The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example, and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level. The JAN certification mark and quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", "JANTXV", and "JANS".

1.5.2 Device type. The designation system for the device types covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The devices of this specification sheet use the first number and letter symbols "1N".

1.5.2.2 Second number symbols. The second number symbols for the devices covered by this specification sheet are as follows: "8255", "8256", and "8257".

1.5.3 Suffix symbols. The following suffix symbols are incorporated in the PIN as applicable.

	A blank suffix symbol indicates an axial diode package (see figure 1).
US	Indicates an axial surface mount package with square endcaps (see figure 2).
SUS	Indicates an axial surface mount package with square endcaps, but with a body length that is smaller than the US package herein (see figure 2).

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML-19500) before contract award (see 4.2 and 6.3).


3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows:

$I_{(BR)}$ – Current for testing breakdown voltage.
P_{RM} – Peak reverse power.
V_{FR} – Forward recovery voltage.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500, and figures 1 and 2 herein.

3.4.1 Diode construction. These devices shall be constructed utilizing high temperature metallurgical bonding between both sides of the silicon die and terminal pins. Metallurgical bond shall be in accordance with the requirements of category I of MIL-PRF-19500. Point contacts and Silver button Dumet design shall not be acceptable. The US and SUS version devices shall be structurally identical to the axial leaded devices except for lead terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

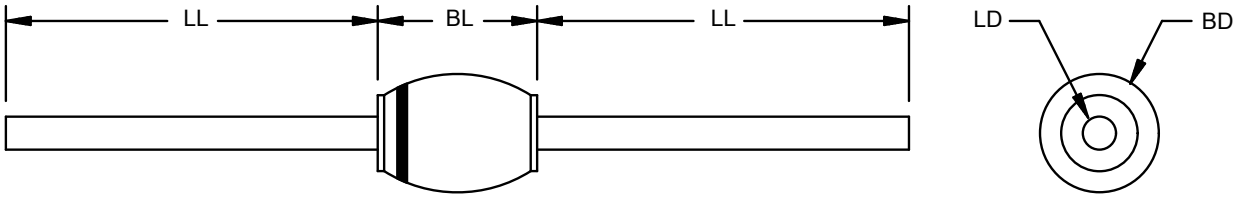


Symbol	Dimensions - axial lead device				Notes
	inch	inch	mm	mm	
	Min	Max	Min	Max	
BD	---	.100	---	2.54	2
BL	.140	.160	3.56	4.06	3
LD	.027	.031	.686	.787	4
LL	1.00	---	25.4	---	

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimension BD shall be measured at the largest diameter.
3. Dimension BL shall include the entire body including slugs and sections of the lead over which the diameter is uncontrolled. This uncontrolled area is defined as the zone between the edge of the diode body and extending .050 inch (1.27 mm) maximum onto the leads.
4. Dimensions are pre-solder dip.

FIGURE 1. Physical dimensions for axial leaded package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

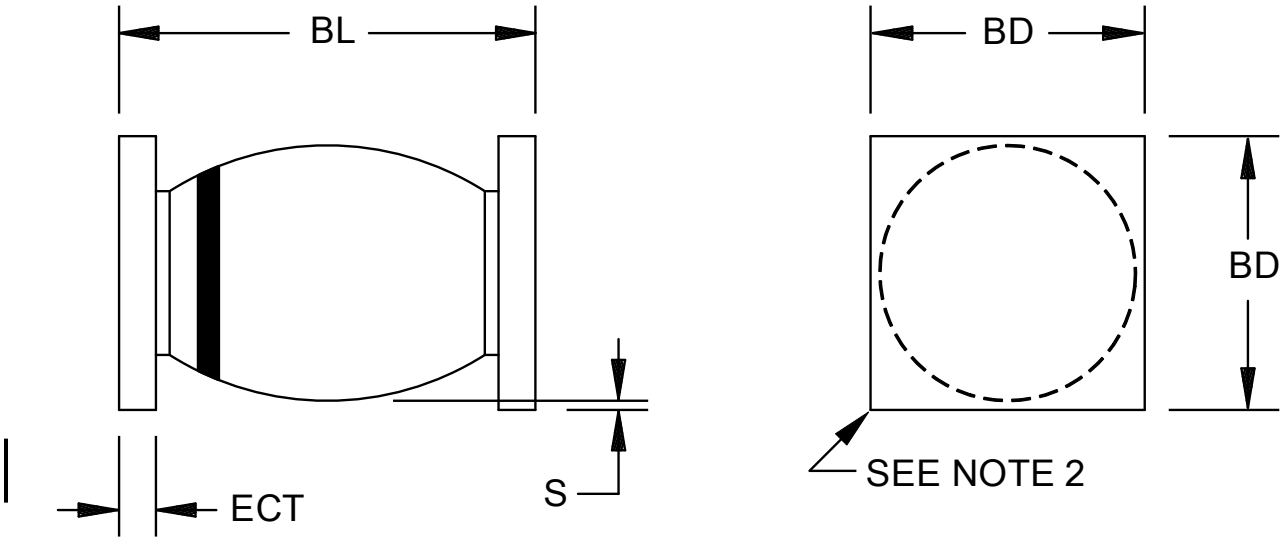

Symbol	Dimensions				Notes
	Inch	Inch	mm	mm	
	Min	Max	Min	Max	
BD	.097	.110	2.46	2.79	2
BL US package	.190	.210	4.83	5.33	
BL SUS package	.150	.165	3.81	4.19	
ECT	.022	.028	.559	.711	
S	.003	---	.076	---	4

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. End tabs may have a corner radius of .010 inch (0.25 mm) maximum.
3. Dimensions are pre-solder dip.
4. Minimum clearance of diode body to mounting surface on all orientations.
5. Cathode marking to be either in color band or a color dot on the face of the end tab.
6. Color dots will be .020 inch (0.51 mm) diameter minimum and shall not lie within .015 inch (0.51 mm) of the mounting surface.

FIGURE 2. Physical dimensions for US and SUS surface mount packages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

3.4.2 Lead finish. Unless otherwise specified, lead or end-cap finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. When solder alloy is used for finish, the maximum lead temperature is limited to 175°C maximum. Where a choice of finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Devices shall be marked as specified in MIL-PRF-19500. No color coding shall be permitted.

3.5.1 Marking of US and SUS versions. For US and SUS versions only, all marking may be omitted from the device except for the cathode marking. All marking which is omitted from the body of the devices shall appear on the label of the initial container.

3.5.2 Polarity. The polarity shall be indicated with a contrasting color band to denote the cathode end. For US and SUS devices a minimum of three evenly spaced contrasting color dots around the periphery of the cathode end may be used.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I, II, and III).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E inspection. Group E inspection shall be performed for qualification or requalification only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

4.3 Screening (quality levels JANS, JANTXV and JANTX only). Screening shall be in accordance with appendix E, table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	JANS level	JANTXV and JANTX level
3c (1)	Thermal impedance (see 4.3.1)	Thermal impedance (see 4.3.1)
9	Group A, subgroup 2	Not required
10	Method 1038 of MIL-STD-750, condition A, T_A = 150°C	Method 1038 of MIL-STD-750, condition A, T_A = 150°C
11	Group A, subgroup 2, Delta limits in accordance with table III	Group A subgroup 2, Delta limits in accordance with table III
12	Method 1038 of MIL-STD-750, condition B, see 4.3.2, t = 240 hours min	Method 1038 of MIL-STD-750, condition B, see 4.3.2, t = 96 hours min
13	Group A, subgroup 2 and 3, Delta limits in accordance with table III, Scope display evaluation (see 4.5.2)	Group A, subgroup 2, Delta limits in accordance with table III, Scope display evaluation (see 4.5.2).

(1) Shall be performed anytime after temperature cycling, screen 3a; TX and TXV levels do not need to be repeated in screening requirements.

4.3.1 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, and K factor where appropriate. See table E-IX of MIL-PRF-19500, group E, and table II, subgroup 4 herein.

4.3.2 Power burn-in conditions. The power burn-in conditions shall be in accordance with 4.5.3 and as follows: T_A = 55°C maximum and T_J = 135°C minimum. $I_{O(min)}$ = 1A, $V_{r(pk)}$ = rated V_{RWM}, adjust I_O or T_A to achieve the required T_J.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. The $Z_{\theta JX}$ end-point measurements shall be derived by the supplier and approved by the qualifying activity. This $Z_{\theta JX}$ end-point measurements shall also be documented in the qualification report.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-VIA (JANS) and table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

4.4.2.1 Quality level JANS.

Subgroup	Method	Condition
B3	4066	Condition A. I_{FSM} = rated (see 1.3.2); ten surges of 8.3 ms each at 1 minute intervals, superimposed on I_O = 1.0A, V_{RWM} = rated, see col. 2 of 1.3.2. T_A=25°C.
B4	1037	I_O = 1 A minimum; V_R = rated V_{RWM} (see 1.3.2); 2,000 cycles. End-points shall include delta limits in accordance with Table III.
B5	1027	I_O = 1 A minimum, t = 1,000 hrs, V_R = rated V_{RWM} (see col. 2 of 1.3.2) adjust I_O or T_A to achieve T_J = 175°C minimum; f = 50 to 60 Hz. T_A = 55°C max. For irradiated devices, include t_{rr} as an end-point measurement. End-points shall include delta limits in accordance with Table III.
B8	4065	Peak reverse power: For 1N8255 thru 1N8257, P_{RM} ≥ 636 W for square wave in accordance with TM 4065 (P_{RM} ≥ 1,000 W for half sine-wave). Test shall be performed on each sublot; sampling plan: n = 10, c = 0, electrical end-points, see table I, subgroup 2 herein.

4.4.2.2 Quality levels JAN, JANTX, and JANTXV.

Subgroup	Method	Condition
B3	4066	Condition A. I_{FSM} = rated (see 1.3.2); ten surges of 8.3 ms each at 1 minute intervals, superimposed on I_O = 1.0A, V_{RWM} = rated, see col. 2 of 1.3.2. T_A = 25.
B3	1027	I_O = 1 A minimum; apply V_R = rated V_{RWM} (see col. 2 of 1.3.2) adjust I_O to achieve T_J = 150°C minimum; f = 50 to 60 Hz. T_A = 55°C max. For irradiated devices, include t_{rr} as an end-point measurement. End-points shall include delta limits in accordance with table III.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500. See table III herein for delta limits when applicable.

Subgroup	Method	Condition
C2	2036	Axial devices only: Condition A, 6 pounds (2.72 kg), t = 15s. Condition E, 8 oz (0.226 kg)
C2	2038	US and SUS devices only: Condition B, 6 pounds (2.72 kg), t = 15s. Condition E, 8 oz (0.226 kg), (lead fatigue is not applicable to US and SUS diodes). Suitable fixtures shall be used to pull the end-caps in a manner that does not aid construction.
C5	4081	For axial leaded devices: $R_{\theta JL(maximum)}$ see col. 6 of 1.3.2 and 4.3.1 herein. L = .375 inch (9.53mm). For surface mount devices (US and SUS): $R_{\theta JEC}$, see col. 7 of 1.3.2 and 4.3.1 herein.
C6	1026	I_O = 1 A minimum; apply V_R = rated V_{RWM} (see col. 2 of 1.3.2) adjust I_O to achieve T_J = 150°C minimum; f = 50 to 60 Hz. T_A = 55°C max. For irradiated devices, include t_{rr} as an end-point measurement. End-points shall include delta limits in accordance with Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table II, table E-IX of MIL-PRF-19500 and as specified herein. See table III herein for delta limits when applicable.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Scope display evaluation. Scope display evaluation shall be performed using condition A (stable only) in accordance with method 4023 of MIL-STD-750. Scope display may be performed on ATE (automatic test equipment) for screening only with the approval of the qualifying activity. Scope display in table I, subgroup 4 shall be performed on a curve tracer. The reverse current (I_{BR}) shall be 100 ≤ μA peak.

4.5.3 Burn-in and life tests. These tests shall be conducted with a half-sine waveform of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conduction angle of the rectified current shall be neither greater than 180 degrees nor less than 150 degrees. Use method 3100 of MIL-STD-750 to measure T_J. The use of a current limiting or ballast resistor is permitted provided that each DUT still sees the I_o and that the required voltage, where applicable, is maintained through-out the burn-in period.

4.5.4 Thermal resistance. Thermal resistance measurement shall be performed in accordance with method 4081 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, and t_H. See table E-IX of MIL-PRF-19500, subgroup 4. Forced moving air or draft shall not be permitted across the devices during test.

4.5.5 Peak reverse power characterization. The testing to characterize P_{RM} shall be conducted in accordance with method 4065 of MIL-STD-750. The following details shall apply:

a. During the test, the voltage (V_{BR}) shall be monitored to verify it has not collapsed.

b. Any collapse in V_{BR} during or after the test, or rise in leakage current (I_R) after the test that exceeds I_{R1} in table I, shall be considered a failure to that level of applied P_{RM}.

c. Progressively higher levels of P_{RM} shall be applied until failure occurs on all devices within the chosen sample size to characterize each sublot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 2/	3101	See 4.3.1, T_H = 50 ms, I_H = 12 A, I_M = 10 mA, t_{MD} = 70 µs	$Z_{\theta JX}$		3.4	°C/W
Forward voltage	4011	Condition B; pulsed (see 4.5.1)				
1N8255, 1N8256		I_{FM} = 1A	V_{FM1}		.810	V
1N8257		I_{FM} = 1A	V_{FM1}		.820	V
1N8255, 1N8256		I_{FM} = 3A	V_{FM2}		.865	V
1N8257		I_{FM} = 3A	V_{FM2}		.890	V
1N8255, 1N8256		I_{FM} = 4A	V_{FM3}		.875	V
1N8257		I_{FM} = 4A	V_{FM3}		.940	V
1N8255, 1N8256		I_{FM} = 6A	V_{FM4}		.925	V
1N8257		I_{FM} = 6A	V_{FM4}		1.00	V
Reverse current	4016	Condition A or B, pulsed (see 4.5.1). V_R = rated	I_{R1}		2.0	µA
Breakdown voltage	4021	$I_{(BR)}$ = 100 µA, pulse ≤ 20 ms	$V_{(BR)1}$			
1N8255				110		V
1N8256				160		V
1N8257				210		V
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current	4016	Condition A or B, pulsed, (see 4.5.1) V_R = rated (see col 2 of 1.3.2)	I_{R2}		100	µA
Low-temperature operation:		T_A = -65°C				
Forward voltage	4011	Condition B, pulsed, (see 4.5.1). I_{FM} = 4A	V_{FM9}		1.25	V

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 4						
Reverse recovery time	4031	Condition A; I_F = 1.0 A, I_{RM} = 1.0 A, $i_{(REC)}$ = 0.1 A	t_{rr}		30	ns
Forward recovery time	4026	I_F = 50 mA, the test is measured at V_{FR} = 1.1 x V_F at 3 x t_{fr}	t_{fr}		15	ns
Capacitance 1N8255, 1N8256 1N8257	4001	f = 1 MHz; Vr = 10 V	C_J		 55 50	 pF pF
Scope display evaluation	4023	See 4.5.2, n = 116, c = 0				
Subgroup 5						
Not applicable						
Subgroup 6						
Forward surge	4066	Condition A, ten surges of 8.3 ms each at 1 minute intervals superimposed on I_O = 1.0 A; V_{RWM} = rated (see 1.3.2); T_A = + 25°C	I_{FSM}		125	A
Electrical measurements		See table I, subgroup				
Subgroup 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.
2/ This test required for the following end-point measurements only:
Group B, subgroups 2 and 3 (JAN, JANTX, JANTXV).
Group B, subgroups 3 and 4 (JANS).
Group C, subgroups 2 and 6.
Group E, subgroup1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification and requalification only.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			45 devices c = 0
Thermal shock (liquid to liquid)	1056	20 cycles, condition D except low temperature shall be achieved using liquid nitrogen (-195°C). Perform a visual for cracked glass.	
Temperature cycling (air to air)	1051	-65°C to +175°C, 500 cycles.	
Hermetic seal 1/	1071		
Electrical measurement		See table I, subgroup 2 and table III, steps 1 and 2.	
Subgroup 2			45 devices c = 0
Steady-state dc blocking life	1048	t = 1,000 hours; T_A = +150°C; V_R dc = 80 to 85 percent rated V_{RWM} (see 1.3.2).	
Electrical measurement		See table I, subgroup 2 herein, except $Z_{\theta JX}$ need not to be performed, and table III, steps 1 and 2 herein. For irradiated devices, include t_{rr} as an end-point measurement.	
Subgroup 4			Sample size N/A
Thermal impedance curves		See MIL-PRF-19500.	
Subgroup 6			
ESD	1020		
Subgroup 8			n = 45
Peak reverse power	4065	P_{RM} shall be characterized by the supplier and this data shall be available to the Government. Test shall be performed on each sublot.	
Electrical measurement		See 4.5.5	
Subgroup 9			n = 45
Resistance to glass cracking	1057	Step stress to destruction by increasing cycles or up to a maximum of 25 cycles.	
Subgroup 10			22 devices c = 0
Forward surge current	4066	Condition A, I_{FSM} = rated (see 1.3.2); ten surges of 8.3 ms each at 1 minute intervals superimposed on $I_O = I_{O1}$ rated (see 1.3.2); V_{RWM} = rated (see 1.3.2); T_A = + 25°C.	
Electrical measurement		See table I, subgroup 2.	

1/ Opaque glass double plug non-cavity axial lead diodes may use TM2068 in lieu of TM1071.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

TABLE III. Delta measurements for Group A, B, C, and E. 1/ 2/ 3/ 4/ 5/

Step	Inspection	MIL-STD-750		Symbol	Limit	Unit
		Method	Conditions			
1.	Forward voltage	4011	Condition B, I_{FM} = 3 A(pk), pulsed (see 4.5.1)	ΔV_{FM2}	±50 mV dc change from initial value.	
2.	Reverse current	4016	Condition A or B, pulsed, see 4.5.1) V_R = rated V_{RWM} (see col. 2 of 1.3.2)	ΔI_R	±100 percent or ±200 nA change from initial reading, whichever is greater.	

1/ The delta measurements taken during group B inspections for quality level JANS (table E-VIA of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroups 4 and 5, the measurements of steps 1 and 2 of this table shall also be taken.
2/ The delta measurements taken during group B inspections for quality levels JAN, JANTX and JANTXV (table E-VIB of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroup 3, the measurements of steps 1 and 2 of this table shall also be taken.
3/ The delta measurements taken during group C inspections for all quality levels (table E-VII of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroup 6, the measurements of steps 1 and 2 of this table shall also be taken.
4/ The delta measurements taken during group E inspections for all quality levels (table E-IX of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroups 1 and 2, the measurements of steps 1 and 2 of this table shall also be taken.
5/ Devices which exceed the table I limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

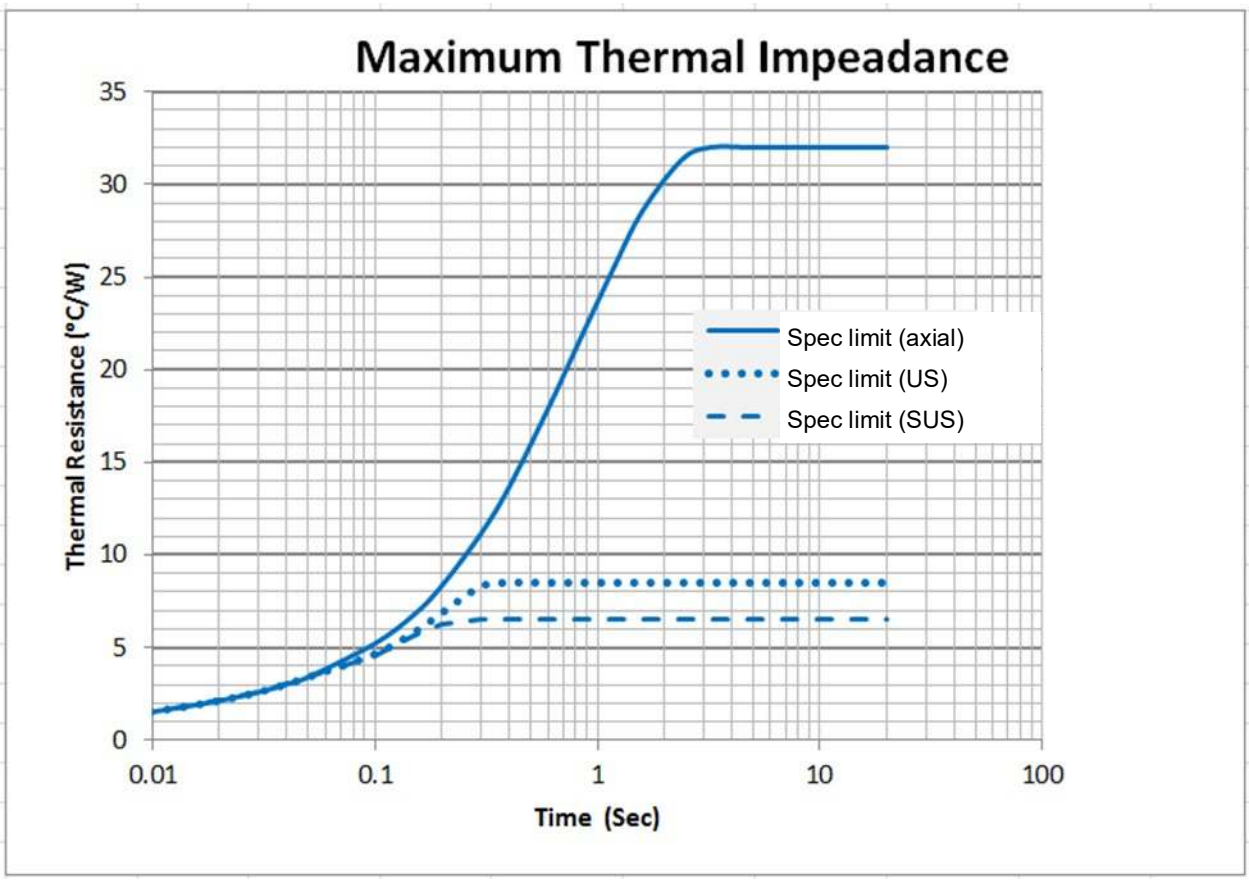


FIGURE 3. Thermal impedance $Z_{\theta JX}$ maximum 3.40 °C/W @ 50 mS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.


b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.2).

d. The complete PIN, see 1.5 and 6.4.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

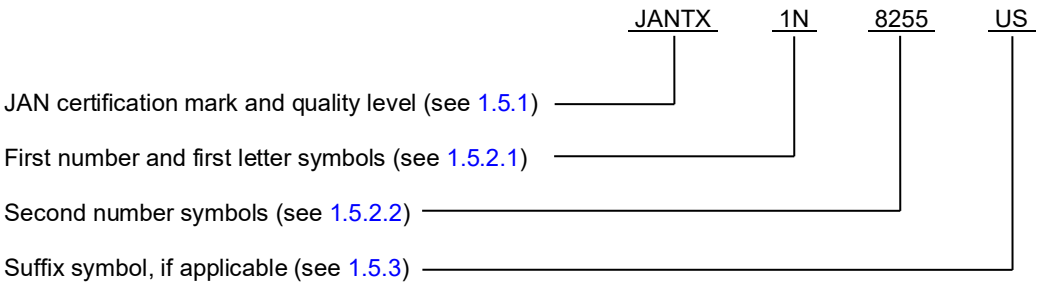

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.

6.5 PINs for encapsulated devices. The following is a list of possible PINs for encapsulated devices available on this specification sheet.

PINs for types 1N8255	PINs for types 1N8256	PINs for types 1N8257
JAN1N8255	JAN1N8256	JAN1N8257
JAN1N8255US	JAN1N8256US	JAN1N8257US
JAN1N8255SUS	JAN1N8256SUS	JAN1N8257SUS
JANTX1N8255	JANTX1N8256	JANTX1N8257
JANTX1N8255US	JANTX1N8256US	JANTX1N8257US
JANTX1N8255SUS	JANTX1N8256SUS	JANTX1N8257SUS
JANTXV1N8255	JANTXV1N8256	JANTXV1N8257
JANTXV1N8255US	JANTXV1N8256US	JANTXV1N8257US
JANTXV1N8255SUS	JANTXV1N8256SUS	JANTXV1N8257SUS
JANS1N8255	JANS1N8256	JANS1N8257
JANS1N8255US	JANS1N8256US	JANS1N8257US
JANS1N8255SUS	JANS1N8256SUS	JANS1N8257SUS

6.6 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@dla.mil .

6.7 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army − CR
Navy − SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Army − AR, AV, MI, SM
Navy − AS, MC
Air Force − 19, 71

Preparing activity:
DLA − CC

(Project 5961−2025−064)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:54Z
Check the source to verify that this is the current version before use.