The documentation and process conversion measures necessary to comply with this revision shall be completed by 30 October 2025.

INCH-POUND
MIL-PRF-19500/775C
w/AMENDMENT 2
30 July 2025
SUPERSEDING
MIL-PRF-19500/775C
w/AMENDMENT 1
28 July 2023

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, FIELD EFFECT RADIATION HARDENED, N-CHANNEL, SILICON, TYPES 2N7647, 2N7648, AND 2N7649, QUALITY LEVELS JANTXV AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for an N-channel, enhancement-mode, MOSFET, radiation hardened (total dose and single event effects (SEE)), power transistor. Two levels of product assurance (JANTXV and JANS) are provided for each encapsulated device. Provisions for radiation hardness assurance (RHA) to two radiation levels ("R" and "F") are provided for JANTXV and JANS product assurance level.

1.2 Package outlines. The device package outlines are as follows: TO-257AA (T3) in accordance with figure 1, a modified tab-lessTO-257AA (D5) in accordance with figure 2, a surface mount TO-276AA (U3, U3C) in accordance with figure 3, and a surface mount similar to TO-276AA (U3CE) in accordance with figure 4, for all encapsulated device types.

1.3 Maximum ratings. T_A = +25°C, unless otherwise specified.

Type	P_T (1) T_C = +25°C	P_T T_A = +25°C	$R_{\theta JC}$ (2)	V_{DS}	V_{DG}	V_{GS}	I_{D1} (3) (4) T_C = +25°C	I_{D2} T_C = +100°C	I_S	I_{DM} (5)	T_J and T_{STG}	V_{ISO} 70,000 ft. altitude
	W	W	°C/W	V dc	V dc	V dc	A dc	A dc	A dc	A (pk)	°C	V dc
2N7647U3, U3CE	75	1.56	1.67	60	60	±20	40	29	40	160		
2N7647T3, 2N7647D5	75	1.56	1.67	60	60	±20	30	28	30	120	-55	
2N7648U3, U3CE	75	1.56	1.67	100	100	±20	35	22	35	140	to	250
2N7648T3, 2N7648D5	75	1.56	1.67	100	100	±20	30	22	30	120	+150	
2N7649U3, U3CE	75	1.56	1.67	250	250	±20	17	10.5	17	68		
2N7649T3, 2N7649D5	75	1.56	1.67	250	250	±20	17	10.5	17	68		

(1) Derate linearly by 0.6 W/°C for T_C > +25°C.
(2) See figure 5, thermal impedance curves.
(3) The following formula derives the maximum theoretical I_D limit. I_D is limited by package and internal wires and may be limited by pin diameter:

$$I_D = \sqrt{\frac{T_{JM} - T_C}{(R_{\theta JC}) \times (R_{DS}(on) \text{ at } T_{JM})}}$$

(4) See figure 6, maximum drain current graph.
(5) I_{DM} = 4 X I_{D1}; I_{D1} as calculated by footnote (3).
(6) Unless otherwise specified, electrical characteristics for the U3 suffix devices are identical to the U3C, and U3CE suffix devices.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A
FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics at T_C = +25°C.

Type	Min $V_{(BR)DSS}$ V_{GS} = 0 I_D = 1.0mA dc	$V_{GS(TH)1}$ $V_{DS} \geq V_{GS}$ I_D = 1.0 mA dc		Max I_{DSS1} V_{GS} = 0 V_{DS} = 80% of rated V_D	Max $r_{DS(on)}$ (1) V_{GS} = 12V, $I_D = I_{D2}$		E_{AS}
					T_J = +25°C	T_J = +150°C	
	V dc	V dc Min	Max	µA dc	Ω	Ω	mJ
2N7647U3, U3CE	60	2.0	4.0	1.0	0.018	0.038	840
2N7647T3, 2N7647D5	60	2.0	4.0	1.0	0.019	0.040	784
2N7648U3, U3CE	100	2.0	4.0	1.0	0.034	0.062	605
2N7648T3, 2N7648D5	100	2.0	4.0	1.0	0.035	0.064	605
2N7649U3, U3CE	250	2.0	4.0	1.0	0.110	0.264	331
2N7649T3, 2N7649D5	250	2.0	4.0	1.0	0.110	0.264	331

(1) Pulsed (see 4.5.1).
(2) Unless otherwise specified, electrical characteristics for the U3 suffix devices are identical to the U3C, and U3CE suffix devices.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.5 for PIN construction example and 6.6 for a list of available PINs.

1.5.1 JAN certification mark and quality level. The only quality level designators for encapsulated devices that are applicable for this specification sheet are the quality levels "JANTXV" and "JANS".

1.5.2 Radiation hardness assurance (RHA) designator. The RHA levels that are applicable for this specification sheet from lowest to highest are as follows: "R" and "F".

1.5.3 Device type. The designation system for the device types of transistors covered by this specification sheet are as follows.

1.5.3.1 First number and first letter symbols. The transistors of this specification sheet use the first number and letter symbols "2N".

1.5.3.2 Second number symbols. The second number symbols for the transistors covered by this specification sheet are as follows: "7647", "7648", and "7649".

1.5.4 Suffix letters. The following suffix letters are incorporated in the PIN for this specification sheet:

T3	Indicates a metal lidded 3 terminal leaded package similar to a TO-257AA (see figure 1)
D5	Indicates a metal lidded 3 terminal leaded package similar to a tab-less TO-257AA (see figure 2)
U3	Indicates a metal lidded 3 pad surface mount package similar to a TO-276AA (SMD-0.5) (see figure 3).
U3C	Indicates a ceramic lidded 3 pad surface mount package similar to a TO-276AA (SMD-0.5) (see figure 3).
U3CE	Indicates a ceramic lidded 3 pad surface mount package with enhanced PCB mount features, similar to a TO-276AA (SMD-0.5) (see figure 4).

1.5.5 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

* 1.6 Radiation features. The following radiation features are applicable for RHA devices supplied to this specification sheet.

* 1.6.1 Maximum total ionizing dose (TID). The maximum TID available in accordance with test method 1019, condition A (dose rate = 50 to 300 rad(Si)/s) of MIL-STD-750 are as follows:

For device type 2N7647, 2N7648, AND 2N7649: ..... 300 krad(Si) 1/

* 1.6.2 Heavy ion irradiation SEE. SEE testing includes Single-Event Burnout (SEB) and Single-Event Gate Rupture (SEGR) tests at the specified linear energy transfer (LET) units. See 6.7 for the specific RHA SEE characterization testing details. The following characterization conditions were used for the testing to the requirements herein:

For device type 2N7647:
No SEB or SEGR were observed at surface LET (see table IV) ..... ≤ 90 MeV·cm^2/mg 2/
(In-situ Bias V_{DS} = 60 V and V_{GS} = -3 V)


For device type 2N7648:
No SEB or SEGR were observed at surface LET (see table IV) ..... ≤ 89.75 MeV·cm^2/mg 2/
(In-situ Bias V_{DS} = 100 V and V_{GS} = -3 V)

For device type 2N7649:
No SEB or SEGR were observed at surface LET (see table IV) ..... ≤ 88.6 MeV·cm^2/mg 2/
(In-situ Bias V_{DS} = 250 V and V_{GS} = -1 V)

* 1/ The manufacturers supplying these device types have performed characterization testing in accordance with condition A (dose rate = 50 to 300 rad(Si)/s) of method 1019 of MIL-STD-750. The radiation end point limits are guaranteed only to a maximum TID level of 300 krad(Si).
* 2/ The manufacturers have performed SEE tests at Texas A&M University (TAMU) Radiation Effects Facility in accordance with method 1080 of MIL-STD-750. For more information on SEE testing and results, customers should contact the qualified manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions			
	in	in	mm	mm
	Min	Max	Min	Max
BL	.410	.430	10.41	10.92
BL_1		.033		0.84
CH	.190	.200	4.83	5.08
LD	.025	.035	0.64	0.89
LL	.600	.650	15.24	16.51
LO	.120 BSC		3.05 BSC	
LS	.100 BSC		2.54 BSC	
MHD	.140	.150	3.56	3.81
MHO	.527	.537	13.39	13.64
TL	.645	.665	16.38	16.89
TT	.035	.045	0.89	1.14
TW	.410	.420	10.41	10.67

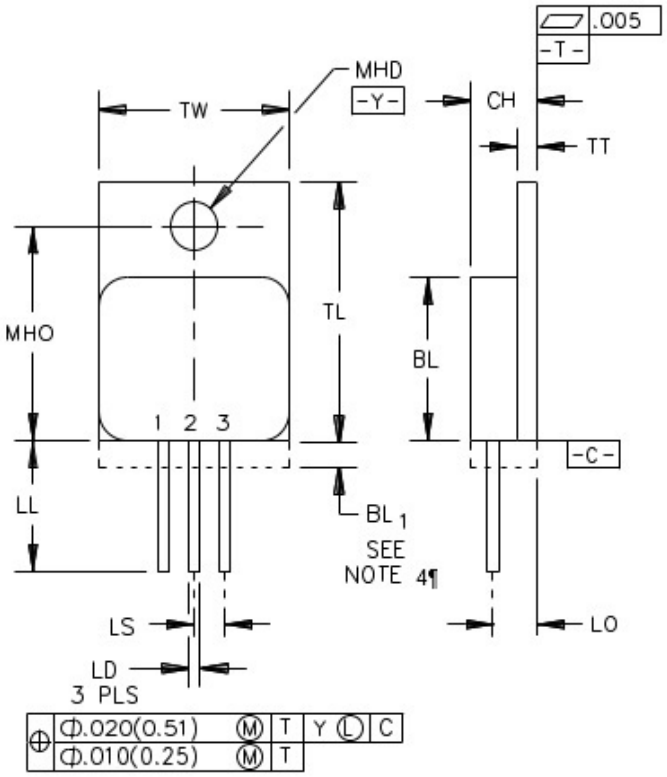


Term 1	Drain
Term 2	Source
Term 3	Gate

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. All terminals are isolated from the case.
4. This area is for the lead feed-thru eyelets (configuration is optional, but will not extend beyond this zone).

FIGURE 1. Dimensions and configuration, TO-257AA (T3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

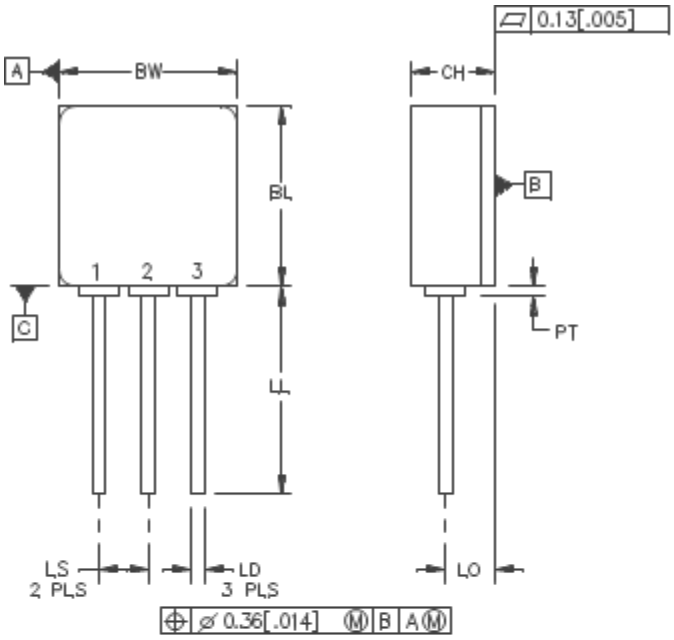


Ltr	Dimension				Notes
	in	in	mm	mm	
	Min	Max	Min	Max	
BL	.410	.430	10.42	10.92	
BW	.410	.420	10.42	10.67	
CH	.190	.200	4.83	5.08	
LD	.025	.035	0.64	0.88	
LL	.500	.625	12.7	15.88	3
LO	.120 BSC		3.05 BSC		
LS	.100 BSC		2.54 BSC		
PT		.028		0.71	3
Term 1	Drain				
Term 2	Source				
Term 3	Gate				

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Protrusion thickness (PT) of ceramic eyelets included in dimension LL.
4. All terminals are isolated from case.

FIGURE 2. Physical dimensions for TO-257AA modified (tab-less package metal lid) D5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

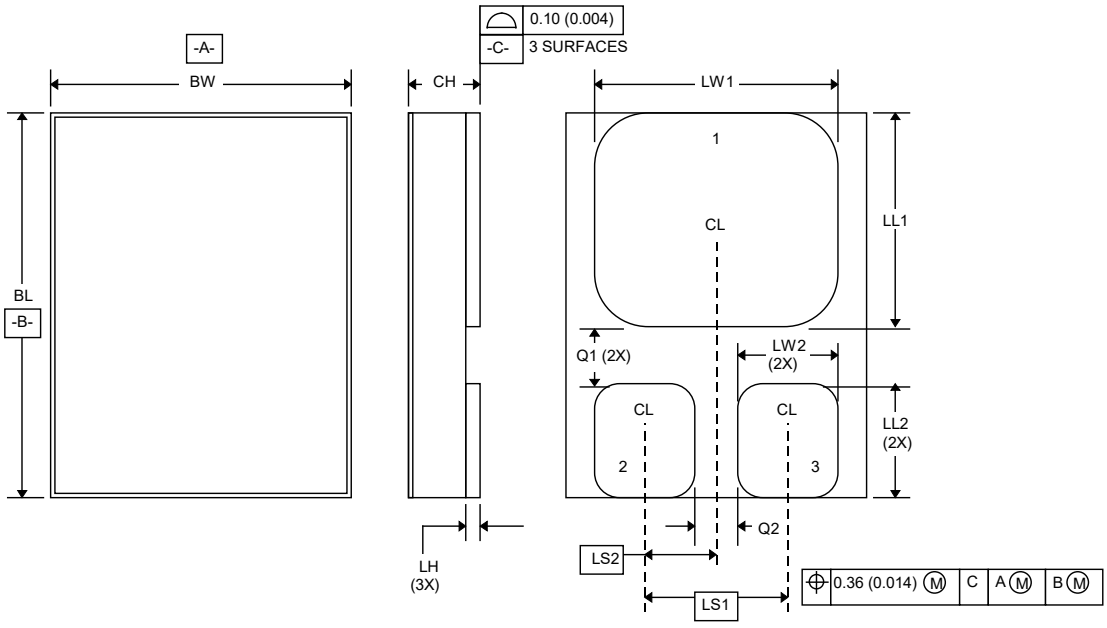


Symbol	Dimensions			
	Inches	Inches	Millimeters	Millimeters
	Min	Max	Min	Max
BL	.395	.405	10.04	10.28
BW	.291	.301	7.40	7.64
CH (for U3)		.124		3.15
CH (for U3C)		.134		3.39
LH	.010	.020	0.25	0.51
LW1	.281	.291	7.14	7.39
LW2	.090	.100	2.29	2.54
LL1	.220	.230	5.59	5.84
LL2	.115	.125	2.93	3.17
LS1	.150 BSC		3.81 BSC	
LS2	.075 BSC		1.91 BSC	
Q1	.030		0.762	
Q2	.030		0.762	
TERM 1	Drain			
TERM 2	Gate			
TERM 3	Source			

NOTES:
1. Dimension are in inches.
2. Millimeters are given for information only.
3. The lid shall be electrically isolated from the drain, gate, and source.
4. Metal lid: U3 suffix; Ceramic lid: U3C suffix.

FIGURE 3. Dimensions and configuration (TO-276AA, SMD-0.5), with metal lid or ceramic lid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

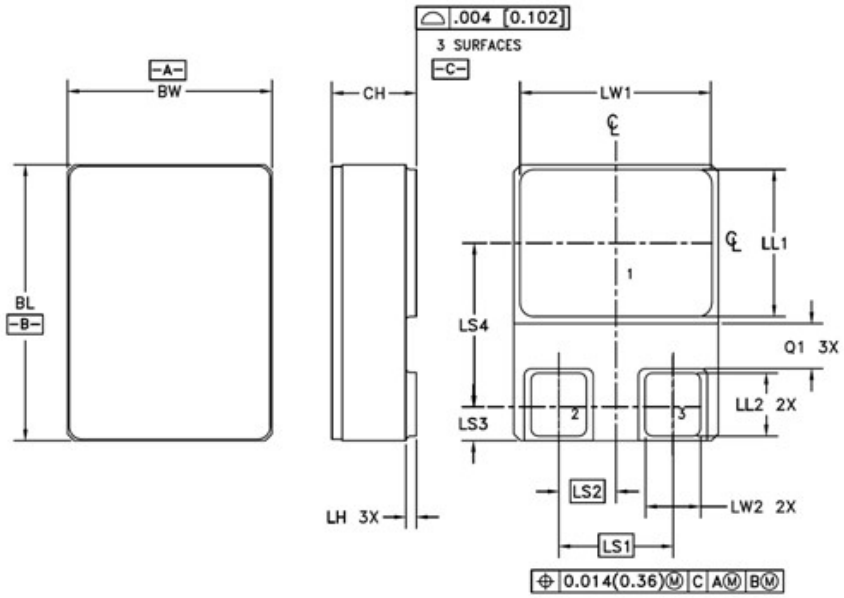

Symbol	Dimensions			
	Inches	Inches	Millimeters	Millimeters
	Min	Max	Min	Max
BL	.395	.405	10.04	10.28
BW	.291	.301	7.40	7.64
CH		.122		3.09
LH	.008	.022	0.20	0.55
LW1	.271	.281	6.88	7.14
LW2	.075	.085	1.91	2.16
LL1	.208	.218	5.28	5.54
LL2	.087	.097	2.21	2.46
LS1	.165 BSC		4.19 BSC	
LS2	.083 BSC		2.10 BSC	
LS3	.053 BSC		1.35 BSC	
LS4	.234 BSC		5.93 BSC	
Q1	.060		1.52	
TERM 1	Drain			
TERM 2	Gate			
TERM 3	Source			

NOTES:
1. Dimensions are in inches, Millimeters are given for information only.
2. Dimension tolerances ±.005.
3. The lid shall be electrically isolated from the drain, gate, and source.
4. Dimensions apply before solder finish.

FIGURE 4. Dimensions and configuration (Similar to TO-276AA, SMD-0.5), with ceramic lid U3CE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.
MIL-STD-883 - Test Method Standard Microcircuits

(Copies of these documents are available online at https://quicksearch.dla.mil/).

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figures 1 (T3, TO-257AA with metal lid), 2 (TO-257AA with metal lid and tab-less), 3 (U3, U3C, surface mount TO-276AA), and 4 (U3CE, surface mount similar to TO-276AA) herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Multiple chip construction. Multiple chip construction is not permitted to meet the requirements of this specification.

3.4.3 Silicone die coating. The use of a silicone die coat requires a successful completion of MIL-STD-883, method 5011 on each silicone lot for its intended applications, and as part of the full MIL-PRF-19500 qualification process.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrostatic discharge sensitive (ESDS). The devices covered by this specification sheet have been classified as ESDS. The devices shall be handled in accordance with the ESD program established to comply with the requirements of MIL-PRF-19500 to avoid damage due to the accumulation of static charge. The following handling practices shall be followed:

a. Devices should be handled on benches with conductive handling devices.

b. Ground test equipment, tools, and personnel handling devices.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent if practical.

g. Care should be exercised during test and troubleshooting to apply not more than maximum rated voltage to any lead.

h. Gate shall be terminated to source, R ≤ 100 kΩ, whenever bias voltage is to be applied drain to source.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.2.1.1 Single event effects (SEE). SEE shall be performed at initial qualification and after process or design changes which may affect radiation hardness (see table III and table IV). Upon qualification, manufacturers shall provide the verification test conditions from section 5 of method 1080 of MIL-STD-750 that were used to qualify the device for inclusion into section 6 of the slash sheet. End-point measurements shall be in accordance with table II. SEE characterization data shall be made available upon request of the qualifying or acquiring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

4.3 Screening of encapsulated devices. Screening of packaged devices shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (1) (2)	Measurements for JANS	Measurements for JANTXV
(3)	Gate stress test (see 4.3.1)	Gate stress test (see 4.3.1)
(3)	Method 3470 of MIL-STD-750, E_{AS} (see 4.3.2)	Method 3470 of MIL-STD-750, E_{AS} (see 4.3.2)
(3) 3c	Method 3161 of MIL-STD-750, thermal impedance, (see 4.3.3)	Method 3161 of MIL-STD-750, thermal impedance, (see 4.3.3)
9	Subgroup 2 of table I herein	Not applicable
10	Method 1042 of MIL-STD-750, test condition B	Method 1042 of MIL-STD-750, test condition B
11	Subgroup 2 of table I herein. ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ±10 μA dc or ±100 percent of initial value, whichever is greater.	Subgroup 2 of table I herein.
12	Method 1042 of MIL-STD-750, test condition A	Method 1042 of MIL-STD-750, test condition A
13	Subgroups 2 and 3 of table I herein ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ± 500 nA dc or ±100 percent of initial value, whichever is greater. $\Delta r_{DS(ON)1}$ = ±20 percent of initial value. $\Delta V_{GS(TH)1}$ = ±20 percent of initial value.	Subgroup 2 of table I herein ΔI_{GSSF1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{GSSR1} = ±20 nA dc or ±100 percent of initial value, whichever is greater. ΔI_{DSS1} = ± 500 nA dc or ±100 percent of initial value, whichever is greater. $\Delta r_{DS(ON)1}$ = ±20 percent of initial value. $\Delta V_{GS(TH)1}$ = ±20 percent of initial value.
17	For TO-257AA (T3 and D5 suffixes) and TO-276AA (U3 suffix) packages: Method 1081 of MIL-STD-750 (see 4.3.4), Endpoints: Subgroup 2 of table I herein.	For TO-257AA (T3 and D5 suffixes) and TO-276AA (U3 suffix) packages: Method 1081 of MIL-STD-750 (see 4.3.4), Endpoints: Subgroup 2 of table I herein.

(1) At the end of the test program, I_{GSSF1}, I_{GSSR1}, and I_{DSS1} are measured.
(2) An out-of-family program to characterize I_{GSSF1}, I_{GSSR1}, I_{DSS1} and $V_{GS(th)1}$ shall be invoked
(3) Shall be performed anytime after temperature cycling, screen 3a; JANTXV does not need to be repeated in screening requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

* 4.3.1 Gate stress test. Apply V_{GS} = ±24 V minimum for t = 250 µs minimum.

4.3.2 Single pulse avalanche energy (E_{AS}).

a. Peak current ..... $I_{AS} = I_{D2}$.

b. Inductance:..... $\left[\frac{2E_{AS}}{(I_{D2})^2}\right]\left[\frac{V_{BR} - V_{DD}}{V_{BR}}\right]$ mH minimum.

c. Gate to source resistor (R_{GS})..... $25 \leq R_{GS} \leq 200\ \Omega$.

d. Supply voltage (V_{DD})..... V_{DD} = 25 V dc, up to rated V_{DS}.

e. Peak gate voltage (V_{GS}) ..... 20 V, up to maximum rated V_{GS}.

f. Initial case temperature ..... T_C = +25°C +10°C, -5°C.

g. Number of pulses to be applied..... 1 pulse minimum.

4.3.3 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3161 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{MD}, t_{SW}, (and V_H where appropriate). See table III, group E, subgroup 4 herein.

4.3.4 Dielectric withstanding voltage. Not applicable to the U3C and U3CE packages.

a. Magnitude of test voltage……700V dc (T3), 800V dc (D5), 1000V dc (U3).

b. Duration of application of test voltage……...15 seconds (min).

c. Points of application of test voltage……All leads to case (bunch connection).

d. Method of connection……Mechanical

e. Kilovolt-ampere rating of high voltage source……..1,200 V,1.0 mA (min).

f. Maximum leakage current……... 1.0 mA (T3 and D5), 0.01 mA (U3).

g. Voltage ramp up time……500 V/second.

4.3.5 PIND. Not applicable in screening when devices are processed using alternative method and flow requirements approved by the qualifying activity, that includes incorporating the use of certified clean processing and silicone die coat. Instead, the PIND test performance shall be performed in group B3 and group C3, on a lot sample basis. PIND failures detected in group B or C will represent lot jeopardy and shall be evaluated for root cause and lot integrity.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIA (JANS) and table E-VIB (JANTXV) of MIL-PRF-19500, and as follows.

4.4.2.1 Quality level JANS (table E-VIA of MIL-PRF-19500).

Subgroup	Method	Condition
B3	1051	Test condition G, 100 cycles.
B3	2077	Scanning electron microscope (SEM).
B4	1042	Intermittent operation life, condition D, t_{on} = 30 seconds minimum.
B5	1042	Accelerated steady-state gate bias, condition B, V_{GS} = rated; T_A = +175°C, t = 24 hours minimum; or T_A = +150°C, t = 48 hours minimum.
B5	1042	Accelerated steady-state reverse bias, condition A, V_{DS} = rated; T_A = +175°C, t = 120 hours minimum; or T_A = +150°C, t = 240 hours minimum.
B5	2037	Test condition D.

4.4.2.2 Quality level JANTXV (table E-VIB of MIL-PRF-19500).

Subgroup	Method	Condition
B2	1051	Test condition G, 25 cycles.
B3	1042	Intermittent operation life, condition D, t_{on} = 30 seconds minimum.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and as follows.

Subgroup	Method	Condition
* C2	2036	Test condition A; weight = 10 pounds, t = 15 s (not applicable for surface mount devices).
C5	3161	See 4.3.3, $R_{\theta JC}$ = 1.67 °C/W.
C6	1042	Intermittent operation life, condition D, t_{on} = 30 seconds minimum.

4.4.4 Group D inspection. Group D inspection shall be conducted in accordance with table E-VIII of MIL-PRF-19500 and table II herein.

4.4.5 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table III herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/ 2/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Condition		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Thermal impedance 3/	3161	See 4.3.3	$Z_{\theta JC}$			°C/W
Breakdown voltage drain to source	3407		$V_{(BR)DSS}$			
2N7647U3, T3, D5		Bias condition C, V_{GS} = 0 V, I_D = 1 mA dc		60		V dc
2N7648U3, T3, D5		Bias condition C, V_{GS} = 0 V, I_D = 1 mA dc		100		V dc
2N7649U3, T3, D5		Bias condition C, V_{GS} = 0 V, I_D = 1 mA dc		250		V dc
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, I_D = 1 mA dc	$V_{GS(TH)1}$	2.0	4.0	V dc
Gate current	3411	V_{GS} = +20 V dc, bias condition C, V_{DS} = 0 V	I_{GSSF1}		+100	nA dc
Gate current	3411	V_{GS} = -20 V dc, bias condition C, V_{DS} = 0 V	I_{GSSR1}		-100	nA dc
Drain current	3413	V_{GS} = 0 V dc, bias condition C, V_{DS} = 80 percent of rated V_{DS},	I_{DSS1}		1.0	µA dc
Static drain to source on-state resistance	3421	V_{GS} = 12 V dc, condition A, pulsed (see 4.5.1), I_D = I_{D2}	$r_{DS(ON)1}$			
2N7647U3					0.018	Ω
2N7647T3, 2N7647D5					0.019	Ω
2N7648U3					0.034	Ω
2N7648T3, 2N7648D5					0.035	Ω
2N7649U3					0.110	Ω
2N7649T3, 2N7649D5					0.110	Ω
Forward voltage	4011	V_{GS} = 0 V dc, condition A, I_D = I_{D1}	V_{SD}		1.2	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/ 2/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Condition		Min	Max	
Subgroup 3						
High temperature operation		$T_C = T_J = +125°C$				
Gate current	3411	$V_{GS} = \pm 20$ V dc, bias condition C, $V_{DS} = 0$ V	I_{GSS2}		±200	nA dc
Drain current	3413	$V_{GS} = 0$ V dc, bias condition C, V_{DS} = 80 percent of rated V_{DS}	I_{DSS2}		10	µA dc
Static drain to source on-state resistance	3421	V_{GS} = 12 V dc, condition A, pulsed (see 4.5.1), $I_D = I_{D2}$	$r_{DS(ON)3}$			
2N7647U3					0.036	Ω
2N7647T3, 2N7647D5					0.038	Ω
2N7648U3					0.061	Ω
2N7648T3, 2N7648D5					0.063	Ω
2N7649U3, 2N7649U3C					0.200	Ω
2N7649T3, 2N7649D5					0.215	Ω
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, I_D = 1 mA dc	$V_{GS(TH)2}$	1.0		V dc
Low temperature operation		$T_C = T_J = -55°C$				
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS(TH)3}$, I_D = 1 mA dc	$V_{GS(TH)3}$		5.0	V dc
Subgroup 4						
Forward transconductance	3475	$I_D = I_{D2}$, V_{DD} = 15 V dc (see 4.5.1)	g_{FS}			
2N7647U3, T3, D5				20		S
2N7648U3, T3, D5				14		S
2N7649U3				9		S
2N7649T3, D5				10		S
Switching Time Tests	3472	$I_D = I_{D1}$, V_{GS} = 12 V dc, R_G = 7.5 Ω, V_{DD} = 50 percent rated V_{DS}				
Turn-On Delay Time			td(on)			
2N7647U3, T3, D5					20	ns
2N7648U3, T3, D5					25	ns
2N7649U3, T3, D5					25	ns
Rise Time			tr			
2N7647U3, T3, D5					40	ns
2N7648U3, 2N7648U3C					56	ns
2N7648T3, 2N7648D5					35	ns
2N7649U3, T3, D5					25	ns
Turn-Off Delay Time			td(off)			
2N7647U3, T3, D5					45	ns
2N7648U3, 2N7648U3C					38	ns
2N7648T3, 2N7648D5					45	ns
2N7649U3, T3, D5					50	ns
Fall Time			tf			
2N7647U3, T3, D5					30	ns
2N7648U3, 2N7648U3C					27	ns
2N7648T3, 2N7648D5					30	ns
2N7649U3, T3, D5					25	ns

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/ 2/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Condition		Min	Max	
Subgroup 5						
Safe operating area test	3474	See figure 7, tp = 10 ms min. V_{DS} = 80 percent of max. rated V_{DS}				
Electrical measurements		See table I, subgroup 2				
Subgroup 6						
Not applicable						
Subgroup 7						
Gate charge	3471	Condition B, $I_D = I_{D1}$, V_{GS} = 12 V dc V_{DD} = 50 percent of rated V_{DS}				
On-state gate charge and turn-off gate charge			Q_G			
2N7647U3, T3, D5					45	nC
2N7648U3, 2N7648U3C					48	nC
2N7648T3, 2N7648D5					44	nC
2N7649U3, T3, D5					34	nC
Gate to source charge (turn-on and turn-off)			Q_{GS}			
* 2N7647U3, T3, D5					14	nC
2N7648U3, 2N7648U3C					25	nC
2N7648T3, 2N7648D5					20	
2N7649U3, T3, D5					13	nC
Gate to drain charge (turn-on and turn-off)			Q_{GD}			
2N7647U3, T3, D5					11	nC
2N7648U3, 2N7648U3C					9	nC
2N7648T3, 2N7648D5					12	nC
2N7649U3, T3, D5					13	nC
Reverse recovery time	3473	Condition A, di/dt = -100 A/µs, $V_{DD} \leq$ 50 V, $I_D = I_{D1}$	t_{rr}			
2N7647U3, T3, D5					130	ns
2N7648, U3, T3, D5					210	ns
2N7649U3, T3, D5					335	ns

1/ For sampling plan, see MIL-PRF-19500.
2/ Unless otherwise specified, electrical characteristics for the U3 suffix devices are identical to the U3C and U3CE suffix devices.
3/ For end-point measurements, this test is required for the following subgroups:
Group B, subgroups 2 and 3 (JANTXV).
Group B, subgroups 3 and 4 (JANS).
Group C, subgroup 2 and 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

TABLE II. Group D inspection.

Inspection	MIL-STD-750		Symbol	Pre-irradiation limits		Post-irradiation limits		Unit
1/ 2/ 3/	Method	Conditions		R and F		R and F		
				Min	Max	Min	Max	
Subgroup 1								
Not applicable								
Subgroup 2		T_C = + 25°C						
Steady-state total dose irradiation (V_{GS} bias) 4/	1019	Condition A, V_{GS} = 12 V; V_{DS} = 0						
Steady-state total dose irradiation (V_{DS} bias) 4/	1019	Condition A, V_{GS} = 0; V_{DS} = 80 percent of rated V_{DS}(pre-irradiation)						
End-point electricals:								
Breakdown voltage, drain to source	3407	Bias condition C, V_{GS} = 0; I_D = 1 mA	$V_{(BR)DSS}$					
2N7647U3, T3, D5				60		60		V dc
2N7648U3, T3, D5				100		100		V dc
2N7649U3, T3, D5				250		250		V dc
Gate to source voltage (threshold)	3403	$V_{DS} \geq V_{GS}$, I_D = 1 mA	$V_{GS(th)1}$	2.0	4.0	2.0	4.0	V dc
Gate current	3411	Bias condition C, V_{GS} = +20 V; V_{DS} = 0	I_{GSSF1}		100		100	nA dc
Gate current	3411	Bias condition C, V_{GS} = -20 V; V_{DS} = 0	I_{GSSR1}		-100		-100	nA dc
Drain current	3413	Bias condition C, V_{GS} = 0 V_{DS} = 80 percent of rated V_{DS} (pre-irradiation)	I_{DSS}		1.0		1.0	µA dc
Static drain to source on-state voltage	3405	V_{GS} = 12 V; I_D = I_{D2} condition A, pulsed (see 4.5.1)	$V_{DS(on)}$					
2N7647U3					0.522		0.522	V dc
2N7647T3, 2N7647D5 5/					0.532		0.532	V dc
2N7648U3					0.748		0.748	V dc
2N7648T3, 2N7648D5 5/					0.770		0.770	V dc
2N7649U3, T3, D5 5/					1.155		1.155	V dc
Forward voltage source drain diode	4011	Bias condition A, V_{GS} = 0; I_D = I_{D1}	V_{SD}		1.2		1.2	V dc

1/ For sampling plan, see MIL-PRF-19500. Unless otherwise specified, electrical characteristics for the U3 suffix devices are identical to the U3C and U3CE suffix devices.
2/ Group D qualification may be performed prior to lot formation. Wafers qualified to these group D QCI requirements may be used for any other specification sheets utilizing the same die design.
3/ At the manufacturer's option, group D samples need not be subjected to the screening tests, and may be assembled in its qualified package or in any qualified package that the manufacturer has data to correlate the performance to the designated package.
4/ Separate samples shall be pulled for each bias.
5/ Group D samples are built and tested in T0-3 packages. The equivalent pre-radiation and post radiation limit for $V_{DS(on)}$ in the T0-3 package is 0.792Vdc for the 2N7648U3, U3C, T3, D5 devices. For the 2N7647U3, U3C it is 0.580Vdc and for the 2N7647T3, D5 it is 0.560Vdc. For the 2N7649U3, U3CE, T3, D5, it is 1.155V dc.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

TABLE III. Group E inspection (all quality levels) for qualification or re-qualification only.


Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
Subgroup 1			45 devices c = 0
Temperature cycling	1051	-55°C to +150°C, 500 cycles	
Hermetic seal Fine leak Gross leak	1071	As applicable.	
Electrical measurements		See table I, subgroup 2 herein.	
Subgroup 2 1/			45 devices c = 0
Steady-state gate bias	1042	Condition B, 1,000 hours.	
Electrical measurements		See table I, subgroup 2 herein.	
Steady-state reverse bias	1042	Condition A, 1,000 hours.	
Electrical measurements		See table I, subgroup 2 herein.	
* Subgroup 3			
Not applicable			
Subgroup 4			Sample size N/A
Thermal impedance curves		See MIL-PRF-19500.	
Subgroup 5			3 devices c = 0
Barometric Pressure	1001	Required for 2N7649T3, D5, U3, U3CE only. Test condition C, $V_{ISO} = V_{DS}$, $I_{(ISO)}$ = .25 mA (max)	
Subgroup 7			3 devices c = 0
Resistance to soldering heat T3, D5 U3, U3CE	2031	 Condition A and B Condition B and I	
Subgroup 10			22 devices c = 0
Commutating diode for safe operating area test procedure for measuring dv/dt during reverse recovery of power MOSFET transistors or insulated gate bipolar transistors	3476		
Subgroup 11			3 devices
SEE 2/ 3/		See MIL-STD-750 method 1080 and 6.2.	

1/ A separate sample for each test shall be pulled.
2/ Group E qualification of SEE testing may be performed prior to lot formation. Qualification may be extended to other specification sheets utilizing the same structurally identical die design.
3/ Device qualification to a higher level linear energy transfer (LET) is sufficient to qualify all lower level LETs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

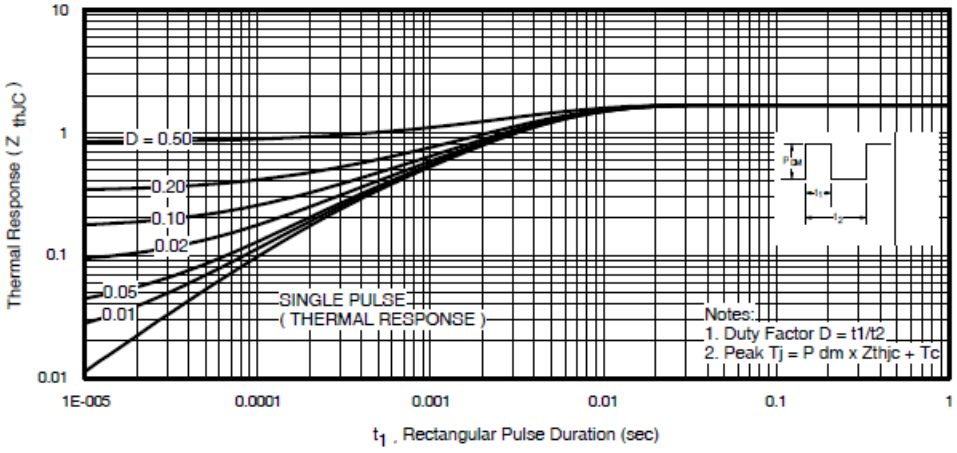


2N7647U3, 2N7647U3C, 2N7647U3CE.

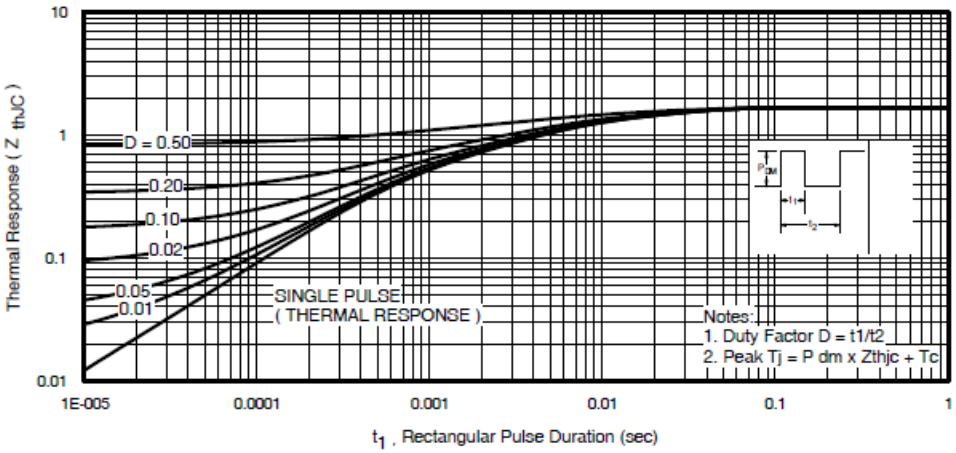


2N7647T3, 2N7647D5

FIGURE 5. Thermal response curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

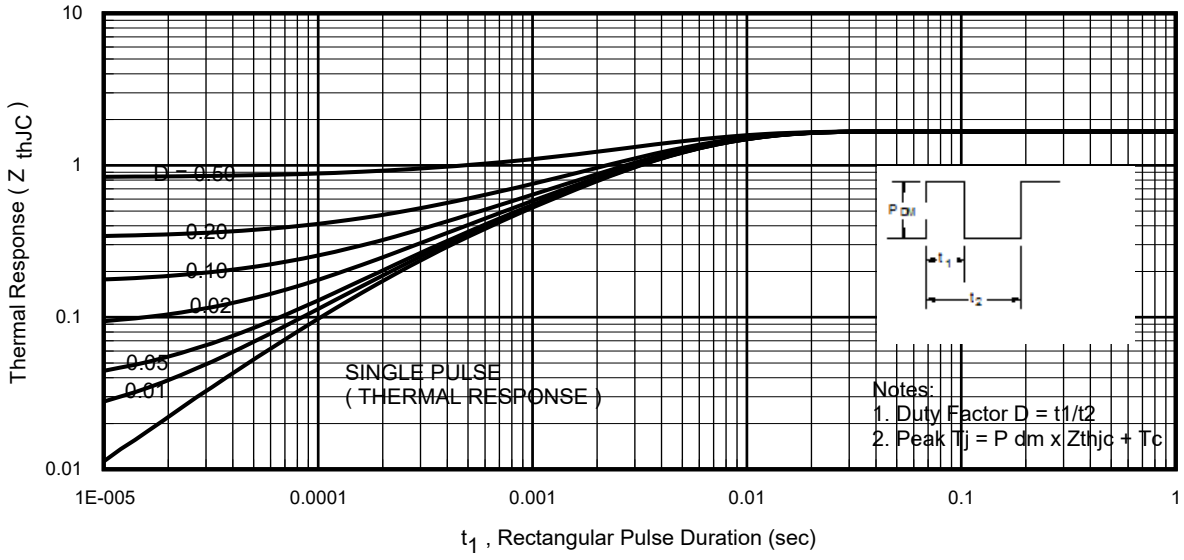


2N7648U3, 2N7648U3C, 2N7648U3CE.

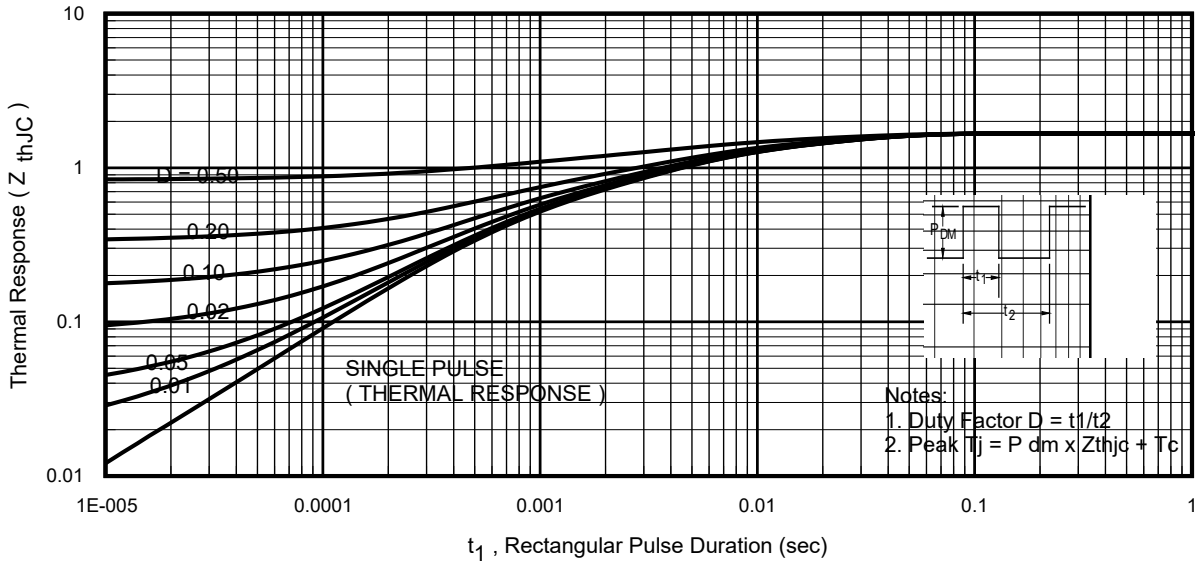


2N7648T3, 2N7648D5

FIGURE 5. Thermal response curve - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

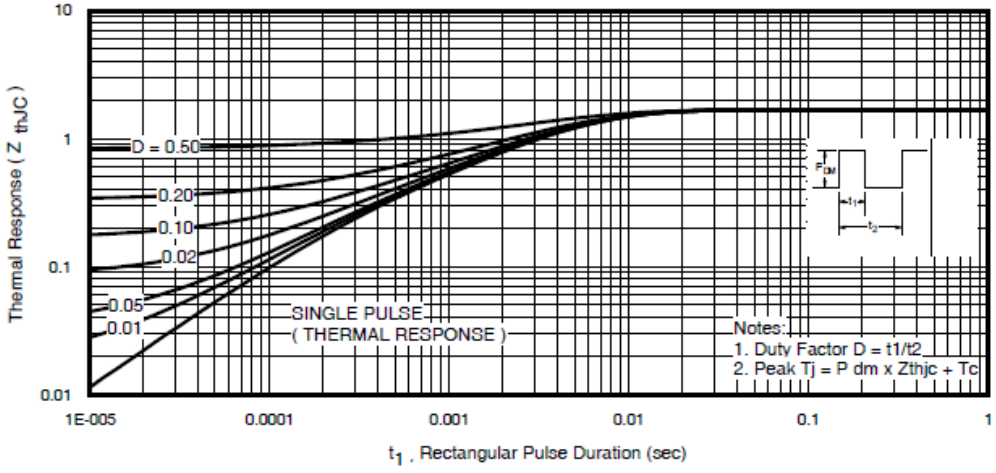

2N7649U3, 2N7649U3C, 2N7649U3CE.

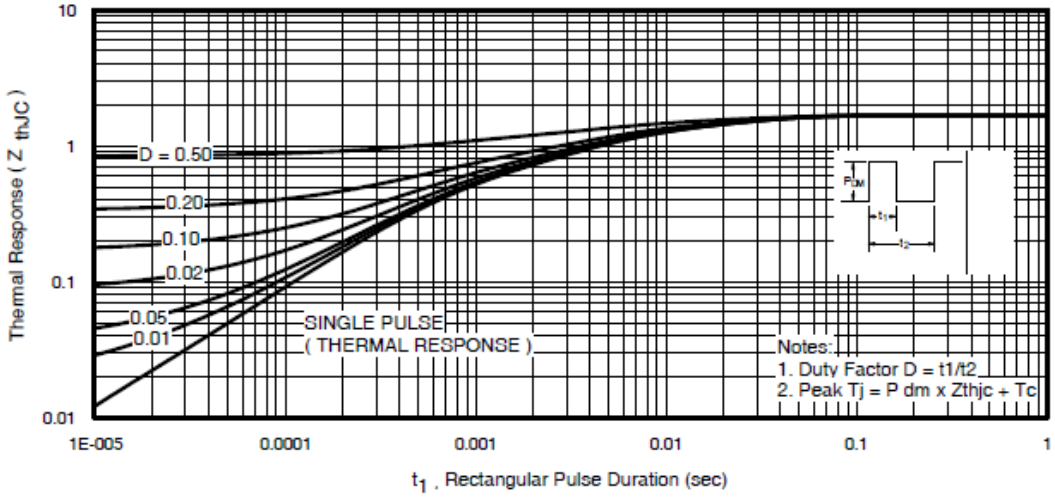


2N7649T3, 2N7649D5

FIGURE 5. Thermal response curve - continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

Maximum Current Rating

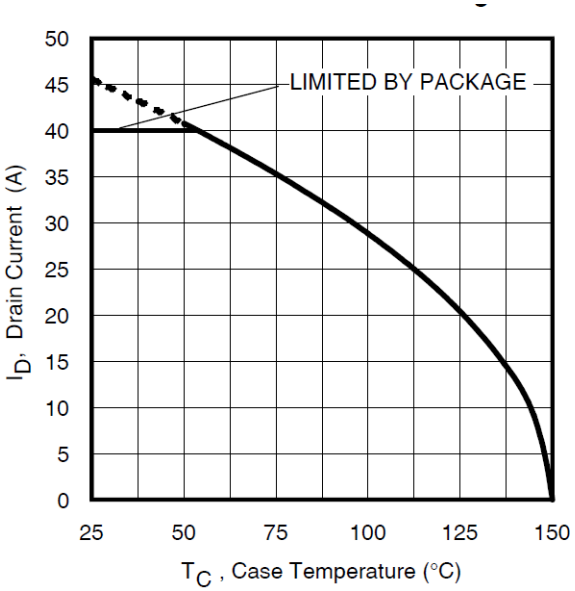


2N7647U3, 2N7647U3C, 2N7647U3CE

Maximum Current Rating

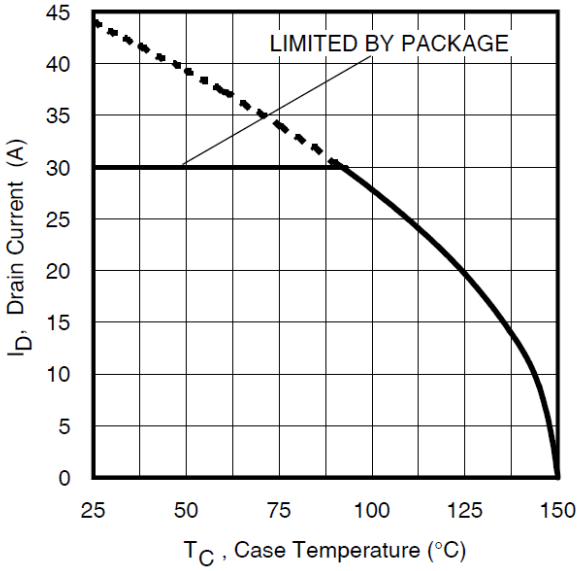


2N7647T3, 2N7647D5

Maximum Current Rating

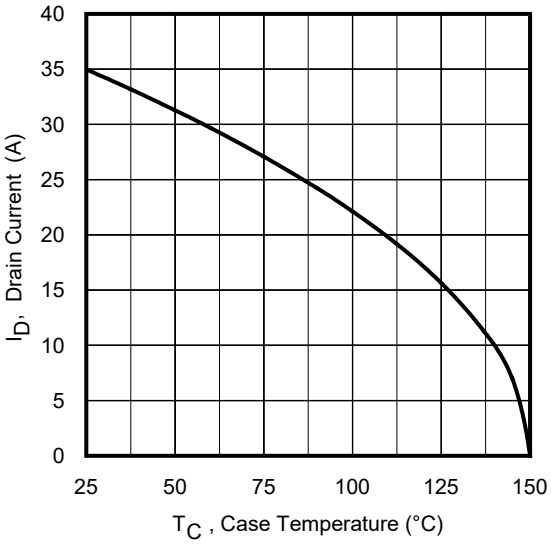

2N7648U3, 2N7648U3C, 2N7648U3CE


Maximum Current Rating

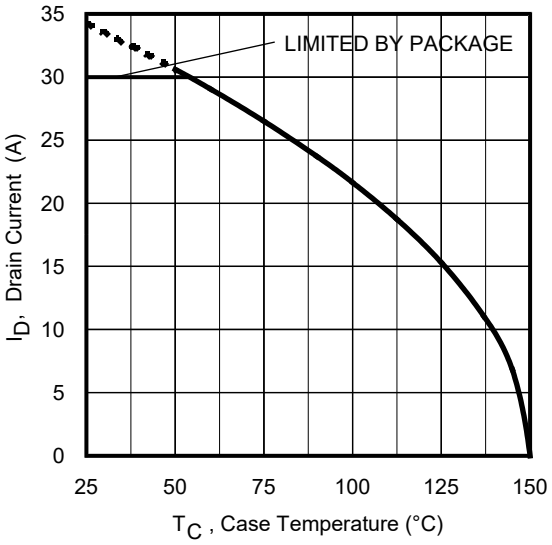

2N7648T3, 2N7648D5

FIGURE 6. Maximum drain current versus case temperature graphs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

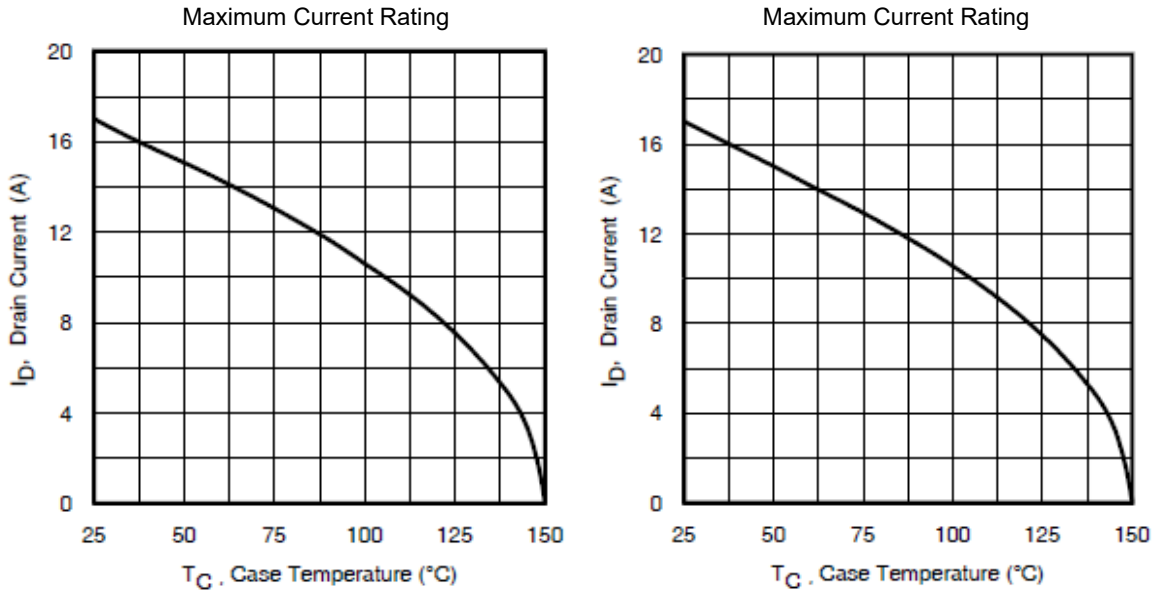


2N7649U3, 2N7649U3C, 2N7649U3CE


2N7649T3, 2N7649D5

FIGURE 6. Maximum drain current versus case temperature graphs - continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

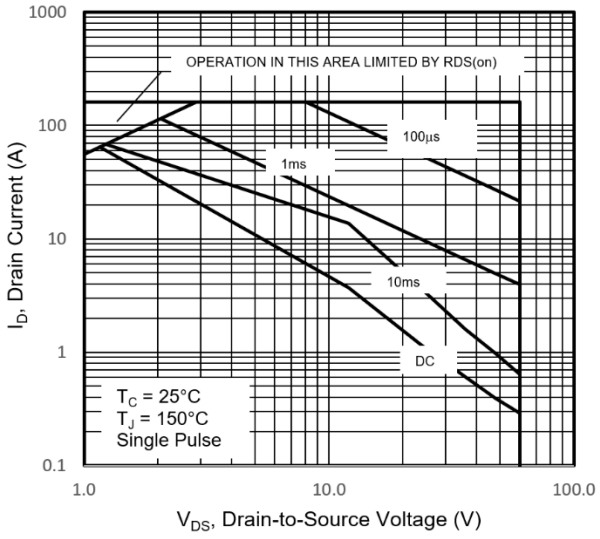


2N7647U3, 2N7647U3C, 2N7647U3CE

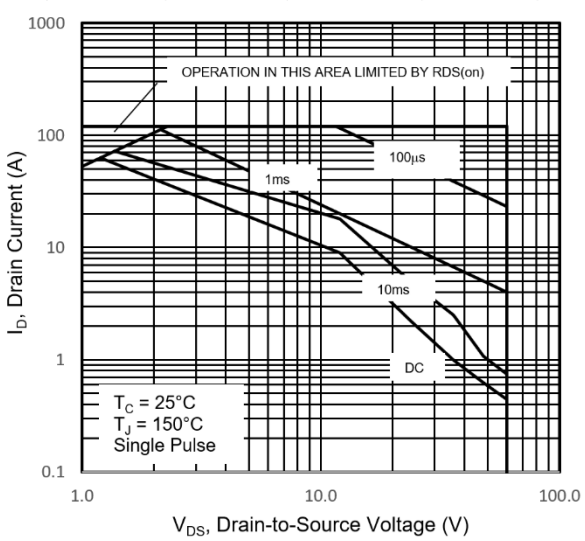

2N7647T3, 2N7647D5

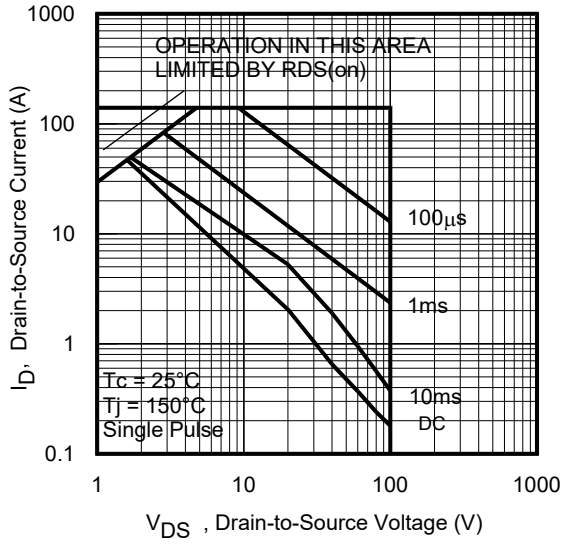


2N7648U3, 2N7648U3C, 2N7648U3CE

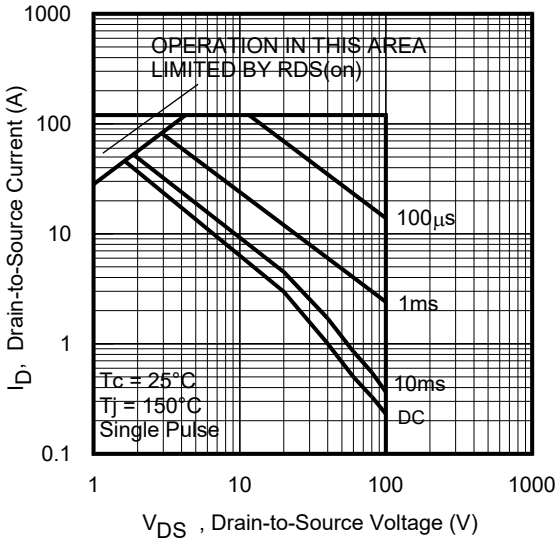


2N7648T3, 2N7648D5

FIGURE 7. Safe operating area graph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

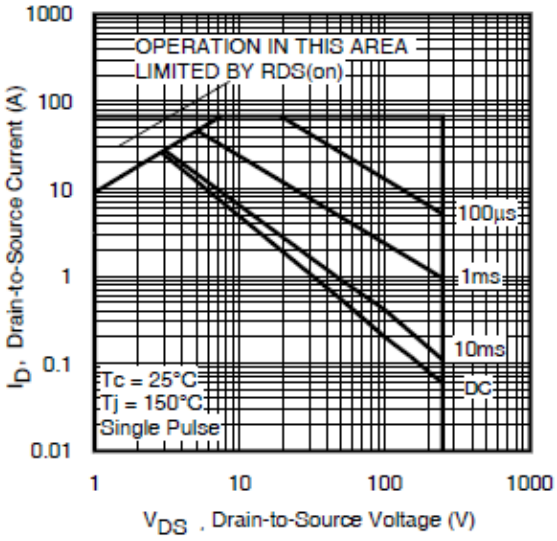

2N7649U3, 2N7649U3C, 2N7649U3CE

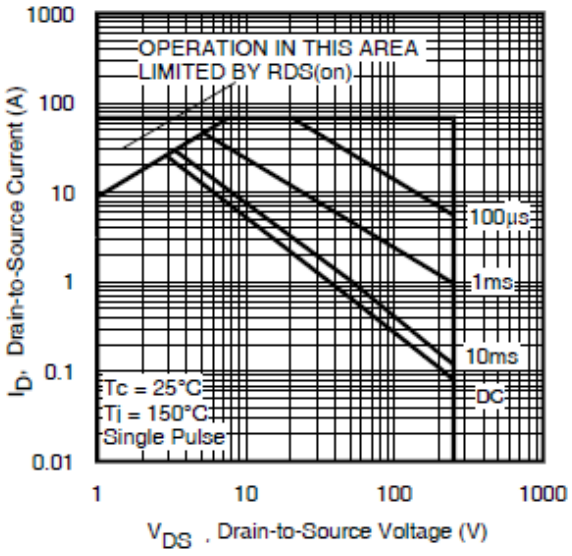

2N7649T3, 2N7649D5

FIGURE 7. Safe operating area graph - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete PIN, see 1.5 and 6.6.

e. For acquisition of RHA designated devices, table II, subgroup 1 testing of group D herein is optional. If subgroup 1 is desired, it should be specified in the contract or order.

f. If SEE testing data is desired, it should be specified in the contract or order.

g. If specific SEE characterization conditions are desired (see section 6.7 and table IV), manufacturer's cage code should be specified in the contract or order.


6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

6.4 Substitution information. Devices covered by this specification are substitutable for the manufacturer's and user's Part or Identifying Number (PIN) (without JAN and RHA prefix). This information in no way implies that manufacturer's PINs are substitutable for the military PIN.

Preferred types military PIN	Commercial PIN
2N7647U3	IRHNJ9A7034
2N7647U3C	IRHNJC9A7034
2N7647U3CE	IRHNKC9A7034
2N7647T3	IRHYS9A7034CM
2N7647D5	IRHYB9A7034CM
2N7648U3	IRHNJ9A7130
2N7648U3C	IRHNJC9A7130
2N7648U3CE	IRHNKC9A7130
2N7648T3	IRHYS9A7130CM
2N7648D5	IRHYB9A7130CM
2N7649U3	IRHNJ9A7234
2N7649U3C	IRHNJC9A7234
2N7649U3CE	IRHNKC9A7234
2N7649T3	IRHYS9A7234CM
2N7649D5	IRHYB9A7234CM

6.5 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

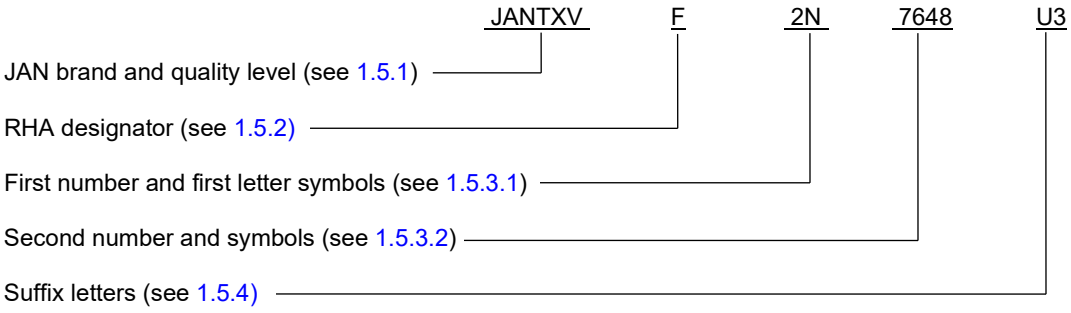

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

6.6 List of PINs. The following is a list of possible PINs (without JAN brand) available on this specification sheet.

JANTXVF2N7647U3	JANTXVF2N7647U3C	JANTXVF2N7647U3CE	JANTXVF2N7647T3	JANTXVF2N7647D5
JANTXVR2N7647U3	JANTXVR2N7647U3C	JANTXVR2N7647U3CE	JANTXVR2N7647T3	JANTXVR2N7647D5
JANSF2N7647U3	JANSF2N7647U3C	JANSF2N7647U3CE	JANSF2N7647T3	JANSF2N7647D5
JANSR2N7647U3	JANSR2N7647U3C	JANSR2N7647U3CE	JANSR2N7647T3	JANSR2N7647D5
JANTXVF2N7648U3	JANTXVF2N7648U3C	JANTXVF2N7648U3CE	JANTXVF2N7648T3	JANTXVF2N7648D5
JANTXVR2N7648U3	JANTXVR2N7648U3C	JANTXVR2N7648U3CE	JANTXVR2N7648T3	JANTXVR2N7648D5
JANSF2N7648U3	JANSF2N7648U3C	JANSF2N7648U3CE	JANSF2N7648T3	JANSF2N7648D5
JANSR2N7648U3	JANSR2N7648U3C	JANSR2N7648U3CE	JANSR2N7648T3	JANSR2N7648D5
JANTXVF2N7649U3	JANTXVF2N7649U3C	JANTXVF2N7649U3CE	JANTXVF2N7649T3	JANTXVF2N7649D5
JANTXVR2N7649U3	JANTXVR2N7649U3C	JANTXVR2N7649U3CE	JANTXVR2N7649T3	JANTXVR2N7649D5
JANSF2N7649U3	JANSF2N7649U3C	JANSF2N7649U3CE	JANSF2N7649T3	JANSF2N7649D5
JANSR2N7649U3	JANSR2N7649U3C	JANSR2N7649U3CE	JANSR2N7649T3	JANSR2N7649D5

The PIN is also available without a RHA designator.

6.7 Application data.

6.7.1 Manufacturer specific irradiation data. Each manufacturer qualified to this specification sheet has characterized its devices to the requirements of MIL-STD-750 method 1080 and as specified herein. Since each manufacturer's characterization conditions can be different and can vary by the version of method 1080 qualified to, the MIL-STD-750 method 1080 revision version date and conditions used by each manufacturer for characterization have been listed here (see table IV) for information only. SEE conditions and figures listed in section 6 are current of the date of this specification sheet, please contact the manufacturer for the most recent conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturers characterization conditions.

Manufacturers CAGE	Inspection 1/	MIL-STD-750		Sample plan
		Method	Conditions	
69210 (Data is based on a test report date of July 2018, date code of 1620)	SEE 2/	1080	See MIL-STD-750 method 1080 and figure 8.	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7648U3, 2N7648T3, 2N7648D5		Surface LET = 37 MeV-cm2/mg ±5%, range = 50 µm ±7.5%, Kr ion energy = 417 MeV ±7.5% In-situ bias conditions: V_{DS} = 100 V and V_{GS} = -15V (Typical 4.98 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE 2/	1080	See MIL-STD-750 method 1080	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7648U3, 2N7648T3, 2N7648D5		Surface LET = 59.8 MeV-cm2/mg ±5%, range = 60 µm ±7.5%, Xe ion energy = 753 MeV ±7.5% In-situ bias conditions: V_{DS} = 100 V and V_{GS} = -10V; Typical 5.85 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
69210	SEE 2/	1080	See MIL-STD-750 method 1080 and figure 8	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7648U3, 2N7648T3, 2N7648D5		Surface LET = 89.75 MeV-cm2/mg ±5%, range = 82.25 µm ±7.5%, Au ion energy = 1515 MeV ±7.5% In-situ bias conditions: V_{DS} = 100 V and V_{GS} = -3V (Typical 7.7 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

Manufacturers CAGE	Inspection	MIL-STD-750		Sample plan
		Method	Conditions	
69210 (Data is based on a test report date of October 2017, date code of 1620)	SEE 2/	1080	See MIL-STD-750 method 1080 and figure 8	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7649U3, 2N7649T3, 2N7649D5		Surface LET = 35.7 MeV-cm2/mg ±5%, range = 58.8 µm ±10%, Kr ion energy = 486 MeV ±5% In-situ bias conditions: V_{DS} = 250 V and V_{GS} = -15V (Typical 5.79 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE 2/	1080	See MIL-STD-750 method 1080	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7649U3, 2N7649T3, 2N7649D5		Surface LET = 58.5 MeV-cm2/mg ±5%, range = 68.9 µm ±7.5%, Xe ion energy = 865 MeV ±5% In-situ bias conditions: V_{DS} = 250 V and V_{GS} = -10 V; Typical 6.71 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
69210	SEE 2/	1080	See MIL-STD-750 method 1080 and figure 8	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7649U3, 2N7649T3, 2N7649D5		Surface LET = 88.6 MeV-cm2/mg ±5%, range = 90.3 µm ±5%, Au ion energy = 1685 MeV ±5% In-situ bias conditions: V_{DS} = 250 V and V_{GS} = -1 V (Typical 8.55 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.


TABLE IV. Manufacturers characterization conditions - continued.

Manufacturers CAGE	Inspection	MIL-STD-750		Sample plan
		Method	Conditions	
69210 (Data is based on a test report date of January 2019, date code of 1733)	SEE 2/	1080	See MIL-STD-750 method 1080 and figure 8	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7647U3, 2N7647T3, 2N7647D5		Surface LET = 38 MeV-cm2/mg ±5%, range = 43 µm ±7.5%, Kr ion energy = 355 MeV ±7.5% In-situ bias conditions: V_{DS} = 60 V and V_{GS} = -15V (Typical 4.23 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE 2/	1080	See MIL-STD-750 method 1080	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7647U3, 2N7647T3, 2N7647D5		Surface LET = 60 MeV-cm2/mg ±5%, range = 60 µm ±10%, Xe ion energy = 753MeV ±7.5% In-situ bias conditions: V_{DS} = 60 V and V_{GS} = -10 V; (Typical 5.84 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE 2/	1080	See MIL-STD-750 method 1080 and figure 8	3 devices
	Pre SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
	SEE irradiation		Fluence = 3E5 ±20 percent ions/cm^2 Flux = 4E3 to 4E4 ions/cm^2/sec, temperature = 25 ±5°C	
	2N7647U3, 2N7647T3, 2N7647D5		Surface LET = 90 MeV-cm2/mg ±5%, range = 82 µm ±7.5%, Au ion energy = 1515 MeV ±10% In-situ bias conditions: V_{DS} = 60 V and V_{GS} = -3V (Typical 7.69 MeV/Nucleon at Texas A & M Cyclotron)	
	Post SEE Electrical measurements		I_{GSSF1}, I_{GSSR1}, and I_{DSS1} in accordance with table I, subgroup 2	
Upon qualification, all manufacturers will provide the verification test conditions to be added to this table.				


1/ Unless otherwise specified, electrical characteristics for the U3 suffix devices are identical to the U3C, U3E, and U3CE suffix devices.

2/ I_{GSSF1}, I_{GSSR1}, and I_{DSS1} parameters were examined before and following SEE irradiation to determine acceptability for each bias conditions. Other test conditions in accordance with table I, subgroup 2, may be performed at the manufacturer's option.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

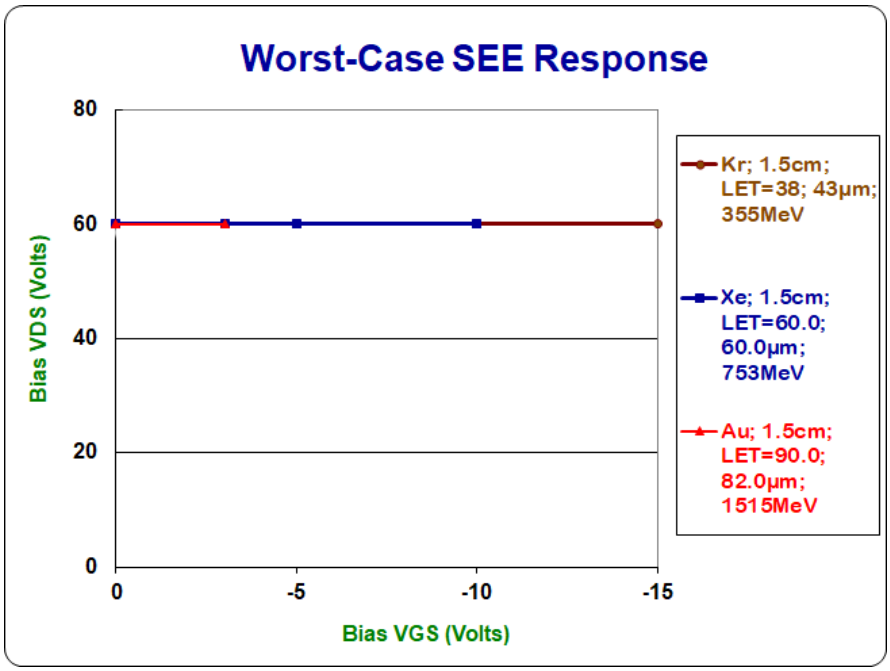


2N7647U3, 2N7647U3C, 2N7647U3CE, 2N7647T3, 2N7647D5

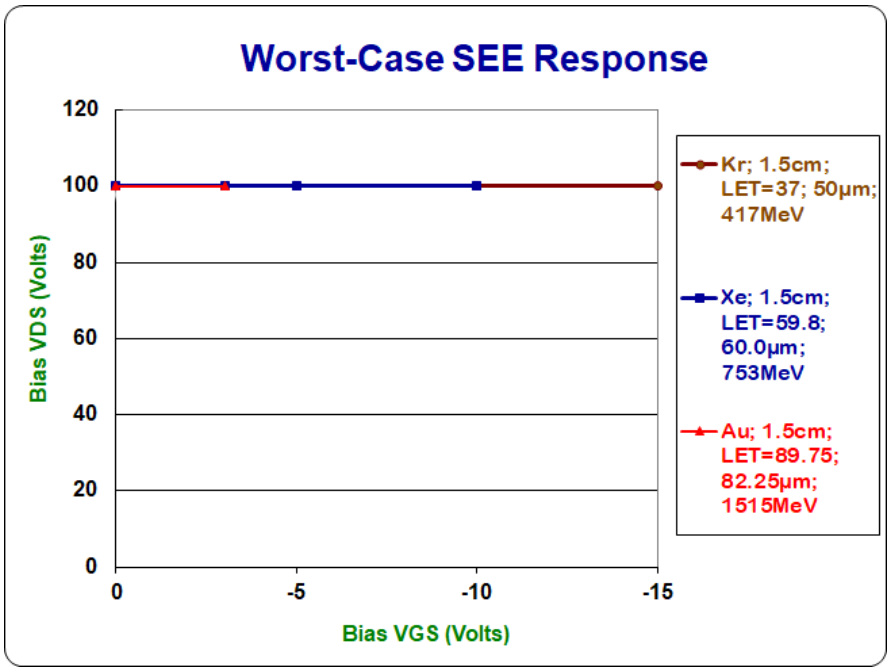

2N7648U3, 2N7648U3C, 2N7648U3CE, 2N7648T3, 2N7648D5

FIGURE 8. SEE safe operating area graph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.

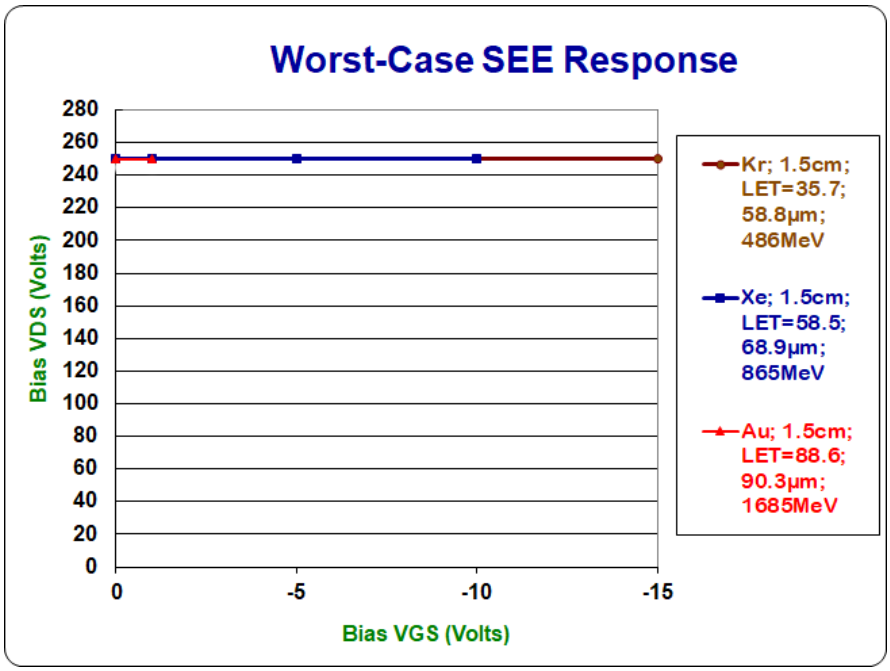

2N7649U3, 2N7649U3C, 2N7649U3CE, 2N7649T3, 2N7649D5

FIGURE 8. SEE safe operating area graph – continued.

6.8 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@dla.mil or by facsimile (614) 692-6939 or DSN 850-6939.

6.9 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85
NASA - NA
DLA - CC

Review activity:
Army - AV, MI
Air force - 19

Preparing activity:
DLA - CC

(Project 5961-2025-061)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:55Z
Check the source to verify that this is the current version before use.