A-A-1355
January 14, 1980

COMMERCIAL ITEM DESCRIPTION

WRENCH, IGNITION, DOUBLE HEAD, OPEN END, 15° AND 60° HEADS


The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification GGG-W-636.

This commercial item description covers individual wrenches and wrench sets suitable for hexagonal and square-headed bolts and nuts, assigned National Stock Numbers (NSN's) as listed below.

Salient characteristics:

Material: Steel, Rockwell C hardness of 40 minimum, 55 maximum. Powdered metal not acceptable.
Finish: Chromium plated. Both faces of each head shall be bright and have a maximum roughness height value of 30 microinches (A.A.).
Marking: Marked in a plain and permanent manner with wrench opening size on the faces or on the handle as close to the heads as practicable and with manufacturer's name or trademark.
Wrench opening: Sized to pass the gaging requirements of Federal Standard No. 346.
Chamfer: Tips chamfered or rounded to eliminate burrs.

National Stock Number	Wrench opening (distance across flats) 15° (Inches)	Wrench opening (distance across flats) 60° (Inches)	Width of head (maximum) (Inches)	Thickness of head (maximum) (Inches)	Overall length (minimum) (Inches)	Test (minimum) (In/lb)
5120-00-277-3414	13/64	15/64	1/2	7/64	3	40
5120-00-277-8308	7/32	1/4	1/2	7/64	3	40
5120-00-277-8310	15/64	13/64	1/2	7/64	3	40
5120-00-277-8309	1/4	7/32	1/2	7/64	3	40
5120-00-277-8311	9/32	5/16	5/8	5/32	3-1/2	65
5120-00-277-8312	5/16	9/32	5/8	5/32	3-1/2	65
5120-00-277-8313	11/32	3/8	3/4	5/32	3-3/4	110
5120-00-277-8314	3/8	11/32	3/4	5/32	3-3/4	110

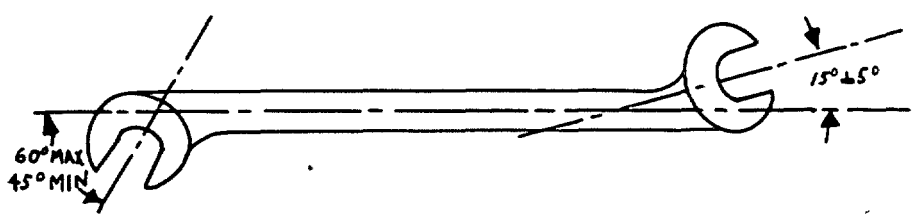

Ignition wrench

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Wrench set: NSN 5120-00-962-7580 includes one each of the above wrench sizes furnished in a plastic wrap or roll as follows:

Designed to contain wrenches in individual pockets.
Fabricated of vinyl plastic or cloth duck material.
Pockets sized to fit wrenches.
Wrenches easily removable and replaceable in the pockets.
Roll furnished with a permanently attached tie strap or buckle and strap for securing neatly.
Strap of cotton; fungus and mildew resistant treated.
Body 0.018 inch thick (± 0.001 inch) plastic, color optional.
Pockets a minimum of 0.012 inch thick with a matte clear (40 to 50 percent clear) finish.
Plastic flame retardant.
Body of each wrap or roll permanently and legibly marked with the NSN of the wrench set.

Workmanship. Wrench shall be free from rust, burrs, fins, nodules, and other defects which may impair serviceability, durability, or appearance. The edges and corners of the wrench shall be clearly defined and smoothly finished.

The issue of Federal Standard No. 346 in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. Each wrench shall be preserved and packaged in accordance with normal commercial practice and packed to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

Federal Standards are available from General Services Administration, Specification Sales, Building 197 (Washington Navy Yard), Washington, DC 20407.

GSA DC-01003476

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.