# COMMERCIAL ITEM DESCRIPTION

## GRASS HOOK (SCYTHE TYPE)

The General Services Administration has authorized the use of this commercial item description in Preference Federal Specification GGG-G-670, Type I, Class 2, Style B.

This description covers right-hand oriented hooks suitable for cutting or slashing dense growths of grass and light weeds.

Salient characteristics:

The short handle, medium duty, scythe type grass hook shall be similar to figure I with dimensions in accordance with Table I.

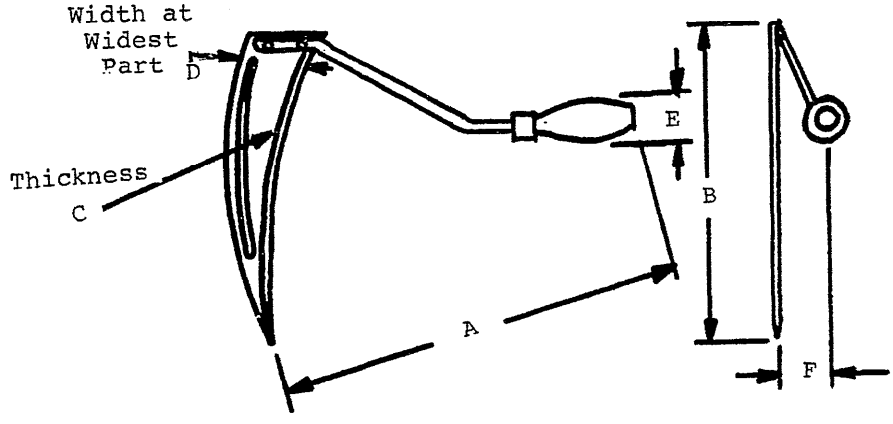


TABLE I

| A (Min. In) | B (Min. In) | C (Min. In) | D (Min. In) | E (Min. In) | F (Min. In) |
|---|---|---|---|---|---|
| 16 | 11 | 0.055 | 1-7/8 | 1-1/4 | 1-3/8 |

Blade. The high carbon steel or alloy steel blade shall be heat treated to a Rockwell C hardness of 45 to 55 in accordance with ASTM E 18. The cutting edge shall be uniformly bevel ground to a keen sharpness.

Reinforcement. The back edge of the blade shall be flanged or upset. Two-thirds of the blade near the back edge shall be beaded or raised.

Shank. The shank shall be fabricated from malleable iron, reinforced stamped steel or forged steel.

FSC 3750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Offset. The shank shall be bent to offset the handle with a minimum knuckle clearance as indicated by dimension F in table I.

Shank insertion. When the shank is inserted into the handle, the connection shall be reinforced by a ferrule with a smoothly finished through rivet. The connection shall be permanent and secure.

Handle insertion. When the handle is inserted into the integral shank socket extension, the connection shall be secured by a smoothly finished through rivet.

Blade attachment. The blade shall be securely attached to the shank with screws or bolts and nuts. The blade shall be easily removable for the purpose of resharpening or replacement.

Handle. The handle shall have a round or oval cross section shaped to provide a secure comfortable handhold. The handle shall be smoothly finished and protected with a durable coating of paint, enamel, lacquer or varnish.

Metal finish. All metal surfaces shall be protected with a durable coating of paint, varnish, enamel or lacquer. The blade cutting edge shall be coated with clear varnish or lacquer.

Identification. The grass hook shall be permanently and legibly marked with the manufacturer's trademark or name.

Shank test. The blade shall be fixed and 6-pounds shall be applied to the handle for 30 seconds. The shank shall not have a permanent set of more than 1/8 inch.

Workmanship. The grass hook shall be free from defects which will impair durability or serviceability.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

This commercial item description does not cover all types, classes, grades, or sizes of the commodity indicated by the title, or those which are commercially available, but it is intended to cover the types normally procured to meet Federal requirements.

NOTE TO CONTRACTING OFFICER: The specification/commercial item description contains no warranty provisions and no commercial warranty is known to exist.

The commercial item certification clause is not required when this commercial item description is used for procurement.

Copies of ASTM E 18 are available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

MILITARY INTERESTS:

Custodian

Army - ME

User Activities

Navy - YD
Army - ME
Air Force - 99

CIVIL AGENCY COORDINATING ACTIVITY:

USDA - AFS

PREPARING ACTIVITY:

GSA - FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.