COMMERCIAL ITEM DESCRIPTION

FILING CABINET, STEEL, LEGAL AND LETTER SIZE, INSULATED

The General Services Administration has authorized the use of this commercial item description in preference to Federal specification AA-F-355

Salient characteristics

These characteristics concisely describe the essential physical and functional/performance features of the commercially available item

Design. The filing cabinet shall be designed for heavy duty use, and shall be of the general appearance shown in figure 1

Classes Class C - 1 hour fire resistance

Types Type I - 2 drawers
Type II - 4 drawers
Type III - 3 drawers

Sizes Size 1 - Legal size
Size 2 - Letter Size

Fire resistance Cabinets shall meet the requirements of Underwriters Laboratories, Inc standard UL 72 for Class 350 - 1 Hr insulated record containers

Drawers Minimum clear inside drawer dimensions shall be 10"H by 15"W by 24"D for Size 1 cabinets and 10"H by 12"W by 24"D for Size 2 cabinets Drawers shall be equipped with adjustable follower blocks Drawer suspensions shall be the side-arm type or cradle type with balls or ball bearing rollers and shall operate easily and smoothly Drawer stops shall be provided which allow removal of the drawer but shall prevent the drawer from dropping out of alignment or separating from the suspension when fully extended

Locks Cabinets shall be equipped with paracentric key operated locks allowing a minimum of 125 key changes Two keys shall be provided Activation of the locking mechanism shall securely lock all drawers

Finish The finish shall be textured or semigloss lacquer or baked enamel Colors shall match Fed Std No 595 black (27040), gray (26134) and parchment within the range delimited by (25686-26405) Alternatively the manufacturer may provide his commercial black gray or parchment finish subject to contracting officer approval

Caster base When specified in the contract, caster bases shall be provided Casters shall be not less than 1-3/8 inch diameter and not less than 7/8 inch wide

Identification label The identification label shall be white, with the contractor's name or trademark, contract or order number, National Stock Number, month and year of manufacturer legibly marked in permanent dark ink The label shall be affixed to the inside of the top drawer and shall not be removable by hand without defacement after being affixed for 4 hours

Workmanship The workmanship shall be of the quality to produce finished cabinets acceptable in appearance, function and serviceability and to prevent potential hazard to personnel or their clothing

Performance Cabinets shall meet the requirements of ANSI/BIFMA Standard X5 3-1981 for Vertical Files

Preservation, packaging, packing, labeling and marking Preservation, packaging, packing, labeling and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.


NOTES. The filing cabinets offer no tamper resistance and are not intended for storage of classified records.

Purchaser should specify the class, type, size and color of the cabinet required.


Color samples are obtainable from the Business Service Center, Office of Federal Supply and Services, General Services Administration, Washington, DC 20407 or from the Business Service Center in the nearest GSA Regional Office.

ANSI/BIFMA standard X5 3-1981 is obtainable from the American National Standards Institute, 1430 Broadway, New York, NY 10018

UL Standard and UL 72 are obtainable from Underwriters Laboratories, Inc , 333 Pfingsten Road, Northbrook, IL 60062

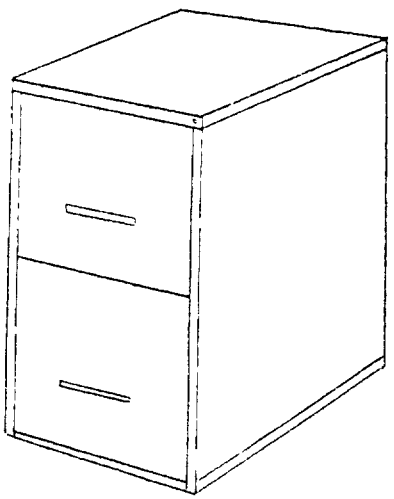

Type I Filing Cabinet
2 drawers

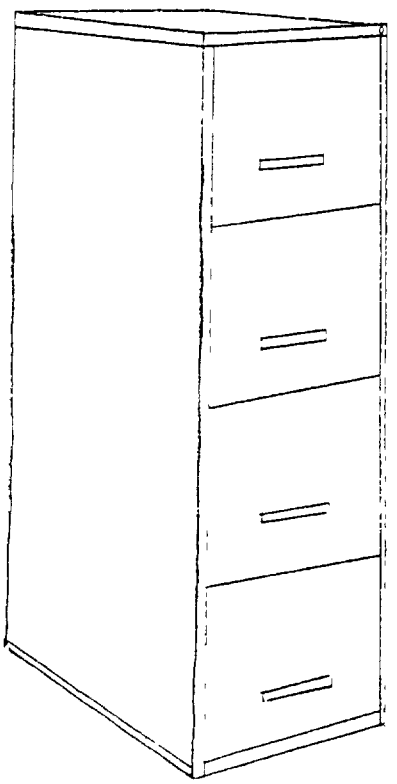

Type II Filing Cabinet
4 drawer

FIGURE 1

PREPARING ACTIVITY

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.