INCH-POUND

MIL-C-50329C (AR)
19 September 1991
SUPERSEDING
MIL-C-50329B (AR)
30 October 1979

MILITARY SPECIFICATION

CONVERTER, ELECTRONIC: 10549013

This specification is approved for use by the U. S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, tests, quality assurance provisions, and packaging for an electronic converter, hereinafter referred to as converter, used in Power Supply Subassembly PP6324/TPM-22, part of Radar Test Set AN/TPM-22, and in Power Supply Subassembly PP4812/VPS-2 part of Radar Set AN/VPS-2 (see 6.1)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

MIL-R-50325	Regulator, Voltage:	10548986
MIL-R-50326	Regulator, Voltage:	10548987
MIL-R-50327	Regulator, Voltage:	10548988
MIL-R-50328	Regulator, Voltage:	10549008
MIL-C-50330	Converter, DC/DC :	10549021

STANDARDS

MILITARY

MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 -	Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues shall be those cited in the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10549013 - Converter, Electronic

SPECIAL PACKAGING INSTRUCTION

PS10549O13 - Packaging of Converter, Electronic

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict *between* the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10549013, all associated drawings, and with all requirements specified in applicable specifications and standards. Subassemblies shall have met the requirements of the following specifications:

UNIT NO.	SUBASSEMBLY	DRAWING	SPECIFICATION
A1	DC/DC Converter	10549021	MIL-C-50330
A2	Voltage Regulator	10548986	MIL-R-50325
A3	Voltage Regulator	10548987	MIL-R-50326
A4	Voltage Regulator	10548988	MIL-R-50327
A5	Voltage Regulator	10549008	MIL-R-50328

3.2.1 General specifications. Where applicable, the converter shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances
b. Inorganic protective surface finishings
c. Part identification and marking
d. Workmanship

3.3 Environmental service conditions.

3.3.1 Vibration. The converter shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 40 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-40-10 hertz sweep time is 2 minutes 30 seconds ± 10%.

3.3.2 Shock. The converter shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The converter shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.3.3.2 Non-operating. The converter shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The converter shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 deg F and +155 deg F.

3.3.4.2 Non-operating (storage). The converter shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg F for a period of 24 hours and +160 deg F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The converter shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity In excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the converter.

3.5 Performance. The converter shall produce the outputs given in Table I when supplied with 24 $^{-2}_{+6}$ volts direct current (Vdc) between El (+) 1/ and E2 (-).

1/ The information in parentheses refers to the polarity applied to this terminal. This notation shall be applied throughout this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE I. Output characteristics

UNIT	TERMINALS	NOMINAL OUTPUT VOLTAGE AND CURRENT RANGE	MAXIMUM SHORT CIRCUIT OUTPUT CURRENT	MAXIMUM OUTPUT RIPPLE EXCLUDING SPIKES. INPUT VOLTAGE = 24 ± 0.24 Vdc	OUTPUT VOLTAGE REGULATION. INPUT VOLTAGE = 22 to 30 Vdc
A2	E73 (+) E74 (-) E71 (+) E72 (-)	15 ± 0.10 Vdc 0 to 1.00 ± 0.20 A	1.6 A	± 0.15 V pk-pk at 1.0 ± 0.20 A	± 0.15 V at 0 to 1.00 A
A3	E73 (+) E74 (-) E71 (+) E72 (-)	23 ± 0.10 Vdc 0 to 1.20 ± 0.20 A	1.8 A	0.23 V pk-pk at 1.2 ± 0.20 A	± 0.23 V at 0 to 1.20 A
A4	E73 (+) E74 (-) E71 (+) E72 (-)	33 ± 0.10 Vdc 0 to 0.75 ± 0.20 A	1.6 A	0.33 V pk-pk at 0.75 ± 0.20 A	± 0.33 V at 0 to 0.75 A
A5	E73 (+) E74 (-)	6.5 ± 0.20 Vdc 0.025 to 2.9 ± 0.20 A	4.0 A at room ambient and 4.7 A at specified temperature extremes	0.5 V pk-pk at 2.9 ± 0.20 A	± 0.10 V at 0.25 to 2.90 A
	E71 (+) E72 (-)	29.3 ± 0.30 Vdc 3.0 to 10.0 ± 0.2 A	16.0 A at room ambient and 17.5 A at specified temperature extremes	0.5 V pk-pk at 10 ± 0.2 A	± 0.60 V at 3.0 to 10.0 A

Source: https://assist.dla.mil -- Downloaded: 20260-22T20:21Z
Check the source to verify that this is the current version before use.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task) F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The Inspection set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any Inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F
b.	Relative humidity	90% RH-max.
c.	Pressure	28 to 32 inches of Hg

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three (3) electronic converters for inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. First article assemblies, components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table II (Functional Test) and Table III (Special Sampling) herein and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any of the stated requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogenous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.4.2 Examinations and tests.

4.4.2.1 **Components, assemblies and subassemblies.** All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 **Final acceptance Inspection.** Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

TABLE II. Functional tests
(100% Inspection)

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
101.	Electrical	3.4	4.7.2
102.	Performance	3.5	4.7.3
Minor:		None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.5 Special sampling. One converter out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table II and shall then meet the tests in Table III. a Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE III. Special sampling

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
103.	Vibration	3.3.1	4.7.1.1
104.	Shock	3.3.2	4.7.1.2
105.	Altitude	3.3.3	4.7*1.3
106.	Temperature	3.3.4	4.7.1.4
107.	Humidity	3.3.5	4.7.1.5
Minor:		None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table IV (Test equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE IV. Test equipment list

ITEM NUMBER	DESCRIPTION
1. Power Supply	Dc, 22-30 V, 30 A, regulated to ± 0.5%.
2. Voltmeter	Dc, 0-40 V, accuracy of ± 0.01%, 20,000 ohms/volt or greater.
3. Oscilloscope	Input sensitivity: 20mV/cm. Input impedance: 1 megohm. Vertical passband: dc to 1 MHz. Horizontal deflection: 5 us/cm.
4. Ammeter	Dc, 0-20 A, 1% accuracy.
5. Resistive load	Variable 0 to 50 ohms, 100 W.
6. Resistive load	Variable 0 to 4 ohms, 500 W.
7. Resistive load	Fixed 270 ohms, 1/2 W, 5%
8. Resistive load	Variable 0 to 10 ohms, 250 W.
90 Switch, S1	SPST, 15A.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 , except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The converter shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the converter shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the converter shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in Procedures II and III, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating. This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.


4.7.1.5 Humidity (non-operating) This test shall be performed in accordance with procedure 111, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

4.7.3 Performance. The converters shall be tested as follows: Connect the test equipment to the converter as shown in Figure 1. Apply 26 $^{-2}_{+6}$ vdc to the converter using power supply (Table IV, item 1). Verify the outputs are available as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

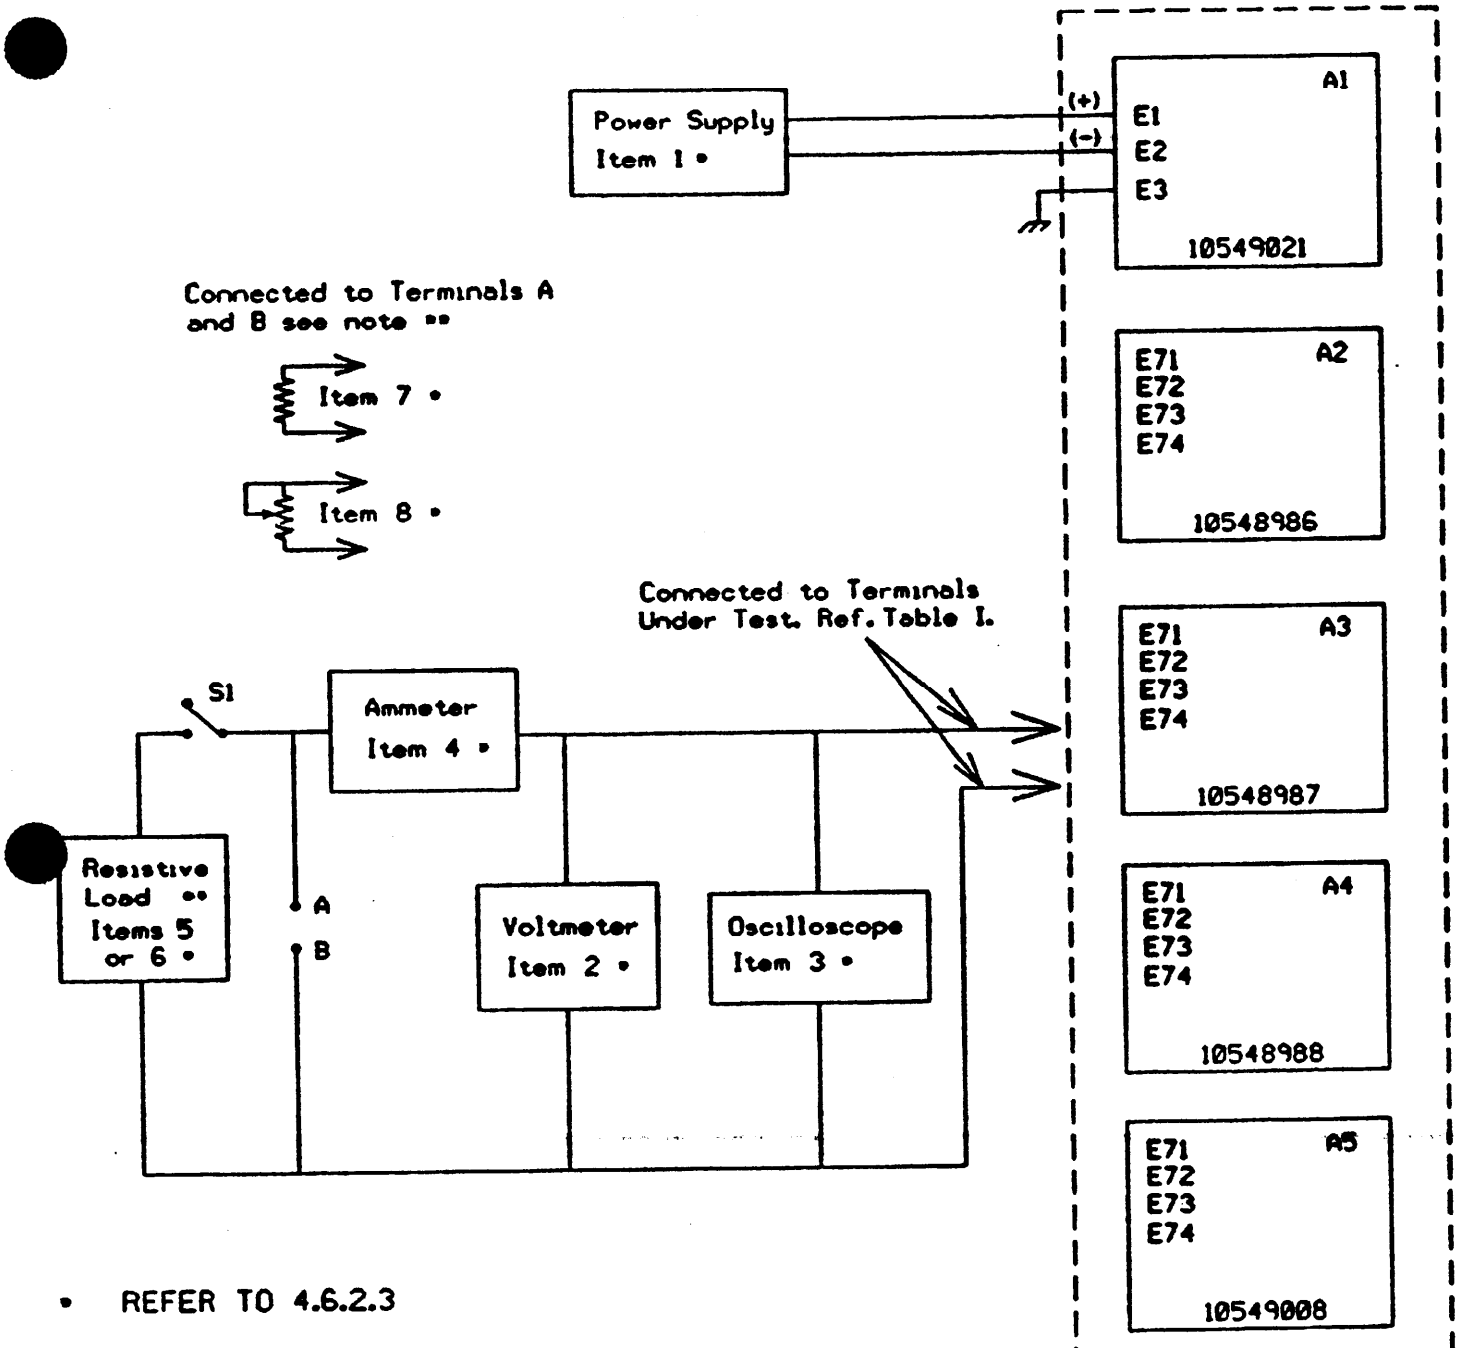

• REFER TO 4.6.2.3

•• USE ITEM 5 FOR MEASUREMENT OF A2, A3, AND A4.
USE ITEMS 6 AND 7 FOR MEASUREMENT OF A5, +6.5V.
USE ITEMS 6 AND 8 FOR MEASUREMENT OF A5, +29.3V.

FIGURE 1. Converter test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

5* PACKAGING

5.1 General. preservation, packing, and marking shall be in accordance with Packaging Data Sheet PS 10549013. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The converter is used in Power supply PP4812/VPS-2, part of Radar Set AN/VPS-2 and in Power Supply Sub-assembly PP6324/TPM-22, part of Radar Set AN/TPM-22. The converter assembly contains the circuits for producing and regulating eight output voltages used within the Radar Set AN/VPS-2 and Radar Test Set AN/TPM-22. The output voltages are +6.5, +23, -23, +33, -33, +15, -15 and +29.3 volts.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. Applicable stock number.
d. First article sample requirements.
e. Packaging requirements, if other than specified in Section 5.
f. Serialization requirements, if applicable.
g. Certificate of conformance for each lot or shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, Attn: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Fire Control System
Power Supply Subassembly PP4812/VPS-2
Power Supply Subassembly PP6324/TPM-22
Radar Set AN/VPS-2
Radar Test Set AN/TPM-22
Vulcan Air Defense System (VADS)

6.6 Changes from Previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

custodian :
Army-AR

Preparing activity:
Army-AR

(Project 1285-A696)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-50329C (AR)	19 SEPTEMBER 1991

3. DOCUMENT TITLE

CONVERTER, ELECTRONIC: 10549013

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.